



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 04/20/07	~~~~	LJC 04/20/07
B	整理图面	YCH 05/14/07	~~~~	LJC 05/14/07
C	整理图面	YCH 10/17/07	~~~~	LJC 05/14/07
I	ADD Packing Specification	JLZ 11/18/15'	~~~~	

NOTES:


- Insulation material: PVC
Color: Grey
- SPECIFICATION
 - Rating: 300V
 - Conductor Size: 28AWG or 30AWG.
 - Insulation resistance: 100MΩ/km min.
 - Operating temperature: -20°C~70°C.
- APPLICATION
 - Internal wiring of computers, electronic exchanges, measurement control devices, business machines, communication devices, and other electronic equipment.

4. Product Number Code
DS1057 - X X X X X-X

- Packing Specifications
 - 30.5: 30.5m/reel
 - 61.0: 61.0m/reel
 - 76.5: 76.5m/reel
 - 153.0: 153m/reel
 - 457.0: 457m/reel
- Edge mark
 - R: Red mark
 - F: Flower mark
- Wire diameter
 - 1: φ0.100 (30AWG)
 - 2: φ0.127 (28AWG)
 - 3: φ0.090 (SPECIAL)
- Wire AWG
 - 28: 28AWG
 - 30: 30AWG
 - T: SPECIAL (H)
- Cable color
 - A: Gray
 - S: Dark Grey (C)
- No. Of positions
 - 06: 6pin
 - 64: 64pin



Number	Dimensions			Max. conductor resistance DC 20°C Ω/m
	TP(mm)	W(mm)	Tolerance	
10	11.43	12.70	±0.30	φ0.100<0.397
14	16.51	17.78	±0.30	
16	19.05	20.32	±0.30	
20	24.13	25.40	±0.30	
24	29.21	30.48	±0.30	
26	31.75	33.02	±0.30	
30	36.83	38.10	±0.30	
34	41.91	43.18	±0.40	
40	49.53	50.80	±0.40	
50	62.23	63.50	±0.40	
60	74.93	76.20	±0.40	
64	80.01	81.28	±0.40	

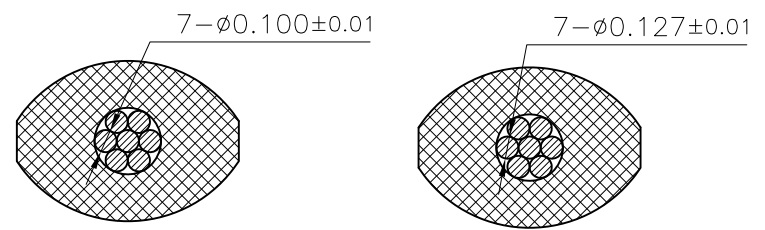

SECTION A-A (4:1) SECTION A-A (4:1)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	2651 GRAY FLAT CABLE	
X.	±0.60	X.	±5°	UNITS	mm	SHEET SIZE	A4	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1057	
.XX	±0.25	.XX	±2°			晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD		
DRAWING TYPE		CUSTOMER						
SCALE		1:1		SHEET 1 OF 1				
DRAWING NO.		C-DS1057-XXXXX-X-I						