

F_XT-1WR2 Series


**1W, FIXED INPUT, ISOLATED & UNREGULATED
SINGLE OUTPUT**



Patent Protected RoHS

PART NUMBER SYSTEM

F0505XT-1WR2

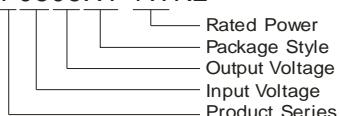

SELECTION GUIDE

Model	Input Voltage(VDC) Nominal (Range)	Output Voltage (VDC)	Output Current (mA)		Input Current (mA,Typ.)		Reflected Ripple Current (mA,Typ.)	Max. Capacitive Load(μF)	Efficiency (% , Typ.)
			Max.	Min.	@Max. Load	@No Load			
F0303XT-1WR2	3.3 (2.97-3.63)	3.3	303	30	415	25	15	220	73
F0305XT-1WR2		5	200	20	388				78
F0503XT-1WR2	5 (4.5-5.5)	3.3	303	30	263	20	15	220	76
F0505XT-1WR2		5	200	20	250				80
F0509XT-1WR2	9 (10.8-13.2)	9	111	12	250	15	15	220	80
F0512XT-1WR2		12	84	9	250				80
F0515XT-1WR2	15 (13.5-16.5)	15	67	7	250	10	7	220	80
F0524XT-1WR2		24	42	4	250				80
F1203XT-1WR2	12 (10.8-13.2)	3.3	303	30	111	15	15	220	75
F1205XT-1WR2		5	200	20	104				80
F1209XT-1WR2	15 (13.5-16.5)	9	111	12	104	10	7	220	80
F1212XT-1WR2		12	84	9	103				81
F1215XT-1WR2	15 (13.5-16.5)	15	67	7	103	10	7	220	81
F1515XT-1WR2		15	67	7	82				81
F2405XT-1WR2	24 (21.6- 26.4)	5	200	20	52	7	7	220	80
F2409XT-1WR2		9	110	11	52				80
F2415XT-1WR2	24 (21.6- 26.4)	15	67	7	51	7	7	220	81
F2424XT-1WR2		24	42	4	51				81

INPUT SPECIFICATIONS

Item	Test Conditions	Min.	Typ.	Max.	Unit
Input Surge Voltage (1 Sec. Max.)	3.3VDC Input	-0.7	--	5	VDC
	5VDC Input	-0.7	--	9	
	12VDC Input	-0.7	--	18	
	15VDC Input	-0.7	--	21	
	24VDC Input	-0.7	--	30	
Input Filter				Capacitor	

OUTPUT SPECIFICATIONS

Item	Test Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy	See tolerance envelope curve				
Line Regulation	For Vin change of $\pm 1\%$	3.3VDC output	--	--	± 1.5
		Others	--	--	± 1.2
Load Regulation	10% to 100% load	3.3VDC output	--	18	--
		5VDC output	--	12	--
		9VDC output	--	8	--
		12VDC output	--	7	--
		15VDC output	--	6	--
		24VDC output	--	5	--
Temperature coefficient	100% load	--	--	± 0.03	%/ $^{\circ}\text{C}$
Ripple & Noise*	20MHz Bandwidth	Output Voltage $\leq 12\text{VDC}$	--	30	--
		Output Voltage :15VDC, 24VDC	--	60	--
Short Circuit Protection		Continuous, automatic recovery			
Note: * Ripple and noise tested with "parallel cable" method. See detailed operation instructions at DC-DC Application Notes.					

COMMON SPECIFICATIONS

Item	Test Conditions	Min.	Typ.	Max.	Unit
Isolation Voltage	Input-Output, tested for 1 minute and leakage current less than 1 mA	3000	--	--	VDC
Isolation Resistance	Input-Output, test at 500VDC	1000	--	--	M Ω
Isolation Capacitance	Input-Output, 100KHz/0.1V	--	20	--	pF
Switching Frequency	Full load, nominal input	--	100	300	KHz
MTBF	MIL-HDBK-217F@25 $^{\circ}\text{C}$	3500	--	--	K hours
Case Material		Epoxy Resin (UL94-V0)			
Weight		--	1.5	--	g

ENVIRONMENTAL SPECIFICATIONS


Item	Test Conditions	Min.	Typ.	Max.	Unit
Storage Humidity	Non condensing	--	--	95	%
Operating Temperature	Power derating ($\geq 100\text{ }^{\circ}\text{C}$, see Figure 2)	-40	--	105	
Storage Temperature		-55	--	125	
Temperature rise	Ta=25 $^{\circ}\text{C}$, 100% Load	--	25	--	
Lead Temperature	1.5mm from case for 10 seconds	--	--	300	
Cooling		Free air convection			

EMC SPECIFICATIONS

EMI	CE	CISPR22/EN55022 CLASS B (Recommended Circuit Refer to Figure1)
	RE	CISPR22/EN55022 CLASS B (Recommended Circuit Refer to Figure1)
EMS	ESD	IEC/EN61000-4-2 Contact $\pm 8\text{kV}$ perf. Criteria B

EMC RECOMMENDED CIRCUIT



EMI Typical Recommended Circuit(CLASS B):

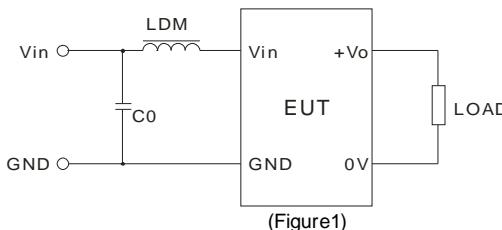



Recommended typical circuit parameters:

EMI	Vin(V)	3.3/5/12/15/24
	C0	4.7 μF /50V
	LDM	6.8 μH


EMI TEST WAVEFORM (CLASS B APPLY CIRCUIT)

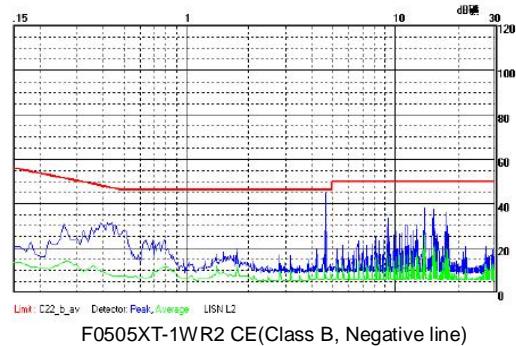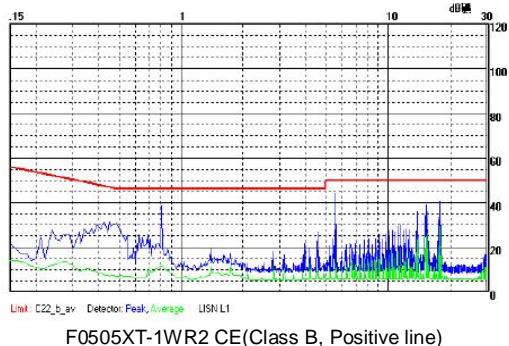


PRODUCT TYPICAL CURVE

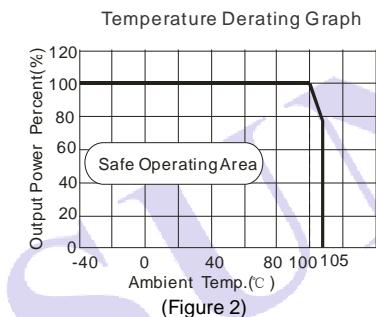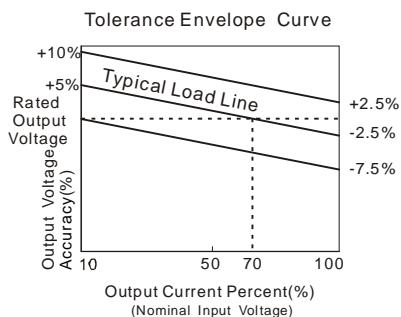


**Efficiency VS Input Voltage curve
(Full Load)**

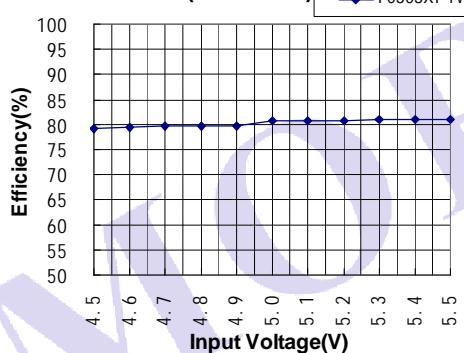


**Efficiency VS Output Load curve
(Vin=Vin-nominal)**

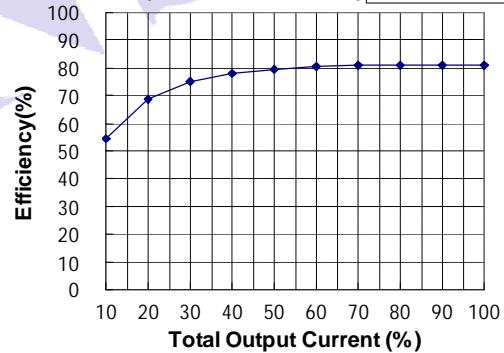


**Efficiency VS Input Voltage curve
(Full Load)**

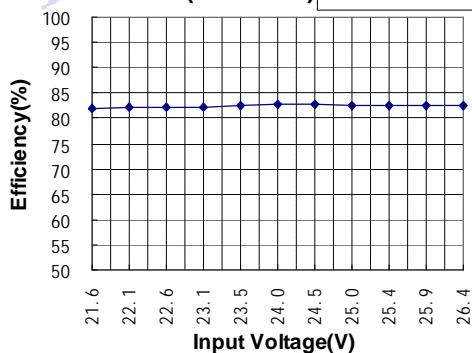

**Efficiency VS Output Load curve
(Vin=Vin-nominal)**

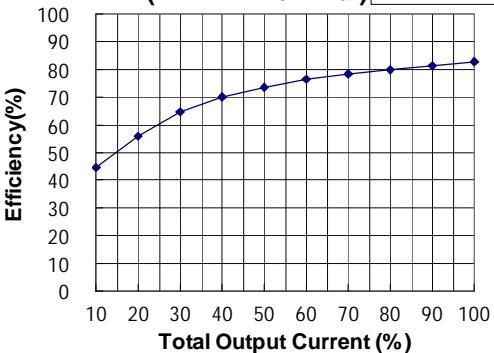

Recommended reflow soldering profile refer to IPC/JEDEC J-STD-020D standard, our products recommended reflow soldering profile as follow:

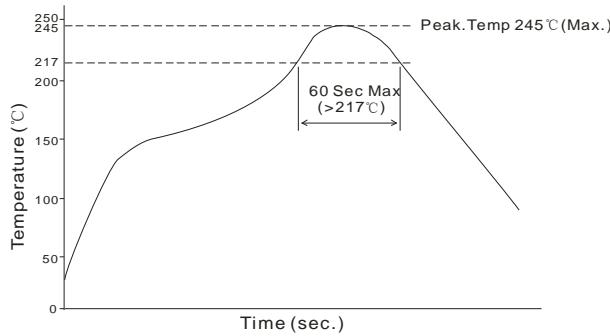

Note: The curve only applies to the hot air reflow soldering


DIMENSIONS, RECOMMENDED FOOTPRINT & PACKAGING

MECHANICAL DIMENSIONS		RECOMMENDED FOOTPRINT DETAILS															
			<p>Note : Grid 2.54*2.54mm</p> <table border="1"> <thead> <tr> <th colspan="2">PIN CONNECTION</th> </tr> <tr> <th>Pin</th> <th>Function</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>GND</td> </tr> <tr> <td>2</td> <td>Vin</td> </tr> <tr> <td>4</td> <td>0V</td> </tr> <tr> <td>5</td> <td>+Vo</td> </tr> <tr> <td>8</td> <td>NC</td> </tr> </tbody> </table> <p>NC:No Connection</p>	PIN CONNECTION		Pin	Function	1	GND	2	Vin	4	0V	5	+Vo	8	NC
PIN CONNECTION																	
Pin	Function																
1	GND																
2	Vin																
4	0V																
5	+Vo																
8	NC																
TUBE PACKAGING DIMENSIONS		REEL PACKAGING DIMENSIONS															
			<p>Note: Unit: mm[inch] General tolerances: ±0.50mm[±0.020inch] L=530[20.866inch] Quantity:40pcs L=220[8.661] Quantity:15pcs Inner carton(S):L'W'H'=255*170*80 Outer carton(S):L'W'H'=375*280*270 Inner carton(L):L'W'H'=580*200*100 Outer carton(L): L'W'H'=600*215*220.2 inner cartons(L) Outer carton(L): L'W'H'=600*215*325.3 inner cartons(L)</p> <p>Note: Unit: mm[inch] General tolerances: ±0.50[±0.020] Per reel of packing quantity:500pcs Inner carton:L'W'H=365*350*105 Quantity:2000pcs Outer carton:L'W'H=390*360*245 Quantity:4000pcs</p>														

TEST CONFIGURATIONS

Input Reflected-Ripple Current Test Setup

Input reflected-ripple current is measured with an inductor Lin and Capacitor Cin to simulate the source impedance.

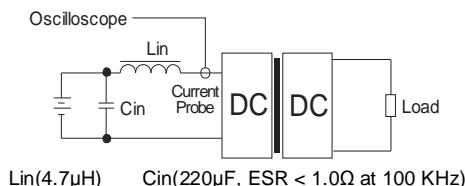

DESIGN CONSIDERATIONS

1) Requirement for output load

To ensure this module can operate efficiently and reliably, the minimum output load could not be less than 10% of the full load. If the actual output power is very small, please connect a resistor to the output in parallel to increase the load.


2) Overload Protection

Under normal operating conditions, the output circuit of these products have not overload protection. The simplest method is to add a breaker circuit in the circuit.

3) Recommended circuit

If you want to further decrease the input/output ripple, an capacitor filtering network may be connected to the input and output ends of the DC/DC converter, refer to Figure 3.

It should also be noted that the capacitance of the capacitor must be proper. If the capacitance is too large, a startup problem might arise. For ensuring every channel of output can provide a safe and reliable operation , the recommended capacitance of the capacitor refer to Table 1.

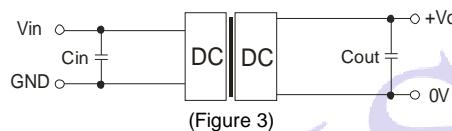

EXTERNAL CAPACITOR TABLE (Table 1)

Vin (VDC)	Cin (μF)	Vo (VDC)	Cout (μF)
3.3	4.7	3.3	10
5	4.7	5	10
12	2.2	9	4.7
15	2.2	12	2.2
24	1	15	1
-	--	24	0.47

It's not recommended to connect any external capacitor in the application field with less than 0.5 watt output.

4) The input and the output of the product are recommended to be connected to ceramic capacitor or electrolytic capacitor. Using tantalum capacitor may cause risk of failure

5) It is not recommended to increase the output power capability by connecting two or more converters in parallel. The product is not hot-swappable

Note:

1. Operation under minimum load will not damage the converter; However, they may not meet all specifications.
2. Max. Capacitive Load is tested at nominal input voltage and full load.
3. Unless otherwise noted, All specifications are measured at Ta=25°C, humidity<75%, nominal input voltage and rated output load.
4. In this datasheet, all test methods are based on our corporate standards.
5. All characteristics are for listed models, and non-standard models may perform differently. Please contact our technical support for more detail.
6. Please contact our technical support for any specific requirement.
7. Specifications of this product are subject to changes without prior notice.

MORNSUN Science & Technology Co.,Ltd.

Address: No. 5, Kehui St. 1, Kehui development center, Science Ave., Guangzhou Science City, Luogang district, Guangzhou,P.R.China.

Tel: 86-20-38601850

Fax:86-20-38601272

E-mail: info@mornsun.cn

[Http://www.mornsun-power.com](http://www.mornsun-power.com)