


WRA_CS-2W & WRB_CS-2W Series

2W, WIDE INPUT, ISOLATED & REGULATED
DUAL/SINGLE OUTPUT DC-DC CONVERTER

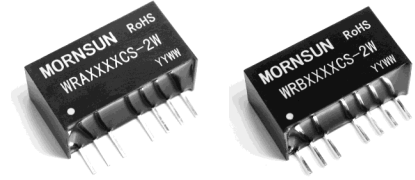

Patent Protection RoHS

FEATURES

Miniature SIP Package
Wide (2:1) Input Range
Regulated Outputs
I/O Isolation 1500VDC
Short Circuit Protection(automatic recovery)
External On/Off control
Internal SMD construction
Operating Temperature: -40°C to +85°C
RoHS Compliance


APPLICATIONS

The WRA_CS-2W & WRB_CS-2W Series are specially designed for applications where a wide range input voltage power supplies are isolated from the input power supply in a distributed power supply system on a circuit board.

These products apply to:

- 1) Where the voltage of the input power supply is wide range (voltage range $\leq 2:1$);
- 2) Where isolation is necessary between input and output (isolation voltage $\leq 1500\text{VDC}$);
- 3) Where the regulation of the output voltage and the output ripple noise are demanded.

MODEL SELECTION

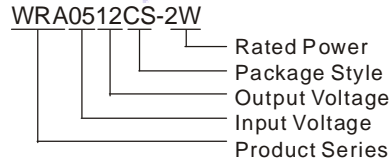

PRODUCT PROGRAM

Part Number	Input			Output			Efficiency (% Typ)			
	Voltage (VDC)		No Load (mA)(Typ)	Voltage (VDC)	Current (mA)					
	Nominal(Range)	Max*			Max	Min				
WRA0505CS-2W	5 (4.5-9.0)	11	40	±5	±200	±20	67			
WRA0509CS-2W				±9	±111	±11	71			
WRA0512CS-2W				±12	±83	±8	72			
WRA0515CS-2W				±15	±67	±7	73			
WRA0524CS-2W				±24	±42	±4	72			
WRB0503CS-1W6				12 (9.0-18)	22	20	3.3	500	50	64
WRB0505CS-2W							5	400	40	67
WRB0509CS-2W							9	222	22	72
WRB0512CS-2W							12	167	16	73
WRB0515CS-2W							15	133	13	72
WRB0524CS-2W							24	80	8	71
WRA1205CS-2W							24 (18-36)	40	10	±5
WRA1209CS-2W	±9	±111	±11							74
WRA1212CS-2W	±12	±83	±8							78
WRA1215CS-2W	±15	±67	±7							77
WRB1203CS-1W6	3.3	500	50							68
WRB1205CS-2W	5	400	40							75
WRB1209CS-2W	9	222	22	77						
WRB1212CS-2W	12	167	16	79						
WRB1215CS-2W	15	133	13	80						
WRB1224CS-2W	24	80	8	78						
WRA2405CS-2W	48 (36-72)	80	5	±5	±200	±20				76
WRA2409CS-2W				±9	±111	±11				78
WRA2412CS-2W				±12	±83	±8	79			
WRA2415CS-2W				±15	±67	±7	78			
WRB2403CS-1W6				3.3	500	50	67			
WRB2405CS-2W				5	400	40	77			
WRB2409CS-2W				9	222	22	79			
WRB2412CS-2W				12	167	16	80			
WRB2415CS-2W				15	133	13	80			
WRB2424CS-2W				24	80	8	80			
WRA4805CS-2W				48 (36-72)	80	5	±5	±200	±20	75
WRA4809CS-2W							±9	±111	±11	78
WRA4812CS-2W	±12	±83	±8				79			
WRA4815CS-2W	±15	±67	±7				79			
WRB4803CS-1W6	3.3	500	50				71			
WRB4805CS-2W	5	400	40				75			
WRB4809CS-2W	9	222	22				76			
WRB4812CS-2W	12	167	16				78			
WRB4815CS-2W	15	133	13				78			
WRB4824CS-2W	24	80	8				80			

* Input voltage can't exceed this value, or will cause the permanent damage.

Note: Operation under 10% load will not damage the converter; However, they may not meet all specification listed.

MORNSUN Science & Technology Co.,Ltd.

Address: No. 5, Kehui St. 1, Kehui development center, Science Ave., Guangzhou Science City, Luogang district, Guangzhou, P.R. China.

Tel: 86-20-28203030

Fax: 86-20-28203068

[Http://www.mornsun-power.com](http://www.mornsun-power.com)

COMMON SPECIFICATION

Item	Test Conditions	Min	Typ	Max	Units
Storage Humidity				95	%
Operating Temperature		-40		85	°C
Storage Temperature		-50		125	
Temp. Rise at Full Load			15	35	
Lead Temperature	1.5mm from case for 10 seconds			300	
Isolation voltage	Tested for 1 minute and 1mA max	1500			VDC
Isolation resistance	Test at 500VDC	1000			MΩ
Isolation Capacitance	Input/Output, 100KHz/1V		80		PF
No-load power consumption			100		mW
Cooling		Free Air Convection			
Short Circuit Protection		Continuous			
Case Material		Plastic(UL94-V0)			
MTBF		1000			K hours
Weight			5.5		g

OUTPUT SPECIFICATIONS

Item	Test Conditions	Min	Typ	Max	Units
Output Voltage accuracy	Input voltage range refer to output load		±1	±3	%
Load Regulation	10% to 100% load(WRB_CS-2W)		±0.5	±0.75	
	10% to 100% load(WRA_CS-2W)		±0.5	±1.0	
Line Regulation	Input voltage from Low To high		±0.2	±0.5	
Temperature Drift (Vout)	Refer to recommended circuit			±0.03	%/°C
Ripple & Noise *	20MHz Bandwidth		35	100	mVp-p
Switching Frequency	Input voltage range 100% load		180-500(PFM)		KHz


*Test ripple and noise by "parallel cable" method. See detailed operation instructions at Testing of Power Converter section, application notes.

Note:



1. All specifications measured at T_A=25°C, humidity<75%, nominal input voltage and rated output load unless otherwise specified.

2. See below recommended circuits for more details

TYPICAL TEMPERATURE CURVE



OUTLINE DIMENSIONS & FOOTPRINT DETAILS

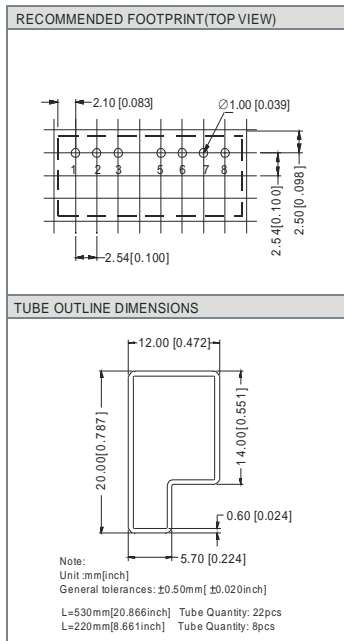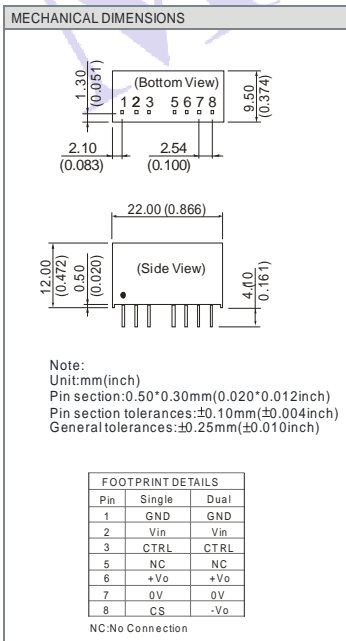

APPLICATION NOTE

① CTRL Terminal


When open or high impedance, the converter work well; When this pin is 'high', the converter shutdown; It should be note that the input current (I_c) should between 5-10mA, exceeding the maximum 20mA will cause permanence damage to the converter. The value of R Can be derived as follows :

$$R = \frac{V_C - V_D - 1.0}{I_C}$$


② Recommended circuit

If you want to further decrease the input/output ripple, an "LC" filtering network may be connected to the input and output ends of the DC/DC converter, see (Figure 1).

Single Output

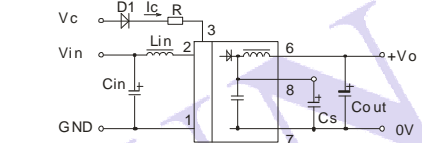

Dual Output

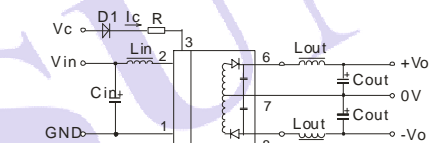

(Figure 1)

However, the capacitance of the output filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. For every channel of output, provided the safe and reliable operation is ensured, the greatest capacitance of its filter capacitor sees (Table 1). General:

Cin: 5V,12V 100μF
 24V,48V 10μF - 22μF
 Lin: 4.7μH -120μH
 Cout: 100μF(typ)
 Lout: 2.2μH-10μH
 Cs: 10μF - 22μF


External Capacitor Table (Table 1)

Single Vout (VDC)	Cout (uF)	Dual Vout (VDC)	Cout (uF)
3.3	2200	-	-
5	1000	±5	560
9	820	±9	470
12	680	±12	330
15	560	±15	270
24	470	±24	100

③ Input current

While using unstable power source, please ensure the output voltage and ripple voltage do not exceed indexes of the converter. The preceding power source must be able to provide for converter sufficient starting current I_p (Figure 2).

General: I_p ≤ 1.4*I_{in-max}



④ No parallel connection or plug and play.