


MORNSUN®


WRE_P - 3WR2 & WRF_P - 3WR2 Series 3W, WIDE INPUT, ISOLATED & REGULATED DUAL/SINGLE OUTPUT, DC-DC CONVERTER

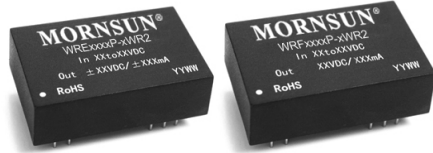

Patent Protected RoHS

PART NUMBER SYSTEM

WRE2405P-3WR2

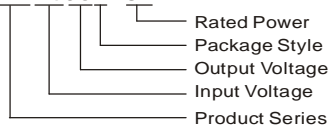

FEATURES

- 2:1 wide input voltage range
- DIP package
- Efficiency up to 86%
- 3KVDC isolation
- Short circuit protection(automatic recovery)
- Operating temperature range:
-40°C ~ +85°C
- Meet CISPR22/EN55022 CLASS A

APPLICATION

The WRE_P-3WR2 & WRF_P-3WR2 Series are specially designed for applications where a wide range input voltage power supplies are isolated from the input power supply in a distributed power supply system on a circuit board. For these DC-DC converters, you can reduce the failure points of design, and save the manpower, material and time cost in developing micro power supply, and also ensure better quality, stability, safety protection, and reliability for the end products.

These products apply to where:

- 1) Input voltage range $\leq 2:1$;
- 2) 3KVDC input and output isolation;
- 3) Output regulated and low ripple noise is required.

SELECTION GUIDE

Model	Input Voltage(VDC)		Output Voltage (VDC)	Output Current (mA)		Input Current (mA)(Typ.)		Reflected Ripple Current (mA,Typ.)	Max. Capacitive Load ^② (μF)	Efficiency (% ,Typ.) @Max. Load				
	Nominal (Range)	Max. ①		Max.	Min.	@Max. Load	@No Load							
WRE0505P-3WR2	5 (4.5-9)	11	±5	±300	±15	790	40	20	2200	76				
WRE0512P-3WR2			±12	±125	±6	770			1800	78				
WRE0515P-3WR2			±15	±100	±5	770			1000	78				
WRF0505P-3WR2			5	600	30	811			4700	74				
WRF0512P-3WR2			12	250	12	780			2700	77				
WRF0515P-3WR2			15	200	10	780			2200	77				
WRE1205P-3WR2	12 (9-18)	20	±5	±300	±15	309	30	30	2200	81				
WRE1209P-3WR2			±9	±166	±8	298			2000	84				
WRE1212P-3WR2			±12	±125	±6	298			1800	84				
WRE1215P-3WR2			±15	±100	±5	295			1000	85				
WRF1203P-3WR2			3.3	909	46	338			4700	74				
WRF1205P-3WR2			5	600	30	309			4700	81				
WRF1212P-3WR2			12	250	12	302			2700	83				
WRF1215P-3WR2			15	200	10	305			2200	82				
WRF1224P-3WR2			24	125	6	302			1800	83				
WRE2405P-3WR2			24 (18-36)	40	±5	±300			±15	153	15	30	2200	82
WRE2412P-3WR2	±12	±125			±6	149	1800	84						
WRE2415P-3WR2	±15	±100			±5	149	1000	84						
WRF2403P-3WR2	3.3	909			46	160	4700	78						
WRF2405P-3WR2	5	600			30	155	4700	81						
WRF2412P-3WR2	12	250			12	146	2700	86						
WRF2415P-3WR2	15	200			10	146	2200	86						
WRF2424P-3WR2	24	125			6	147	1800	85						
WRE4803P-3WR2	48 (36-75)	80			3.3	909	46	82	5	30			4700	76
WRE4805P-3WR2					±5	±300	±15	77					2200	82
WRE4812P-3WR2			±12	±125	±6	75	1800	84						

WRE4815P-3WR2	48 (36-75)	80	±15	±100	±5	74	5	30	1000	85
WRF4805P-3WR2			5	600	30	77			4700	82
WRF4812P-3WR2			12	250	12	73			2700	86
WRF4815P-3WR2			15	200	10	73			2200	86

Note:①. Absolute maximum rating without damage on the converter, but it isn't recommended;
②. For dual output converter, the given value is the same for each output.

INPUT SPECIFICATIONS

Item	Test Conditions	Min.	Typ.	Max.	Unit
Input Surge Voltage (1sec. max.)	5VDC input	-0.7	--	12	VDC
	12VDC input	-0.7	--	25	
	24VDC input	-0.7	--	50	
	48VDC input	-0.7	--	100	
Start-up Voltage	5VDC input	3.5	4	4.5	
	12VDC input	4.5	8	9	
	24VDC input	11	16	18	
	48VDC input	24	33	36	
Input Filter		Pi Filter			

OUTPUT SPECIFICATIONS

Item	Test Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy	5% to 100% load	--	±1	±3	%
No load output Voltage Accuracy	Input voltage range	--	±1.5	±5	
Output Voltage Balance	Dual output, balanced loads	--	±0.5	±1	
Line Regulation	Full load, Input voltage from low to high	--	±0.2	±0.5	
Load Regulation	5% to 100% load	--	±0.2	±0.5	
Transient Recovery Time	25% load step change	--	0.5	2	ms
Transient Response Deviation		--	±2	±5	%
Temperature coefficient	100% load	--	±0.02	±0.03	%/°C
Ripple*	20MHz bandwidth	--	15	30	mVp-p
Noise*		--	50	80	
Output Short Circuit Protection	Input voltage range	Continuous, automatic recovery			

Note: * Ripple and noise tested with "parallel cable" method. See detailed operation instructions at DC-DC Application Notes.

COMMON SPECIFICATIONS

Item	Test Conditions	Min.	Typ.	Max.	Unit
Isolation Voltage	Tested for 1 minute, leakage current less than 1 mA	3000	--	--	VDC
Isolation Resistance	Test at 500VDC	1000	--	--	MΩ
Isolation Capacitance	Input/Output, 100KHz/0.1V	--	30	50	pF
Switching Frequency(PFM mode)	100% load, nominal input voltage	--	200	--	KHz
MTBF	MIL-HDBK-217F @25°C	1000	--	--	K hours
Case Material		Plastic (UL94-V0)			
Weight		--	14	--	g


ENVIRONMENTAL SPECIFICATIONS

Item	Test Conditions	Min.	Typ.	Max.	Unit
Storage Humidity	Non condensing	--	--	95	%
Operating Temperature	Power derating(above85°C, see Figure 5)	-40	--	85	°C
Storage Temperature		-55	--	125	
Temp. rise at full load	Ta=25°C	--	25	--	
Lead Temperature	1.5mm from case for 10 seconds	--	--	300	
Cooling		Free air convection			

EMC SPECIFICATIONS

EMI	CE	CISPR22/EN55022 CLASS A(Without External Circuit)/ CLASS B (Recommended Circuit Refer to Figure1-② or Figure 3)		
	RE	CISPR22/EN55022 CLASS A(Without External Circuit)/ CLASS B (Recommended Circuit Refer to Figure1-② or Figure 3)		
EMS	ESD	IEC/EN61000-4-2	Contact ±4KV/ Air ±8KV perf. Criteria B	
	RS	IEC/EN61000-4-3	10V/m perf. Criteria A	
	EFT	IEC/EN61000-4-4	±2KV (Recommended Circuit Refer to Figure1-①)	perf. Criteria B
		IEC/EN61000-4-4	±4KV (Recommended Circuit Refer to Figure 3)	perf. Criteria B
	Surge	IEC/EN61000-4-5	±2KV (Recommended Circuit Refer to Figure1-① or Figure 3)	perf. Criteria B
	CS	IEC/EN61000-4-6	3 Vr.m.s perf. Criteria A	
Voltage dips, short and interruptions immunity		IEC/EN61000-4-29	0%-70% perf. Criteria B	

EMC RECOMMENDED CIRCUIT

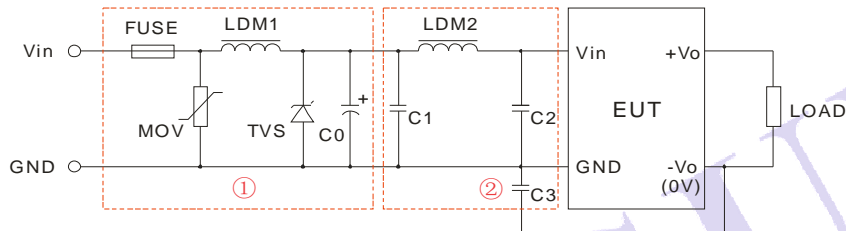


(Figure1)

parameters	Vin:5V	Vin:12V	Vin:24V	Vin:48V
FUSE	Choose according to practical input current			
MOV	--	--	S14K35	S14K60
LDM1	--	--	56μH	
TVS	SMCJ13A	SMCJ28A	SMCJ48A	SMCJ90A
C0	680μF/16V	680μF/25V	330μF/50V	330μF/100V
C1	4.7μF/50V			4.7μF/100V
LDM2	12μH			
C2	4.7μF/50V			4.7μF/100V
C3	1nF/3KV			

Note: 1. In Figure 1, part ① is EMS Recommended external circuit, part ② is EMI recommended external circuit. Choose according to requirements;
2. If there is no recommended parameters, the model no require the external component.


EMC RECOMMENDED CIRCUIT PCB LAYOUT

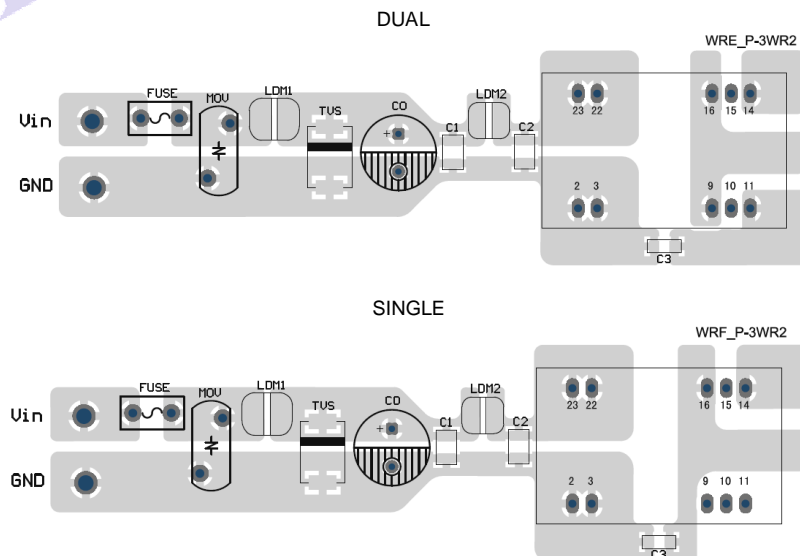

(Figure 2)


Note: The space between input and output GND (C3) must ≥2mm.

EMC MODULE APPLICATION CIRCUIT

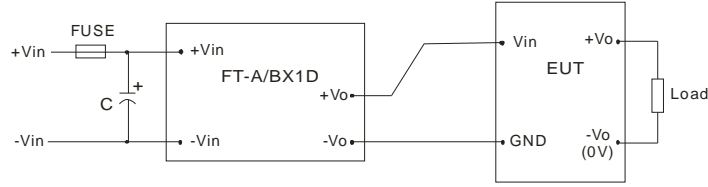


Nominal Input Voltage <math>< 48V</math>,
 Nominal Input Voltage = $48V</math>,
 FT-A/BX1D is MORNSUN's EFT suppressor
 (Figure 3)$

EMC MODULE RECOMMENDED CIRCUIT PCB LAYOUT

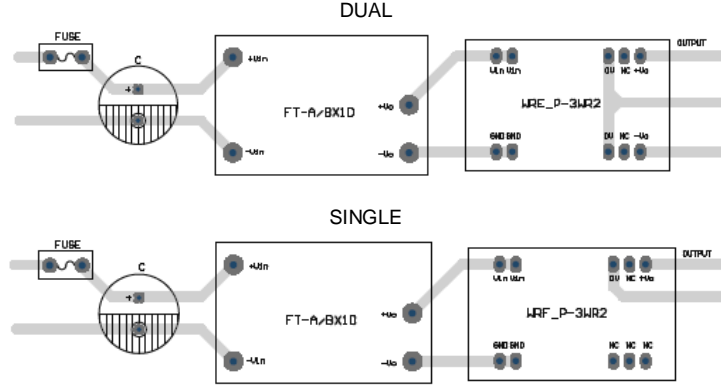


(Figure 4)

EMI TEST WAVEFORM (RECOMMENDED CIRCUIT FIGURE 1-②)

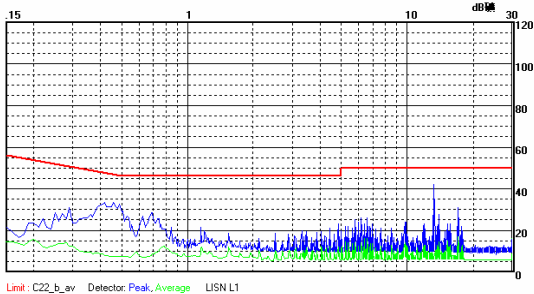


WRF2405P-3WR2 CE(Class B, Positive line)

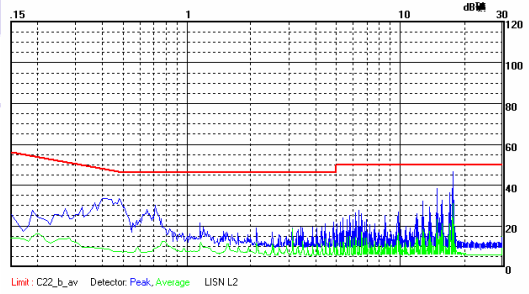

WRF2405P-3WR2 CE(Class B, Negative line)


PRODUCT TYPICAL PERFORMANCE CURVE

Temperature Derating Graph

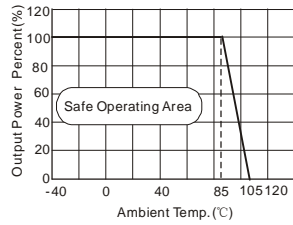




(Figure 5)

Efficiency VS Input Voltage curve (Full Load)


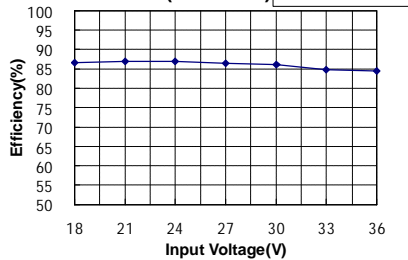


Efficiency VS Output Load curve (Vin=Vin-nominal)

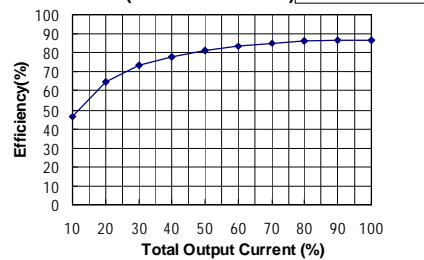

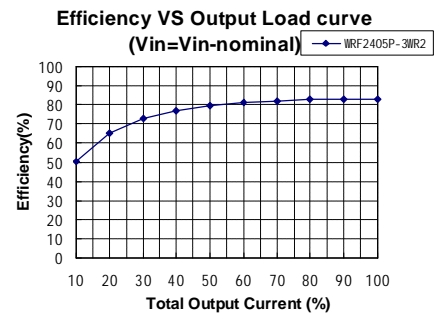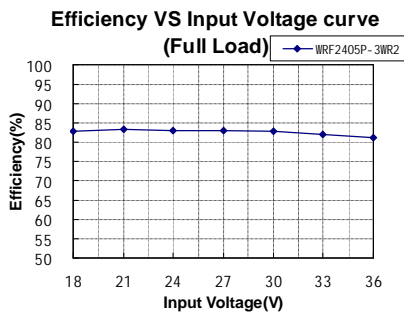


MECHANICAL DIMENSIONS, RECOMMENDED FOOTPRINT & PACKAGING

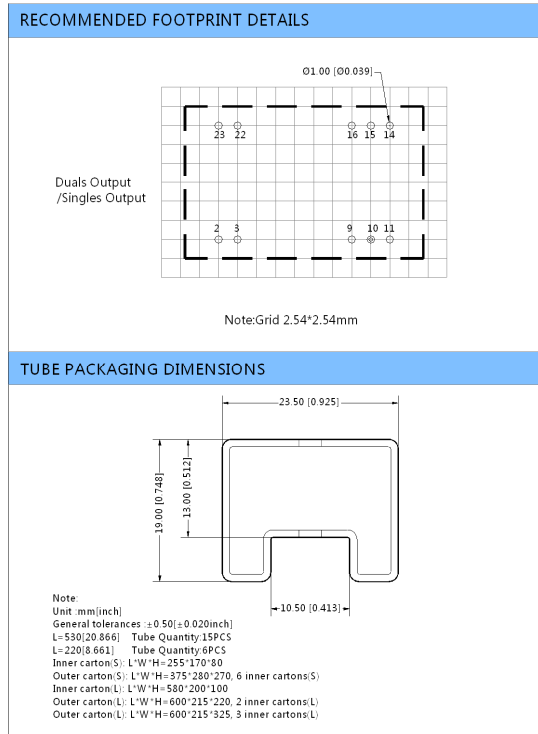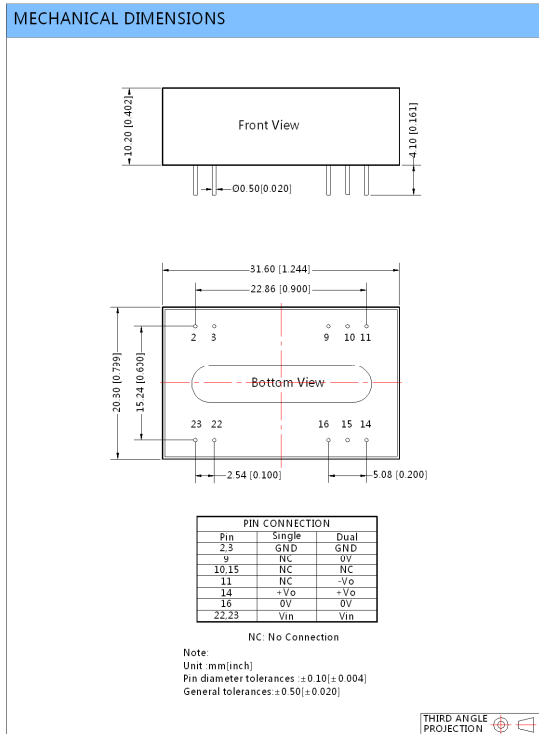

TEST CONFIGURATIONS

Input Reflected-Ripple Current Test Setup

Input reflected-ripple current is measured with an inductor L_{in} and Capacitor C_{in} to simulate the source impedance.

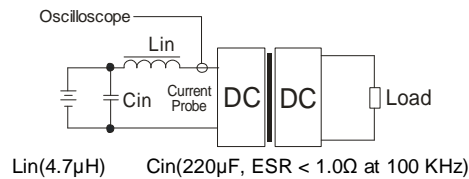

DESIGN CONSIDERATIONS

1) Requirement on output load


To ensure this module can operate efficiently and reliably, during operation, the minimum output load could not be less than 5% of the full load, otherwise ripple may increase dramatically. If the actual output power is very small, please connect a resistor with proper resistance at the output end in parallel to increase the load, suppose to use the resistance of 5% rated power, or use our company's products with a lower rated output power.

2) Recommended circuit

All the WRE_P-3WR2 & WRF_P-3WR2 Series have been tested according to the following recommended test circuit before leaving the factory (See Figure 6).

If you want to further decrease the input/output ripple, you can increase a capacitance-values properly or choose capacitors with low ESR. However, the capacitance of the output filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. For every channel of output, provided the safe and reliable operation is ensured, the greatest capacitance of its filter capacitor must be less than the Max. Capacitive Load.


General: Cin: 5V&12V 100μF
24V&48V 10μF~47μF
Cout: 10μF/100mA

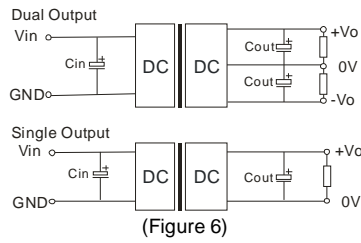

3) Input current

When it is used in unregulated power supply, be sure that the fluctuating range of the power supply and the rippled voltage do not exceed the module standard. Input current of power supply should afford the flash startup average current of this kind of DC/DC module (Figure 7).

General:	Vin:5V	Iave =1400mA
	Vin:12V	Iave =620mA
	Vin:24V	Iave =310mA
	Vin:48V	Iave =150mA

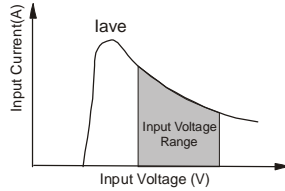

4) It is not recommended to increase the output power capability by connecting two or more converters in parallel. The product is not hot-swappable.

Note:

1. Min. load shouldn't be less than 5%, otherwise ripple maybe increased dramatically. If the product operates under min. load, it may not be guaranteed to meet all specifications listed. Operation with minimum load will not damage the converter.
2. Recommended Dual output models unbalanced load is $\leq \pm 5\%$, if the product operates $> \pm 5\%$, it may not be guaranteed to meet all specifications listed. Please contact our technical support for more details.
3. Max. Capacitive Load is tested at nominal input voltage and full load.
4. All specifications measured at $T_a=25^\circ\text{C}$, humidity $<75\%$, nominal input voltage and rated output load unless otherwise specified.
5. In this datasheet, all test methods are based on our corporate standards.
6. All characteristics are for listed models, and non-standard models may perform differently. Please contact our technical support for more details.
7. Please contact our technical support for any specific requirement.
8. Specifications of this product are subject to changes without prior notice.

MORNSUN Science & Technology Co.,Ltd.

Address: No. 5, Kehui St. 1, Kehui development center, Science Ave., Guangzhou Science City, Luogang district, Guangzhou,P.R.China.

Tel: 86-20-38601850

Fax:86-20-38601272

E-mail: info@mornsun.cn

[Http://www.mornsun-power.com](http://www.mornsun-power.com)