

## **Two-Wire Serial EEPROM**

### **2K (16-bit wide)**

#### **一、FEATURES**

- Low voltage and low power operations:
  - AT24C02N-XXX: VCC = 1.8V to 5.5V, Industrial temperature range (-40°C to 85°C).
- Maximum Standby current < 1μA (typically 0.02μA and 0.06μA @ 1.8V and 5.5V respectively).
- 16 bytes page write mode.
- Partial page write operation allowed.
- Internally organized: 256 × 8 (2K).
- Standard 2-wire bi-directional serial interface.
- Schmitt trigger, filtered inputs for noise protection.
- Self-timed programming cycle (5ms maximum).
- 1 MHz (5V), 400 kHz (1.8V, 2.5V, 2.7V) Compatibility.
- Automatic erase before write operation.
- High reliability: typically 1,000,000 cycles endurance.
- 100 years data retention.
- Standard 8-pin DIP/SOP/TSSOP and 5-pin SOT-23 Pb-free packages.

#### **二、DESCRIPTION**

The AT24C02N-XXX is 2048 bits of serial Electrical Erasable and Programmable Read Only Memory, commonly known as EEPROM. They are organized as 256 words of 8 bits (1 byte) each. The devices are fabricated with proprietary advanced CMOS process for low power and low voltage applications. These devices are available in standard 8-lead DIP, 8-lead SOP, 8-lead MSOP, 8-lead TSSOP, 8-lead DFN and 5-lead SOT-23/TSOT-23 packages. A standard 2-wire serial interface is used to address all read and write functions. Our extended V<sub>CC</sub> range (1.8V to 5.5V) devices enables wide spectrum of applications.

三、PIN CONFIGURATION

| Pin Name | Pin Function                        |
|----------|-------------------------------------|
| SDA      | Serial Data Input/Open Drain Output |
| SCL      | Serial Clock Input                  |
| VCC      | Power Supply                        |
| GND      | Ground                              |
| NC       | No-Connect                          |

Table 1

All these packing types come in conventional or Pb-free certified.

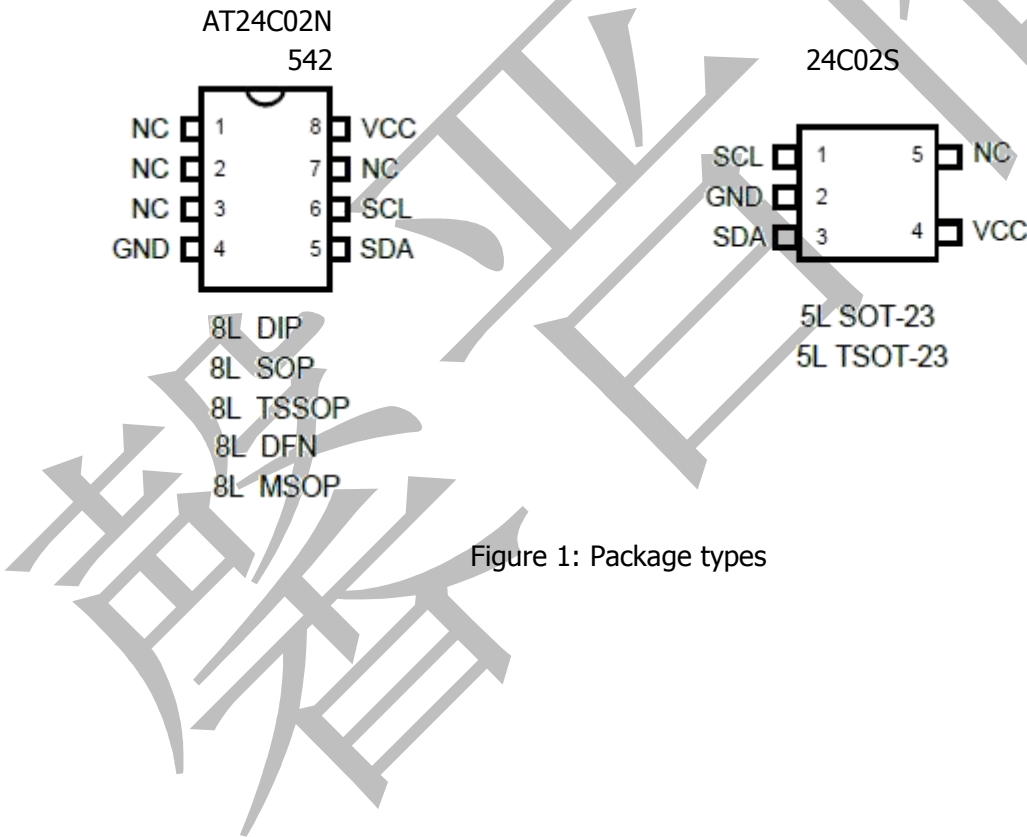


Figure 1: Package types

#### 四、ABSOLUTE MAXIMUM RATINGS

Industrial operating temperature: -40°C to 85°C

Storage temperature: -50°C to 125°C

Input voltage on any pin relative to ground: -0.3V to  $V_{CC} + 0.3V$

Maximum voltage: 8V

ESD protection on all pins: >2000V

\* Stresses exceed those listed under "Absolute Maximum Rating" may cause permanent damage to the device. Functional operation of the device at conditions beyond those listed in the specification is not guaranteed. Prolonged exposure to extreme conditions may affect device reliability or functionality.

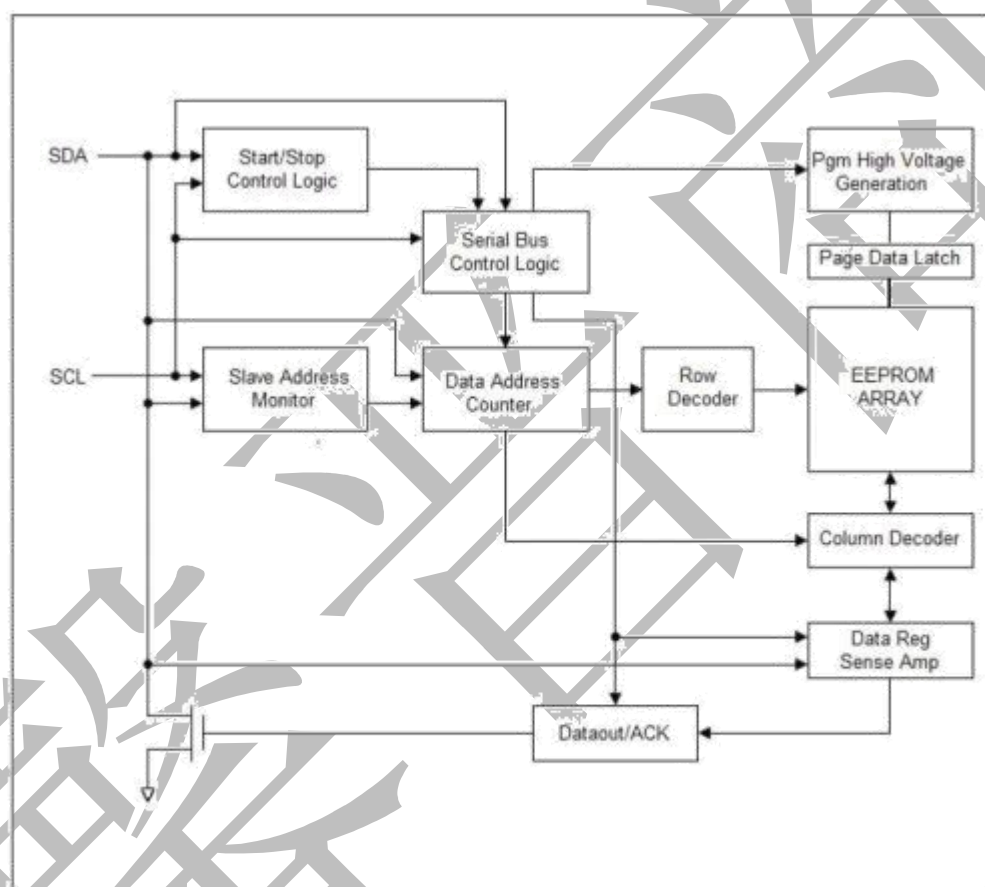


Figure 2: Block Diagram

#### 五、PIN DESCRIPTIONS

##### 1. SERIAL CLOCK (SCL)

The rising edge of this SCL input is to latch data into the EEPROM device while the falling edge of this clock is to clock data out of the EEPROM device.

##### 2. SERIAL DATA LINE (SDA)

SDA data line is a bi-directional signal for the serial devices. It is an open drain output signal and can be wired-OR with other open-drain output devices.

## 六、MEMORY ORGANIZATION

The AT24C02N-XXX devices have 16 pages. Since each page has 16 bytes, random word addressing to AT24C02N-XXX will require 8 bits data word addresses.

## 七、DEVICE OPERATION

### 1. SERIAL CLOCK AND DATA TRANSITIONS

The SDA pin is typically pulled to high by an external resistor. Data is allowed to change only when Serial clock SCL is at  $V_{IL}$ . Any SDA signal transition may interpret as either a START or STOP condition as described below.

### 2. START CONDITION

With  $SCL \geq V_{IH}$ , a SDA transition from high to low is interpreted as a START condition. All valid commands must begin with a START condition.

### 3. STOP CONDITION

With  $SCL \geq V_{IH}$ , a SDA transition from low to high is interpreted as a STOP condition. All valid read or write commands end with a STOP condition. The device goes into the STANDBY mode if it is after a read command. A STOP condition after page or byte write command will trigger the chip into the STANDBY mode after the self-timed internal programming finish.

### 4. ACKNOWLEDGE

The 2-wire protocol transmits address and data to and from the EEPROM in 8 bit words. The EEPROM acknowledges the data or address by outputting a "0" after receiving each word. The ACKNOWLEDGE signal occurs on the 9th serial clock after each word.

### 5. STANDBY MODE

The EEPROM goes into low power STANDBY mode after a fresh power up, after receiving a STOP bit in read mode, or after completing a self-time internal programming operation.

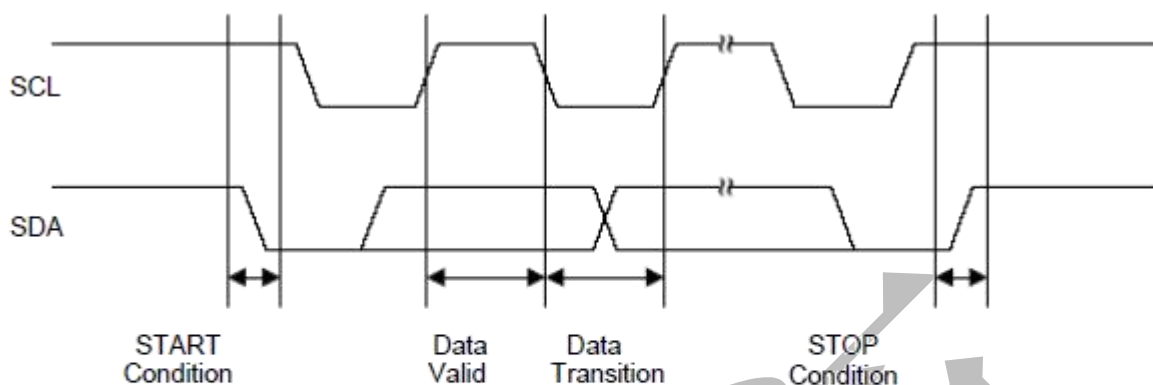


Figure 3: Timing diagram for START and STOP conditions

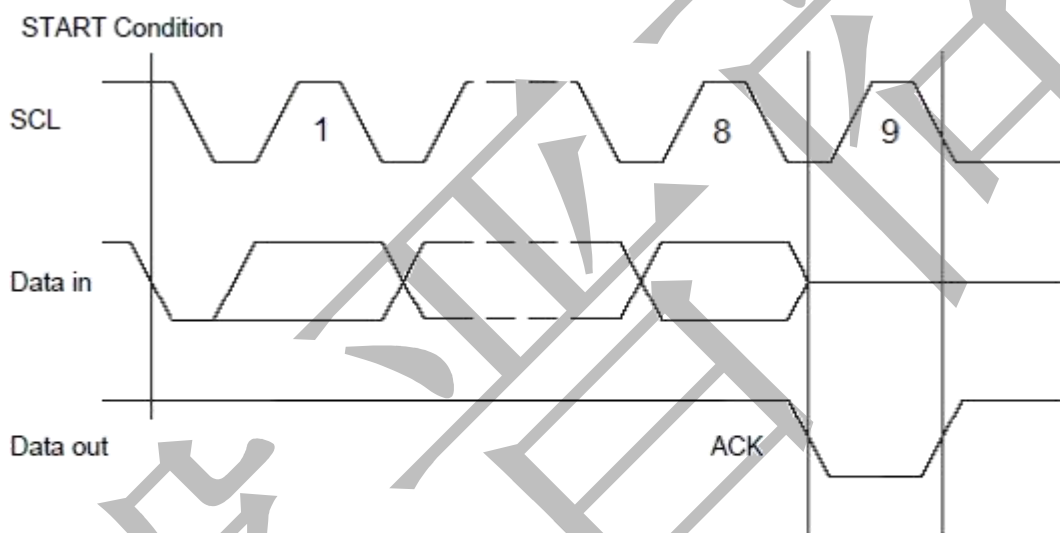


Figure 4: Timing diagram for output ACKNOWLEDGE

## 八、DEVICE ADDRESSING

The 2-wire serial bus protocol mandates an 8 bits device address word after a START bit condition to invoke valid read or write command. The first four most significant bits of the device address must be 1010, which is common to all serial EEPROM devices. The next three bits are device address bits. These three device address bits (5th, 6th and 7th) are not cared and could be coded from 000 (b) to 111 (b). Only one AT24C02N-XXX device can be used on the on 2-wire bus. If a match is made, the EEPROM device outputs an ACKNOWLEDGE signal after the 8th read/write bit, otherwise the chip will go into STANDBY mode.

The last or 8th bit is a read/write command bit. If the 8th bit is at VIH then the chip goes into read mode. If a "0" is detected, the device enters programming mode.

### 九、WRITE OPERATIONS

#### 1. BYTE WRITE

A byte write operation starts when a micro-controller sends a START bit condition, followed by a proper EEPROM device address and then a write command. If the device address bits match the chip select address, the EEPROM device will acknowledge at the 9<sup>th</sup> clock cycle. The micro-controller will then send the rest of the lower 8 bits word address. At the 18<sup>th</sup> cycle, the EEPROM will acknowledge the 8-bit address word. The micro-controller will then transmit the 8 bit data. Following an ACKNOWLEDGE signal from the EEPROM at the 27<sup>th</sup> clock cycle, the micro-controller will issue a STOP bit. After receiving the STOP bit, the EEPROM will go into a self-timed programming mode during which all external inputs will be disabled. After a programming time of T<sub>WC</sub>, the byte programming will finish and the EEPROM device will return to the STANDBY mode.

#### 2. PAGE WRITE

A page write is similar to a byte write with the exception that one to sixteen bytes can be programmed along the same page or memory row. All AT24C02N-XXX are organized to have 16 bytes per memory row or page.

With the same write command as the byte write, the micro-controller does not issue a STOP bit after sending the 1<sup>st</sup> byte data and receiving the ACKNOWLEDGE signal from the EEPROM on the 27<sup>th</sup> clock cycle. Instead it sends out a second 8-bit data word, with the EEPROM acknowledging at the 36<sup>th</sup> cycle. This data sending and EEPROM acknowledging cycle repeats until the micro-controller sends a STOP bit after the  $n \times 9^{\text{th}}$  clock cycle. After which the EEPROM device will go into a self-timed partial or full page programming mode. After the page programming completes after a time of T<sub>WC</sub>, the devices will return to the STANDBY mode.

The least significant 4 bits of the word address (column address) increments internally by one after receiving each data word. The rest of the word address bits (row address) do not change internally, but pointing to a specific memory row or page to be programmed. The first page write data word can be of any column address. Up to 16 data words can be loaded into a page. If more than 16 data words are loaded, the 9<sup>th</sup> data word will be loaded to the 1<sup>st</sup> data word column address. The 10<sup>th</sup> data word will be loaded to the 2<sup>nd</sup> data word column address and so on. In other words, data word address (column address) will "roll" over the previously loaded data.

#### 3. ACKNOWLEDGE POLLING

ACKNOWLEDGE polling may be used to poll the programming status during a self-timed internal programming. By issuing a valid read or write address command, the EEPROM will not acknowledge at the 9<sup>th</sup> clock cycle if the device is still in the self-timed programming mode. However, if the programming completes and the chip has returned to the STANDBY mode, the device will return a valid ACKNOWLEDGE signal at the 9<sup>th</sup> clock cycle.

### 十、READ OPERATIONS

The read command is similar to the write command except the 8<sup>th</sup> read/write bit in address word is set to "1". The three read operation modes are described as follows:

#### 1. CURRENT ADDRESS READ

The EEPROM internal address word counter maintains the last read or write address plus one if the power supply to the device has not been cut off. To initiate a current address read

operation, the micro-controller issues a START bit and a valid device address word with the read/write bit (8<sup>th</sup>) set to "1". The EEPROM will response with an ACKNOWLEDGE signal on the 9<sup>th</sup> serial clock cycle. An 8-bit data word will then be serially clocked out. The internal address word counter will then automatically increase by one. For current address read the micro-controller will not issue an ACKNOWLEDGE signal on the 18<sup>th</sup> clock cycle. The micro-controller issues a valid STOP bit after the 18<sup>th</sup> clock cycle to terminate the read operation. The device then returns to STANDBY mode.

## 2. SEQUENTIAL READ

The sequential read is very similar to current address read. The micro-controller issues a START bit and a valid device address word with read/write bit (8<sup>th</sup>) set to "1". The EEPROM will response with an ACKNOWLEDGE signal on the 9<sup>th</sup> serial clock cycle. An 8-bit data word will then be serially clocked out. Meanwhile the internally address word counter will then automatically increase by one. Unlike current address read, the micro-controller sends an ACKNOWLEDGE signal on the 18<sup>th</sup> clock cycle signaling the EEPROM device that it wants another byte of data. Upon receiving the ACKNOWLEDGE signal, the EEPROM will serially clocked out an 8-bit data word based on the incremented internal address counter. If the micro-controller needs another data, it sends out an ACKNOWLEDGE signal on the 27<sup>th</sup> clock cycle. Another 8-bit data word will then be serially clocked out. This sequential read continues as long as the micro-controller sends an ACKNOWLEDGE signal after receiving a new data word. When the internal address counter reaches its maximum valid address, it rolls over to the beginning of the memory array address. Similar to current address read, the micro-controller can terminate the sequential read by not acknowledging the last data word received, but sending a STOP bit afterwards instead.

## 3. RANDOM READ

Random read is a two-steps process. The first step is to initialize the internal address counter with a target read address using a "dummy write" instruction. The second step is a current address read. To initialize the internal address counter with a target read address, the micro-controller issues a START bit first, follows by a valid device address with the read/write bit (8<sup>th</sup>) set to "0". The EEPROM will then acknowledge. The micro-controller will then send the address word. Again the EEPROM will acknowledge. Instead of sending a valid written data to the EEPROM, the micro-controller performs a current address read instruction to read the data. Note that once a START bit is issued, the EEPROM will reset the internal programming process and continue to execute the new instruction - which is to read the current address.



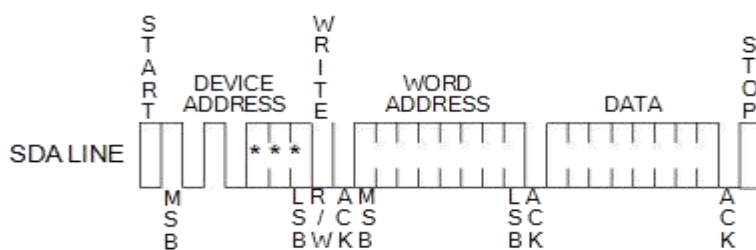


Figure 5: Byte Write

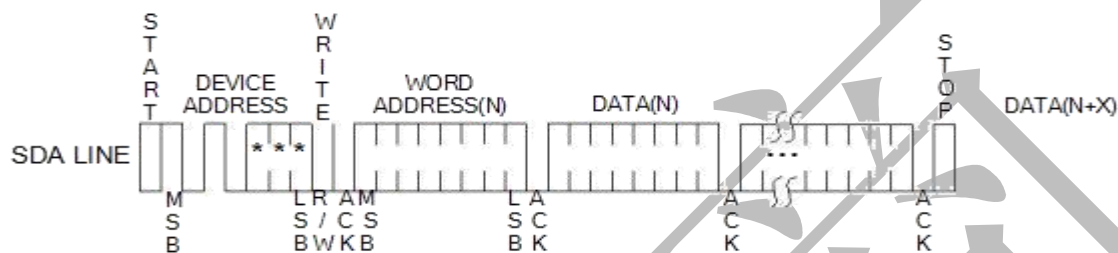


Figure 6: Page Write

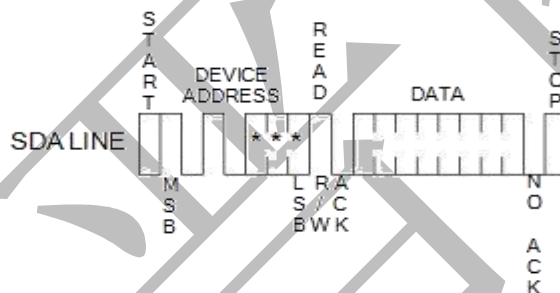


Figure 7: Current Address Read

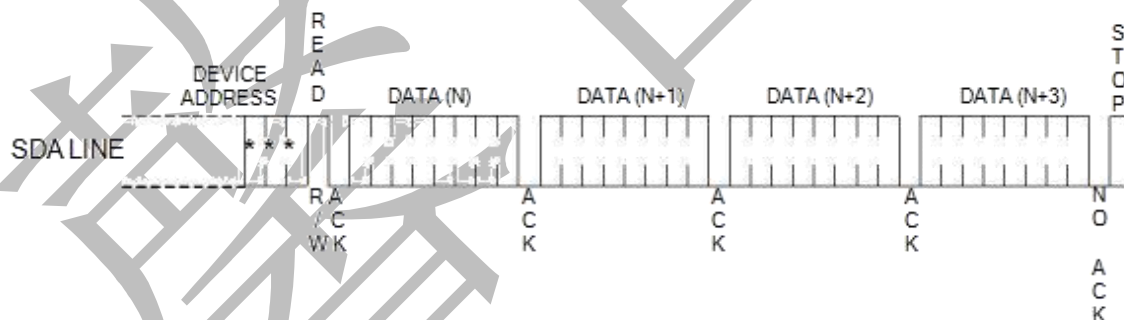


Figure 8: Sequential Read

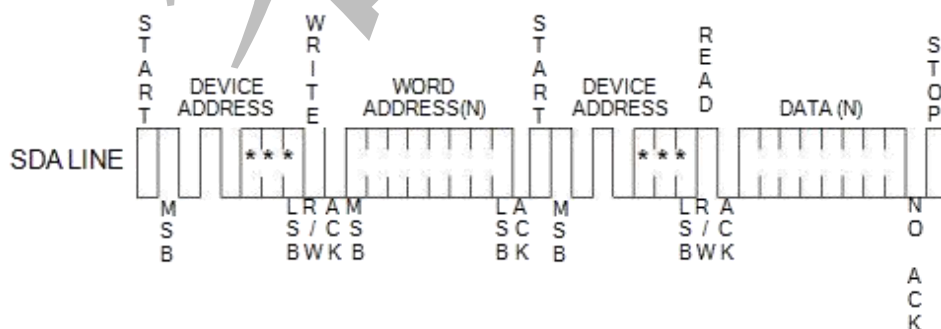


Figure 9: Random Read



## 十一、AC CHARACTERISTICS

| Symbol                   | Parameter  | 1.8V      |     | 2.5V-5.0V |      | Unit         |
|--------------------------|--|-----------|-----|-----------|------|--------------|
|                          |  | Min       | Max | Min       | Max  |              |
| $f_{SCL}$                | Clock frequency, SCL   |           | 400 |           | 1000 | KHz          |
| $t_{LOW}$                | Clock pulse width low  | 1.3       |     | 0.4       |      | $\mu$ S      |
| $t_{HIGH}$               | Clock pulse width high   | 0.6       |     | 0.4       |      | $\mu$ S      |
| $T_I$                    | Noise suppression time <sup>(1)</sup>  |           | 180 |           | 120  | nS           |
| $t_{AA}$                 | Clock low to data out valid  | 0.3       | 0.9 | 0.2       | 0.55 | $\mu$ S      |
| $t_{BUF}$                | Time the bus must be free before a new transmission can start <sup>(1)</sup> | 1.3       |     | 0.5       |      | $\mu$ S      |
| $t_{HD.STA}$             | START hold time  | 0.6       |     | 0.25      |      | $\mu$ S      |
| $t_{SU.STA}$             | START set-up time  | 0.6       |     | 0.25      |      | $\mu$ S      |
| $t_{HD.DAT}$             | Data in hold time  | 0         |     | 0         |      | $\mu$ S      |
| $T_{SU.DAT}$             | Data in set-up time  | 100       |     | 100       |      | nS           |
| $t_R$                    | input rise time <sup>(1)</sup>   |           | 0.3 |           | 0.3  | $\mu$ S      |
| $t_F$                    | Input fall time <sup>(1)</sup>   |           | 300 |           | 100  | nS           |
| $t_{SU.STO}$             | STOP set-up time   | 0.6       |     | 0.25      |      | $\mu$ S      |
| $t_{DH}$                 | Date out hold time   | 50        |     | 50        |      | nS           |
| WR                       | Write cycle time   |           | 5   |           | 5    | mS           |
| Endurance <sup>(1)</sup> | 25 °C, Page Mode, 3.3V   | 1,000,000 |     |           |      | Write Cycles |

**Notes\*:**


1. This Parameter is expected by characterization but is not fully screened by test.
2. AC Measurement conditions:  
 $R_L$  (Connects to Vcc): 1.3K $\Omega$   
 Input Pulse Voltages: 0.3Vcc to 0.7Vcc  
 Input and output timing reference Voltages: 0.5Vcc

## 十二、DC CHARACTERISTICS

| Symbol           | Parameter                    | Test Conditions  | Min                   | Typical | Max                   | Units |
|------------------|------------------------------|--|-----------------------|---------|-----------------------|-------|
| V <sub>CC1</sub> | Power supply V <sub>CC</sub> |  | 1.8                   |         | 5.5                   | V     |
| I <sub>CC</sub>  | Supply read current          | V <sub>CC</sub> @ 5.0V SCL = 400 kHz   |                       | 0.5     | 1.0                   | mA    |
| I <sub>CC</sub>  | Supply write current         | V <sub>CC</sub> @ 5.0V SCL = 400 kHz   |                       | 2.0     | 3.0                   | mA    |
| I <sub>SB1</sub> | Supply current               | V <sub>CC</sub> @ 1.8V, V <sub>IN</sub> = V <sub>CC</sub> or V <sub>SS</sub> |                       |         | 1.0                   | μA    |
| I <sub>SB2</sub> | Supply current               | V <sub>CC</sub> @ 2.5V, V <sub>IN</sub> = V <sub>CC</sub> or V <sub>SS</sub> |                       |         | 1.0                   | μA    |
| I <sub>SB3</sub> | Supply current               | V <sub>CC</sub> @ 5.0V, V <sub>IN</sub> = V <sub>CC</sub> or V <sub>SS</sub> |                       | 0.07    | 1.0                   | μA    |
| I <sub>IL</sub>  | Input leakage current        | V <sub>IN</sub> = V <sub>CC</sub> or V <sub>SS</sub>                         |                       |         | 3.0                   | μA    |
| I <sub>LO</sub>  | Output leakage current       | V <sub>IN</sub> = V <sub>CC</sub> or V <sub>SS</sub>                         |                       |         | 3.0                   | μA    |
| V <sub>IL</sub>  | Input low level              |  | -0.6                  |         | V <sub>CC</sub> × 0.3 | V     |
| V <sub>IH</sub>  | Input high level             |  | V <sub>CC</sub> × 0.7 |         | V <sub>CC</sub> + 0.5 | V     |
| V <sub>OL1</sub> | Output low level             | V <sub>CC</sub> @ 1.8V, I <sub>OL</sub> = 0.15 mA                            |                       |         | 0.2                   | V     |
| V <sub>OL2</sub> | Output low level             | V <sub>CC</sub> @ 3.0V, I <sub>OL</sub> = 2.1 mA                             |                       |         | 0.4                   | V     |


## 十三、PACKAGE

## DIP8

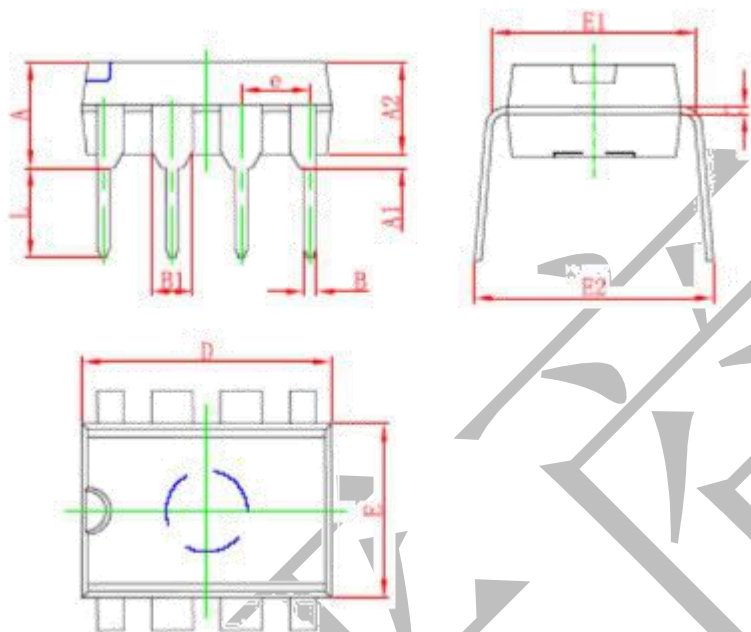


| Symbol | Dimensions In Millimeters |       | Dimensions In Inches |       |
|--------|---------------------------|-------|----------------------|-------|
|        | Min                       | Max   | Min                  | Max   |
| A      | 3.710                     | 4.310 | 0.146                | 0.170 |
| A1     | 0.510                     |       | 0.020                |       |
| A2     | 3.200                     | 3.600 | 0.126                | 0.142 |
| B      | 0.380                     | 0.570 | 0.015                | 0.022 |
| B1     | 1.524 (BSC)               |       | 0.060 (BSC)          |       |
| C      | 0.204                     | 0.360 | 0.008                | 0.014 |
| D      | 9.000                     | 9.400 | 0.354                | 0.370 |
| E      | 6.200                     | 6.600 | 0.244                | 0.260 |
| E1     | 7.320                     | 7.920 | 0.288                | 0.312 |
| e      | 2.540 (BSC)               |       | 0.100 (BSC)          |       |
| L      | 3.000                     | 3.600 | 0.118                | 0.142 |
| E2     | 8.400                     | 9.000 | 0.331                | 0.354 |

SOP

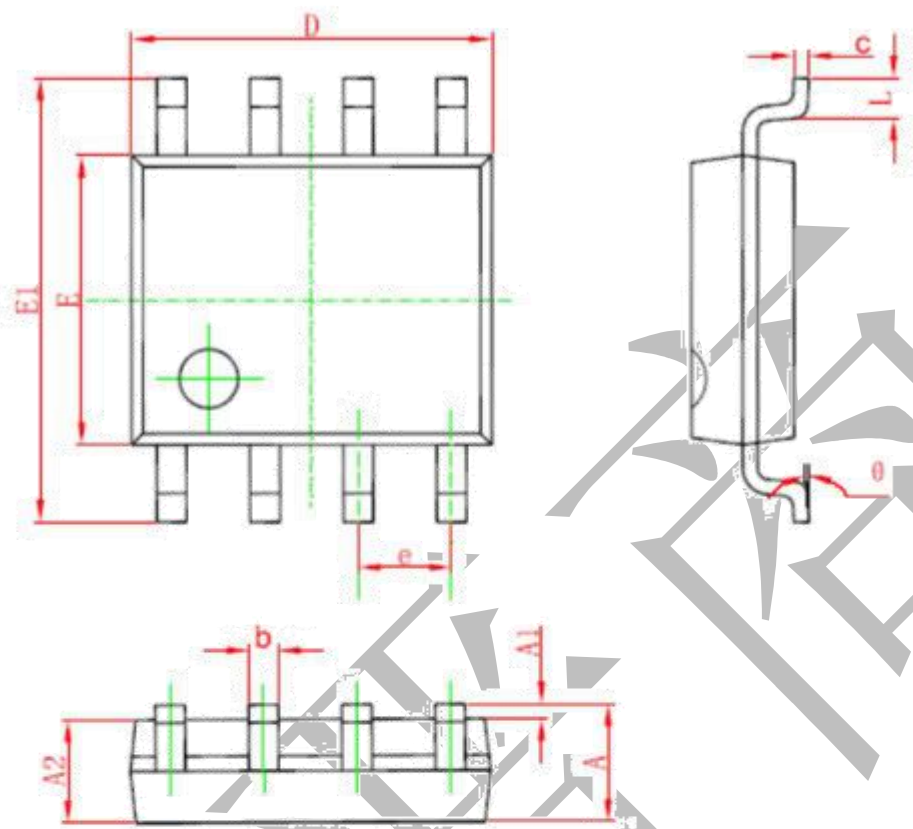


| Symbol | Dimensions In Millimeters |       | Dimensions In Inches |       |
|--------|---------------------------|-------|----------------------|-------|
|        | Min                       | Max   | Min                  | Max   |
| A      | 1.350                     | 1.750 | 0.053                | 0.069 |
| A1     | 0.100                     | 0.250 | 0.004                | 0.010 |
| A2     | 1.350                     | 1.550 | 0.053                | 0.061 |
| b      | 0.330                     | 0.510 | 0.013                | 0.020 |
| c      | 0.170                     | 0.250 | 0.006                | 0.010 |
| D      | 4.700                     | 5.100 | 0.185                | 0.200 |
| E      | 3.800                     | 4.000 | 0.150                | 0.157 |
| E1     | 5.800                     | 6.200 | 0.228                | 0.244 |
| e      | 1.270 (BSC)               |       | 0.050 (BSC)          |       |
| L      | 0.400                     | 1.270 | 0.016                | 0.050 |
| θ      | 0°                        | 8°    | 0°                   | 8°    |

TSSOP8

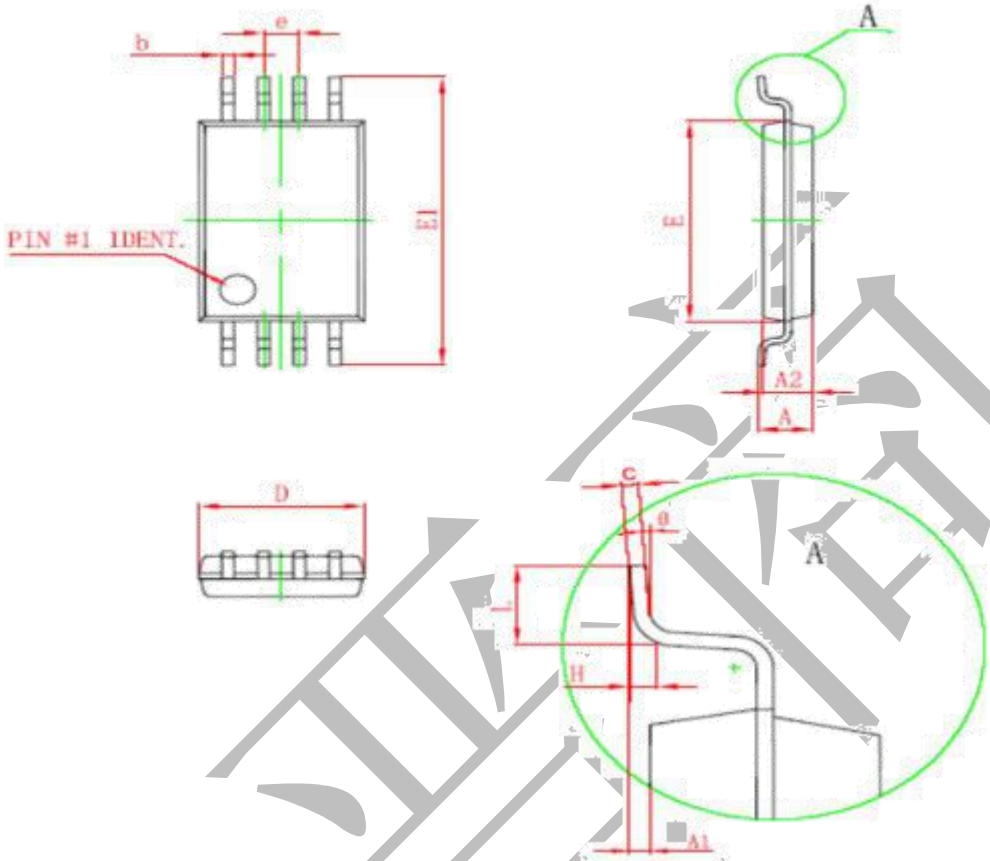

| Symbol | Dimensions In Millimeters |       | Dimensions In Inches |       |
|--------|---------------------------|-------|----------------------|-------|
|        | Min                       | Max   | Min                  | Max   |
| D      | 2.900                     | 3.100 | 0.114                | 0.122 |
| E      | 4.300                     | 4.500 | 0.169                | 0.177 |
| b      | 0.190                     | 0.300 | 0.007                | 0.012 |
| c      | 0.090                     | 0.200 | 0.004                | 0.008 |
| E1     | 6.250                     | 6.550 | 0.246                | 0.258 |
| A      |                           | 1.100 |                      | 0.043 |
| A2     | 0.800                     | 1.000 | 0.031                | 0.039 |
| A1     | 0.020                     | 0.150 | 0.001                | 0.006 |
| e      | 0.65 (BSC)                |       | 0.026 (BSC)          |       |
| L      | 0.500                     | 0.700 | 0.020                | 0.028 |
| H      | 0.25 (TYP)                |       | 0.01 (TYP)           |       |
| θ      | 1°                        | 7°    | 1°                   | 7°    |

SOT23-5

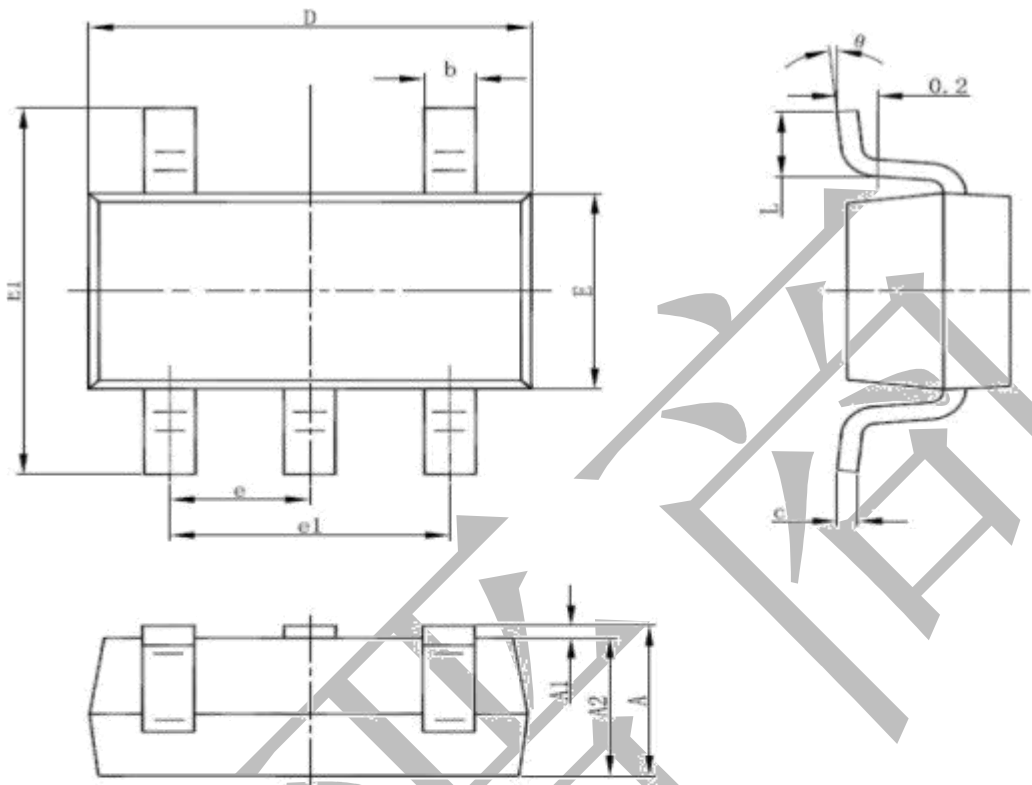

| Symbol | Dimensions In Millimeters |       | Dimensions In Inches |       |
|--------|---------------------------|-------|----------------------|-------|
|        | Min                       | Max   | Min                  | Max   |
| A      | 1.050                     | 1.250 | 0.041                | 0.049 |
| A1     | 0.000                     | 0.100 | 0.000                | 0.004 |
| A2     | 1.050                     | 1.150 | 0.041                | 0.045 |
| b      | 0.300                     | 0.500 | 0.012                | 0.020 |
| c      | 0.100                     | 0.200 | 0.004                | 0.008 |
| D      | 2.820                     | 3.020 | 0.111                | 0.119 |
| E      | 1.500                     | 1.700 | 0.059                | 0.067 |
| E1     | 2.650                     | 2.950 | 0.104                | 0.116 |
| e      | 0.95 (BSC)                |       | 0.037 (BSC)          |       |
| e1     | 1.800                     | 2.000 | 0.071                | 0.079 |
| L      | 0.300                     | 0.600 | 0.012                | 0.024 |
| θ      | 0°                        | 8°    | 0°                   | 6°    |