

1. Basic Features

- Short circuit protection
- Current limitation
- Overload protection
- Over voltage protection
- Over temperature protection
- Undervoltage shutdown with auto- restart and hysteresis
- Clamp of negative voltage at output with inductive loads
- Very low standby current
- Reverse battery protection with external resistor
- Green Product(RoHS compliant)
- AEC-Q100 qualified

3. Application

- μ C compatible power switch for 12V and 24V DC applications
- All types of resistive, inductive and capacitive loads
- Replaces electromechanical relays, fuses and discrete circuits

2. Description

RM75200 is a Smart High-side Power Switch that guarantees smooth on-off of the power tube under all conditions, while being able to connect to inductive loads and having inductive load fast.

RM75200 integrates multiple protection functions. Overload protection, Current limitation, Short circuit protection, Over temperature protection, Over voltage protection, Clamp of negative voltage at output, Fast deenergizing of inductive loads, Electrostatic discharge (ESD) protection.

4. Product Summary

Overvoltage protection	$V_{bb(AZ)}$	53	V
Operating voltage	$V_{bb(ON)}$	6...45	V
On-state resistance	R_{ON}	200	m Ω
Nominal load current	$I_{L(NOM)}$	0.7	A
Short circuit current limit	$I_{L(SCP)}$	1.2	A

5. Ordering Code


Device	Package Type	Marking	Materials	Package			Package Qty
RM75200SS	SOT-223	RM75200SS	Halogen free	Tape&reel	10 reels/box	30k/box	3000/reel
RM75200ESA	ESOP8L	RM75200ESA	Halogen free	Tape&reel	10 reels/box	40k/box	4000/reel
RM75200ESB	ESOP8L	RM75200ESB	Halogen free	Tape&reel	10 reels/box	40k/box	4000/reel

Table of Contents

1.Basic Features	1
2.Description	1
3.Application	1
4.Product Summary	1
5.Ordering Code	1
6.Pin Configuration	3
7.Block Diagram	5
8.Absolute Maximum Ratings	6
9.Electrical Characteristics	7
10.Timing diagrams	9
11.General Product Characteristics	13
12.Functions	16
13.Application Information	18
14.Package	19
15.Recommended Soldering Footprint	21
16.Revision History	22


6.Pin Configuration

RM75200SS (SOT-223)

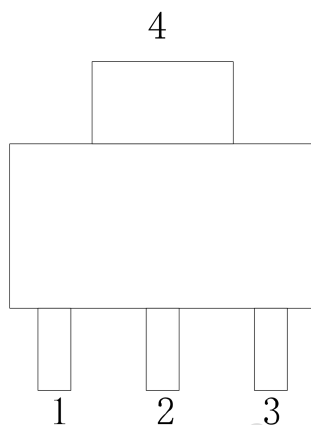


Pin	Symbol	Function
1	OUT	Output to the load
2	GND	Logic ground
3	IN	Input; activates the power switch in case of logic high signal
4	Vbb	Positive power supply voltage

RM75200ESA (ESOP8L)

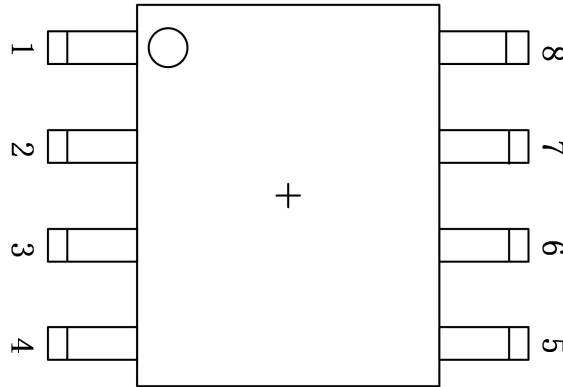


Pin	Symbol	Function
1	GND	Logic ground
2	IN	Input; activates the power switch in case of logic high signal
3/4/5	NC	No internal connection to the chip
6/7/8	OUT	Output to the load
Tab	V _{bb}	Positive power supply voltage

RM75200ESB (ESOP8L)

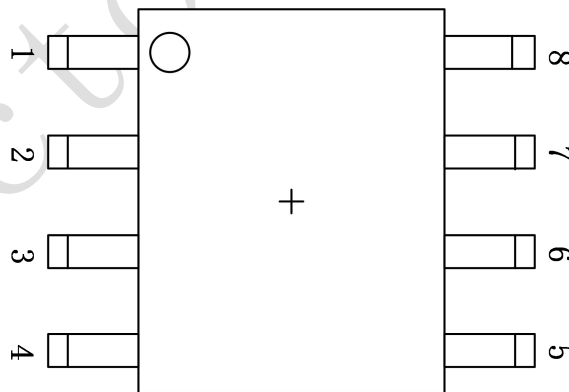

Pin	Symbol	Function
1/2	V _{bb}	Positive power supply voltage
3/6	NC	No internal connection to the chip
4	GND	Logic ground
5	IN	Input; activates the power switch in case of logic high signal
7/8	OUT	Output to the load

7. Block Diagram

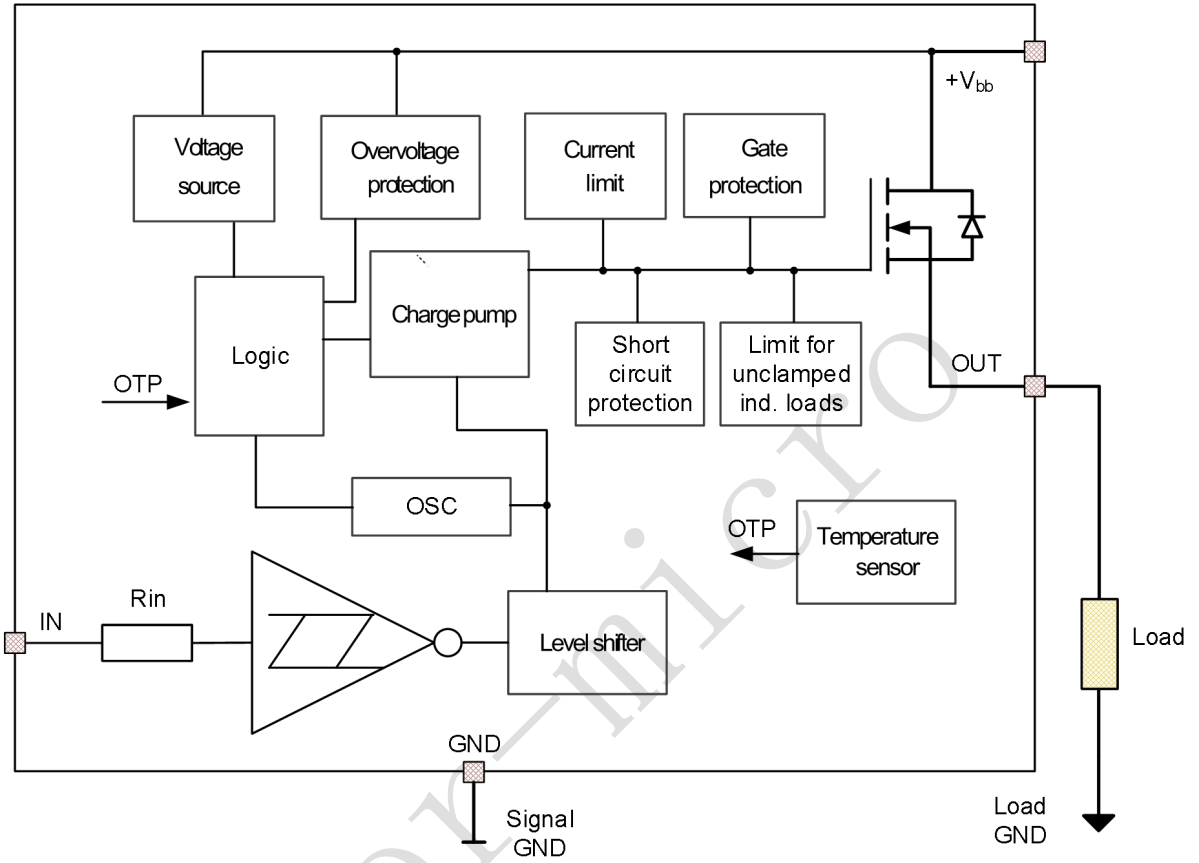

8. Absolute Maximum Ratings¹⁾

(Maximum Ratings at $T_j=25\text{ }^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Values	Unit	Note or Test Condition
Supply voltage	V_{bb}	45	V	
Load dump protection	$V_{\text{Load dump}}$	83	V	$V_{\text{LoadDump}}=V_A+V_s$, $R_i=2\Omega$, $t_d=400\text{ms}$, $V_{\text{IN}}=\text{low or high}$, $V_A=13.5\text{V}$, $R_L=47\Omega$
Current through input pin (DC)	I_{IN}	-5 to 5	mA	
Reverse current through GND-pin	$-I_{\text{GND}}$	-0.5	A	
Power dissipation (DC)	P_{tot}	1.17	W	SOT223
Continuous input voltage	V_{IN}	-10... V_{bb}	V	
Operating temperature	T_j	-40 to 150	$^\circ\text{C}$	
Ambient temperature	T_a	-40 to 125	$^\circ\text{C}$	
Storage temperature	T_{stg}	-55 to 150	$^\circ\text{C}$	
Thermal resistance @ 6 cm ² cooling area	$R_{\text{TH(JA)}}$	89.4	W	SOT223

Notes:

1. Stresses above the ones listed here may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

9. Electrical Characteristics

($T_J = -40^\circ\text{C}$ to $+150^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Test Condition	Values			Unit
			Min	Typ	Max	
R_{on}	On-state resistance	$V_{bb}=24\text{V}, V_{IN}=5\text{V}, I_{OUT}=0.5\text{A}, T_J=25^\circ\text{C}$	-	150	200	m Ω
		$V_{bb}=24\text{V}, V_{IN}=5\text{V}, I_{OUT}=0.5\text{A}, T_J=150^\circ\text{C}$	-	270	320	
$I_{L(nom)}$	Nominal load current	$V_{bb}=24\text{V}, V_{IN}=5\text{V}$	0.7	-	-	A
t_{on}	Turn-ON time	V_{IN} Turn-ON time to $V_{OUT} = 90\%V_{bb}$, $R_L=47\Omega, V_{bb}=15\text{V}$	-	57	100	μs
t_{off}	Turn-OFF time	V_{IN} Turn-OFF time to $V_{OUT} = 10\%V_{bb}$, $R_L=47\Omega, V_{bb}=15\text{V}$	-	55	150	μs
dV/dt_{on}	Turn-ON Slew rate	V_{OUT} From $10\%V_{bb}$ to $30\%V_{bb}$, $R_L=47\Omega, V_{bb}=15\text{V}$	-	0.9	2	V/ μs
$-dV/dt_{off}$	Turn-OFF Slew rate	V_{OUT} From $70\%V_{bb}$ to $40\%V_{bb}$, $R_L=47\Omega, V_{bb}=15\text{V}$	0.7	-	-	V/ μs
$V_{bb(on)}$	Operating voltage	$V_{IN}=5\text{V}, R_L=100\Omega$	6.0	-	45	V
$V_{bb(under)}$	Under voltage shutdown	$V_{IN}=5\text{V}, R_L=100\Omega$	4.5	-	5.5	V
$V_{bb(urst)}$	Under voltage restart	$V_{IN}=5\text{V}, R_L=100\Omega$	-	-	5.8	V
$\Delta V_{bb(under)}$	Under voltage hysteresis		-	-	0.5	V
$I_{bb(off)}$	Standby current	$V_{IN}=0, V_{bb}=30\text{V}, T_J \leq 25^\circ\text{C}$	-	11	25	μA
I_{GND}	Operating current	$V_{bb}=30\text{V}, V_{IN}=5\text{V}, V_{OUT}$ floating	-	-	1.6	mA
$I_{L(off)}$	Leakage output current	$V_{bb}=15\text{V}, V_{IN}=0\text{V}$	-	-	10	μA
$I_{L(SCP)}$	Initial peak short circuit current limit	$V_{bb}=30\text{V}, V_{IN}=5\text{V}, T_J=25^\circ\text{C}$	0.7	1.2	2.4	A
$V_{ON(CL)}$	Output clamp (inductive load switch off)	$V_{bb}=30\text{V}, V_{IN}=5\text{V}, f=20\text{Hz}, D=10\%$, $R_L=1\text{H}$	62	68	-	V
T_{jt}	Thermal overload trip temperature	$V_{bb}=12\text{V}, V_{IN}=5\text{V}, R_L=18\Omega$	135	-	-	$^\circ\text{C}$
ΔT_{jt}	Thermal hysteresis		-	10	-	$^\circ\text{C}$
$V_{bb(AZ)}$	Over voltage protection	$V_{IN}=5\text{V}, R_{GND}=330\Omega$	47	53	-	V
$V_{IN(T+)}$	Input turn-on threshold voltage		-	2.5	3	V
$V_{IN(T-)}$	Input turn-off threshold voltage		1.7	2.3	-	V
$V_{IN(T)}$	Input threshold hysteresis		-	0.2	1.0	V
$I_{IN(on)}$	ON state input current	$V_{bb}=15\text{V}, R_L=47\Omega, V_{IN}=3\text{V}$	10	-	110	μA
$I_{IN(off)}$	OFF state input current	$V_{bb}=15\text{V}, R_L=47\Omega, V_{IN}=1.7\text{V}$	10	-	110	μA

$t_{d(V_{bbon})}$	Input delay time at switch on V_{bb}	$V_{bb}=15V, V_{IN}=5V, R_L=47\Omega$	150	230	-	us
$-V_{ON}$	Drain-source diode voltage	$V_{bb}=24V, T_j=25^\circ C$	-	-	1.2	V

10. Timing diagrams

Figure 1: V_{bb} turn on

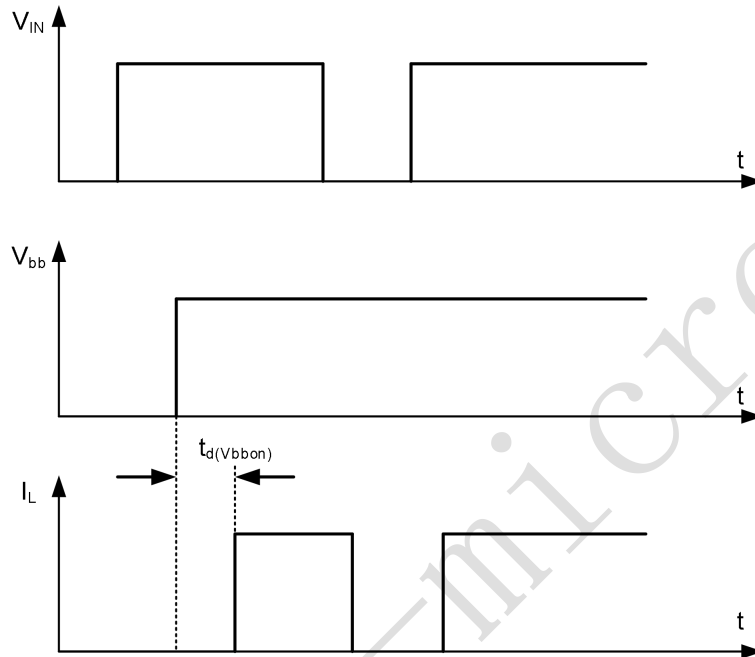


Figure 2a: Switching a resistive load, turn-on/off time and slew rate definition

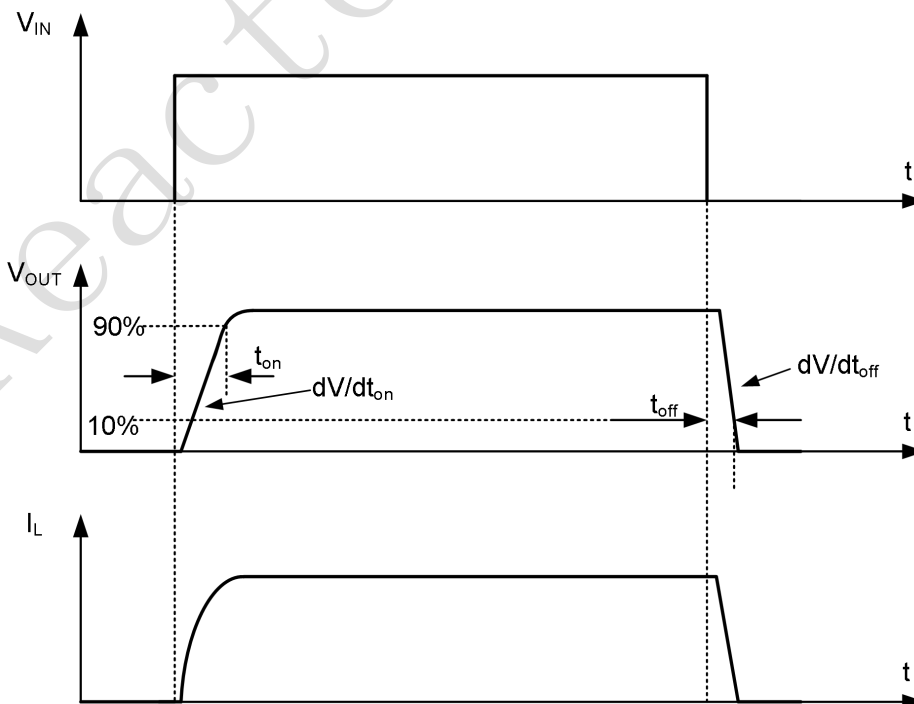


Figure 2b: Switching a lamp

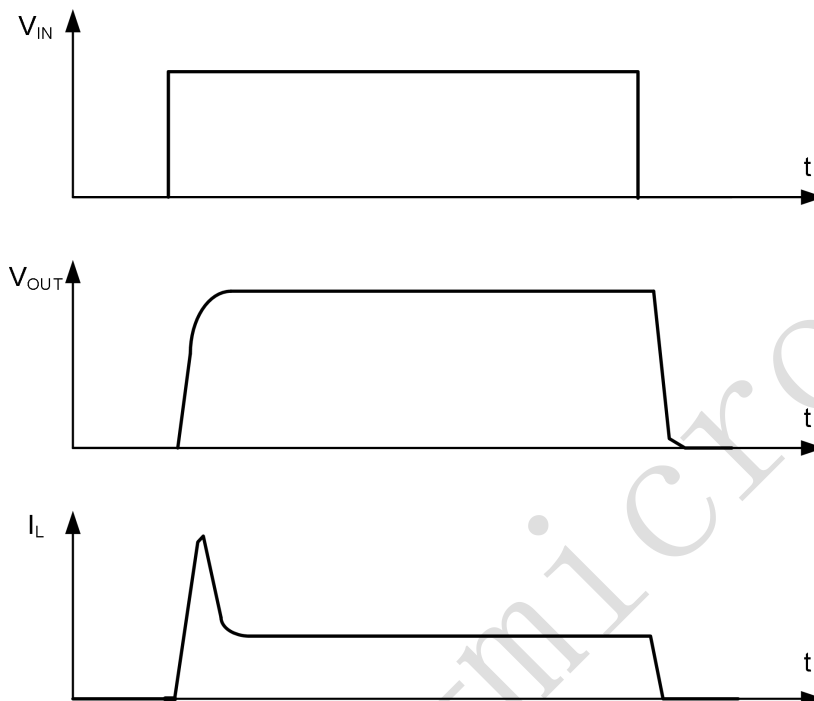


Figure 2c: Switching an inductive load

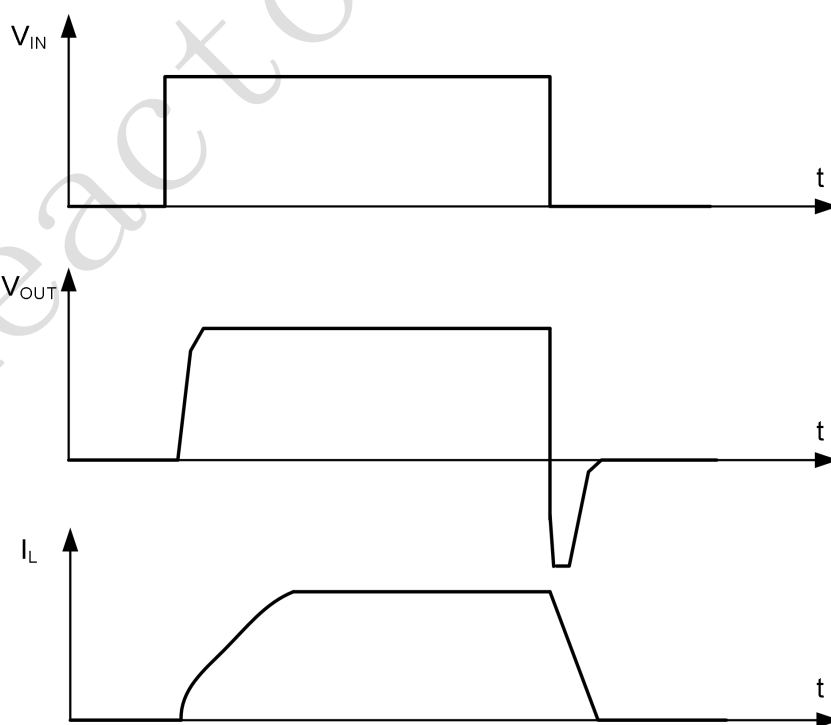


Figure 3a: Turn on into short circuit, shut down by overtemperature, restart by cooling

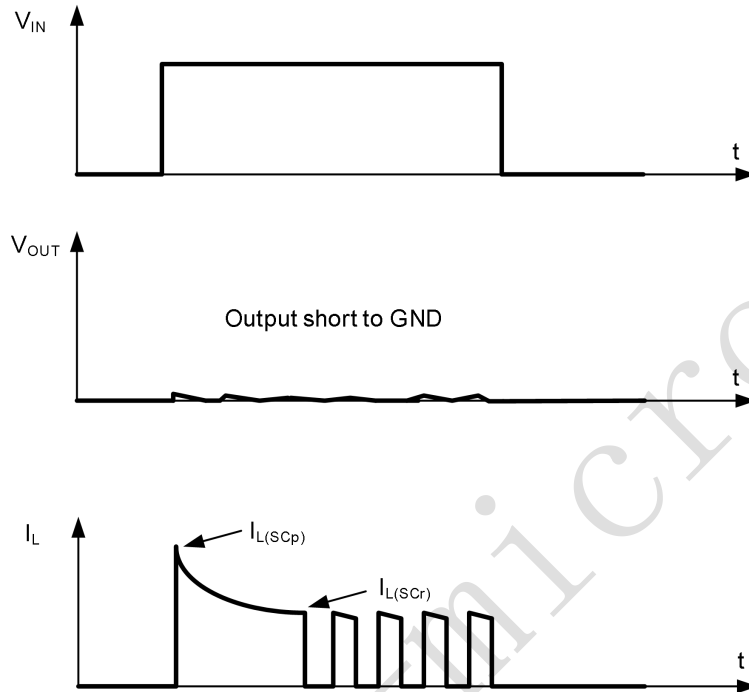


Figure3b: Short circuit in on-state shut down by overtemperature, restart by cooling

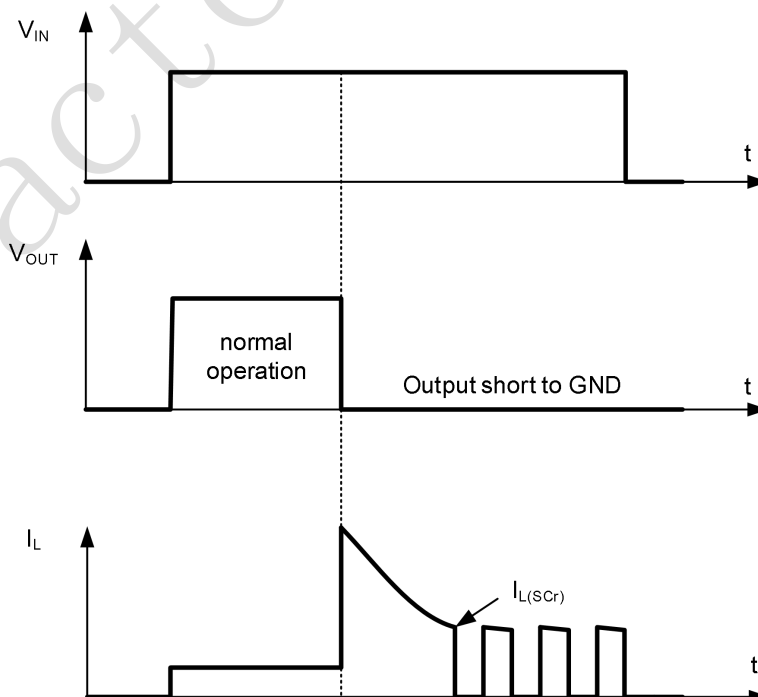


Figure4:Overtemperature: Reset if $T_j < T_{jt}$



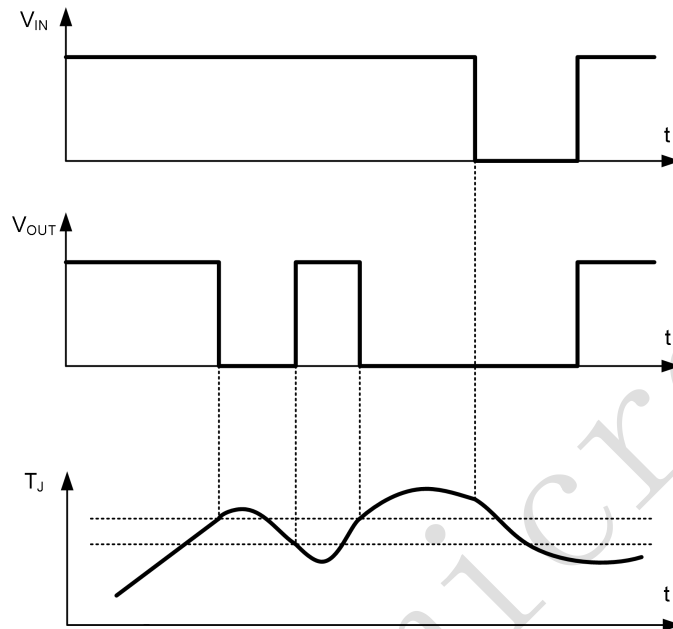


Figure5: Undervoltage shutdown and restart

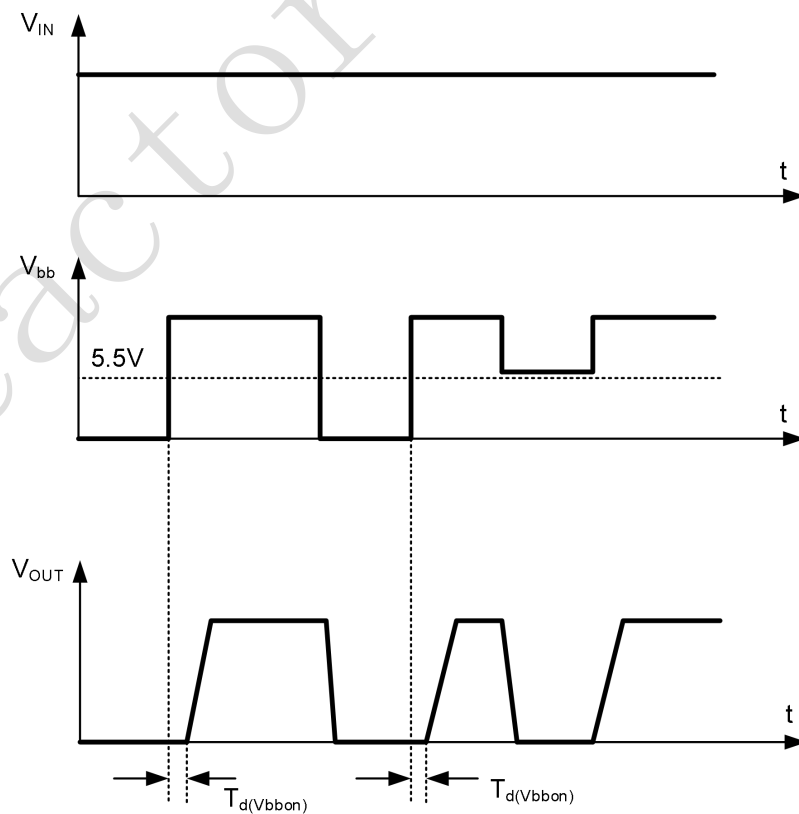


11. General Product Characteristics


11.1 Standby Current

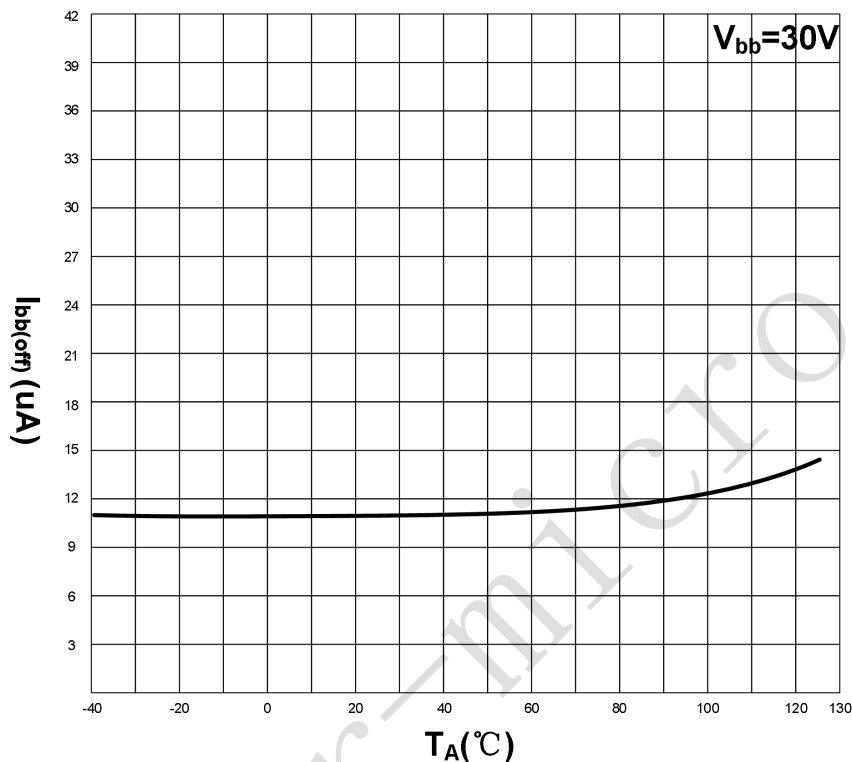


11.2 Operating current

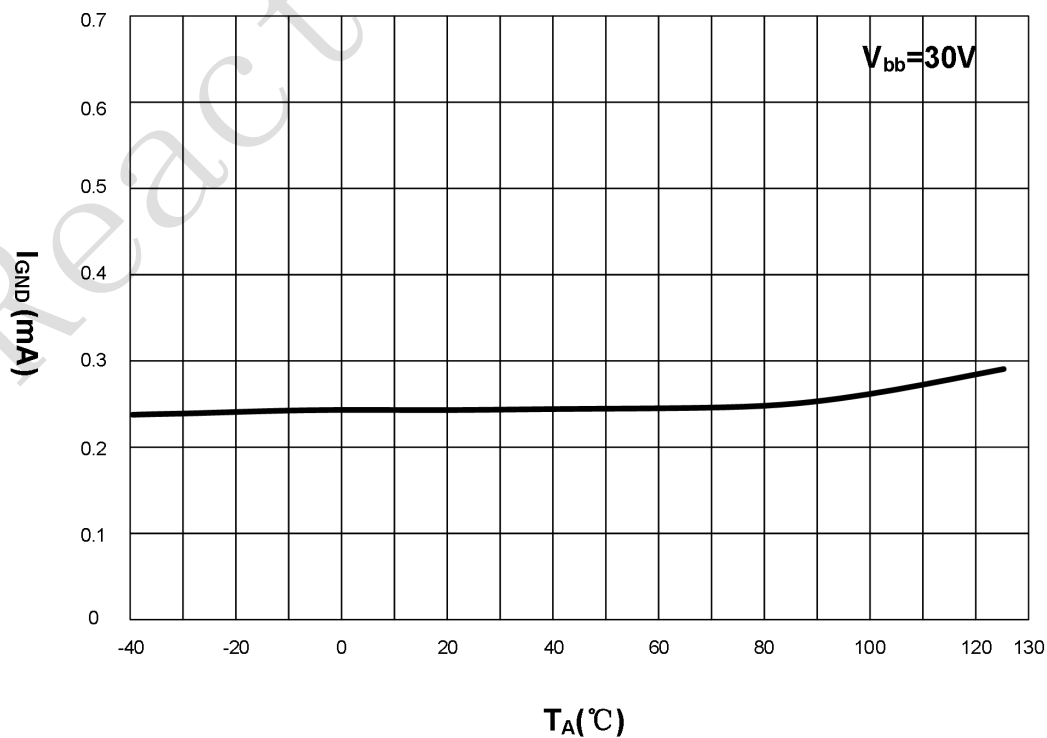


11.3 Leakage output current

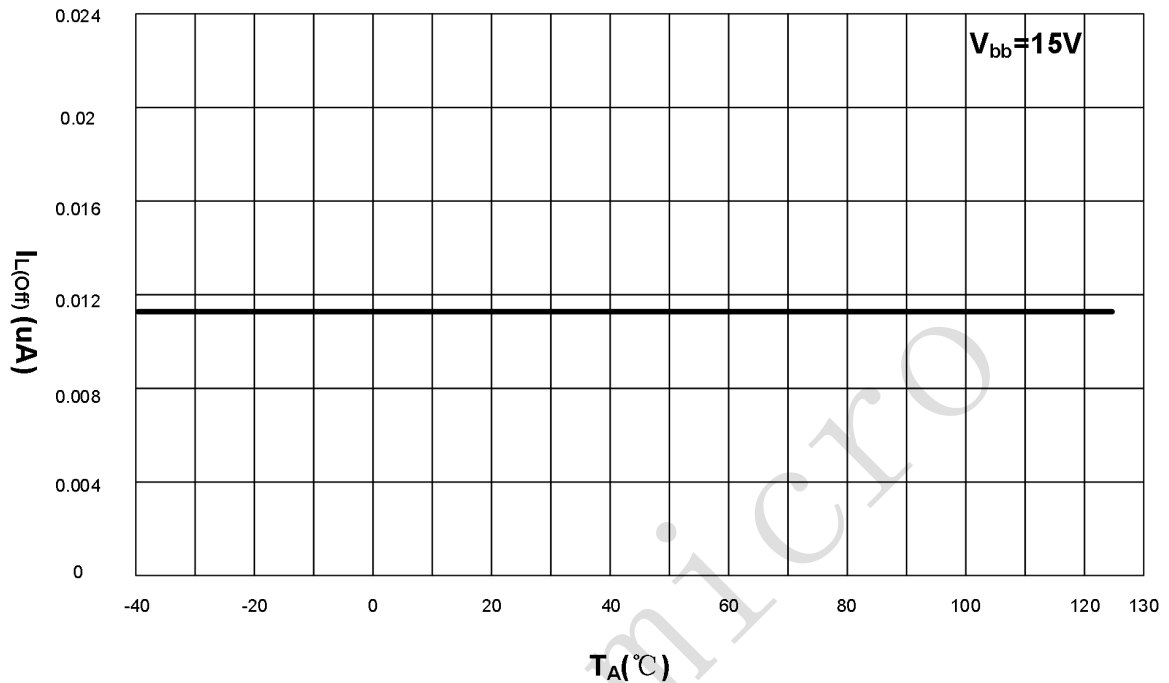

11.4 Drain-source diode voltage

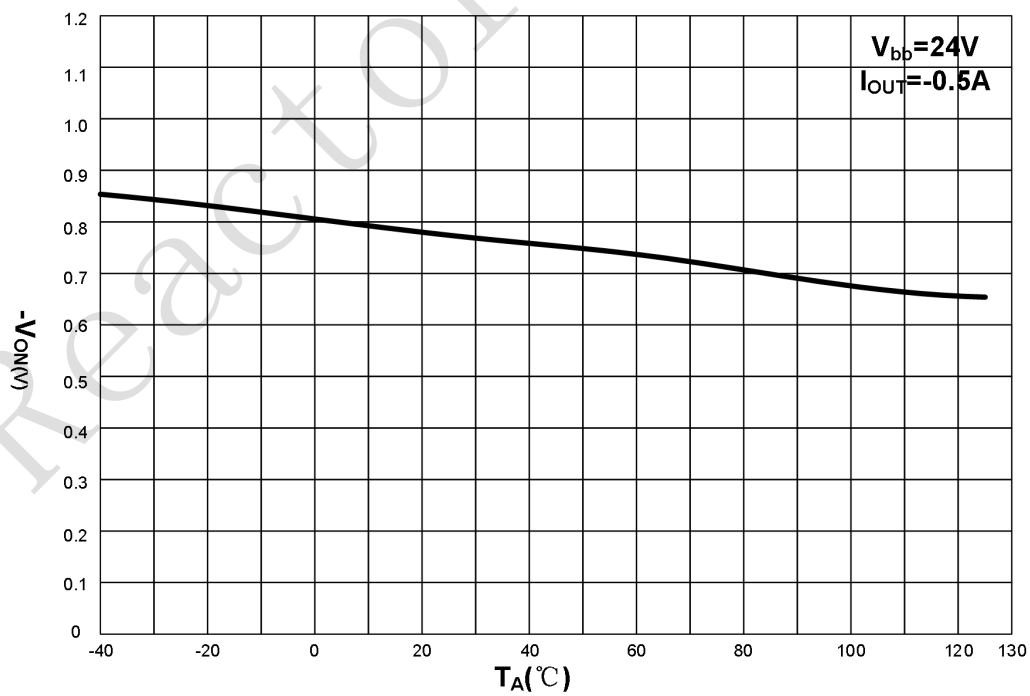


11.5 Typical ON-State Resistance

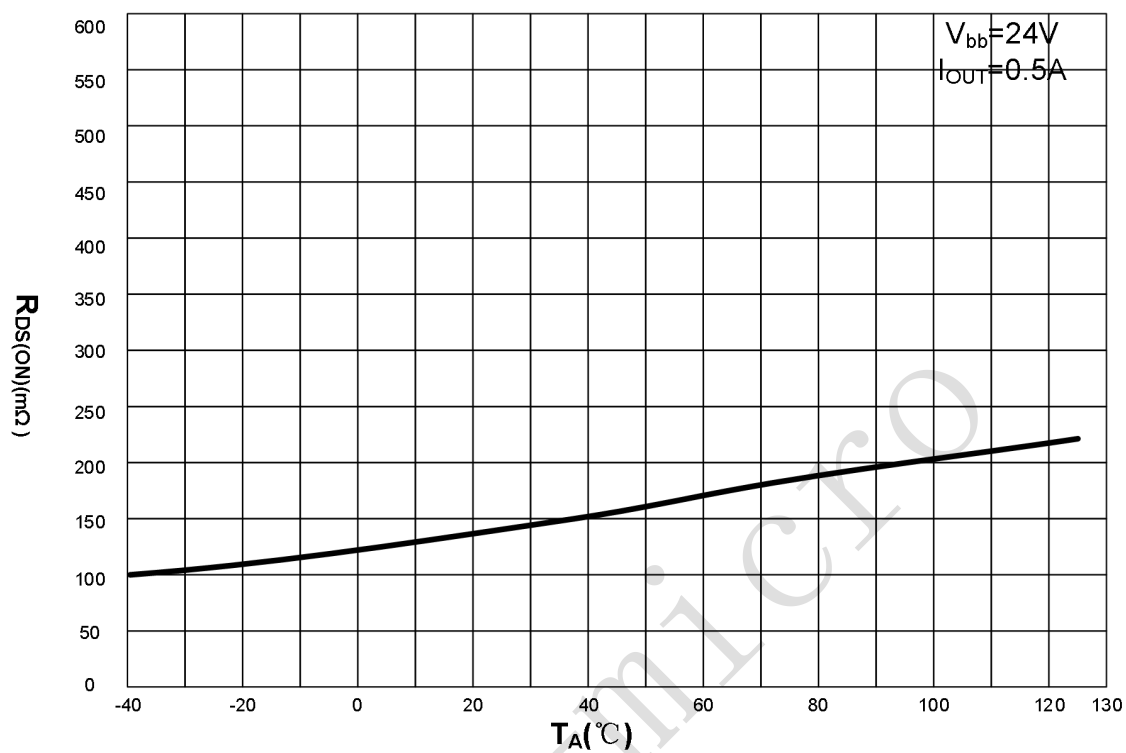


12.Functions

12.1 Terms

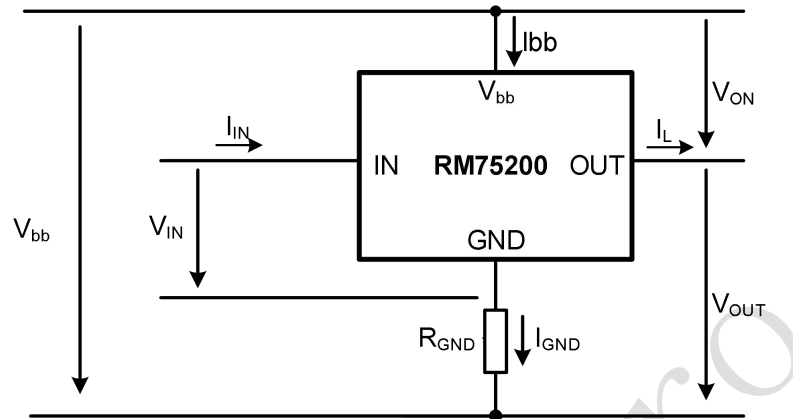


12.2 Input circuit (ESD protection)

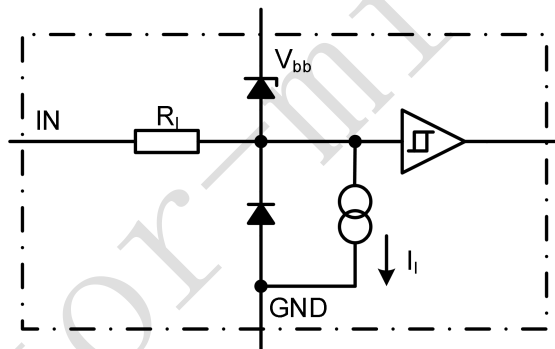


The use of ESD zener diodes as voltage clamp at DC conditions is not recommended

12.3 Reverse battery protection

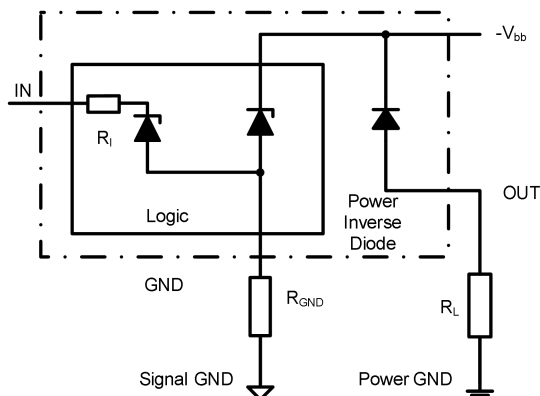


$R_{GND}=330\Omega$, $R_I=3k\Omega$ typ. Temperature protection is not active during inverse current.

12.4 Inductive and overvoltage output clamp

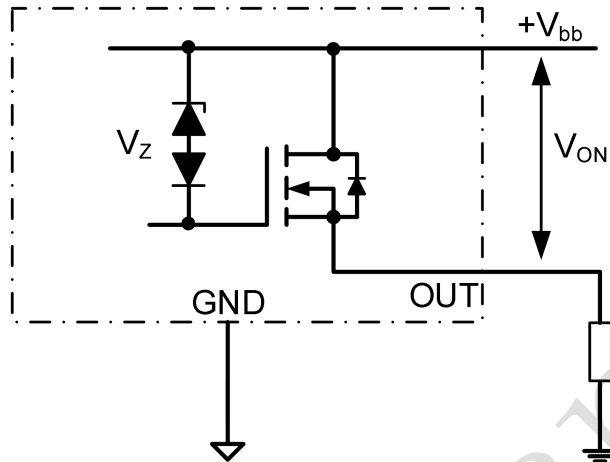

V_{ON} clamped to 62 V min.


12.5 Over voltage protection of logic part

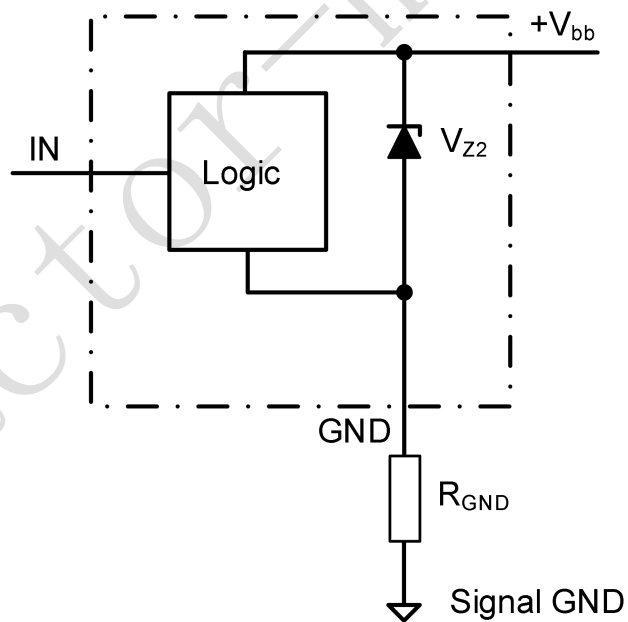

$V_{Z2}=V_{bb(AZ)}=47V$ min., $R_I=3$ k Ω typ., $R_{GND}=330\Omega$

13.Application Information

Note: The following information is given as a hint for the implementation of the device only and shall not be regarded as a description or warranty of a certain functionality, condition or quality of the device.

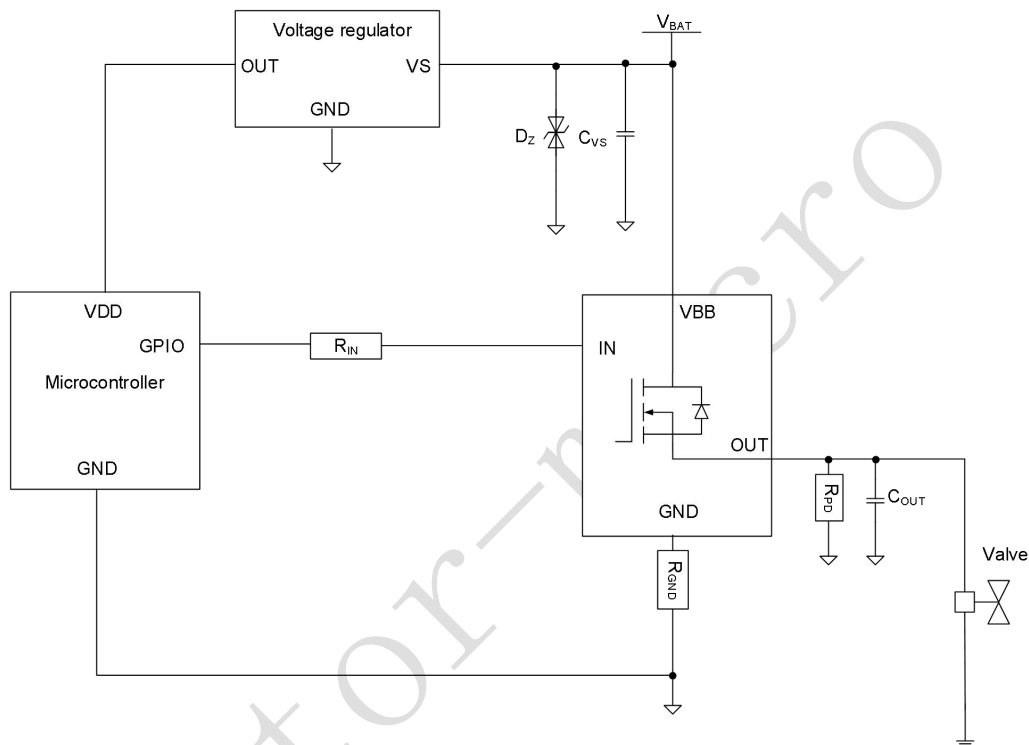


Note: This is a very simplified example of an application circuit. The function must be verified in the real application.

Bill of Material

Reference	Value	Reference	Value
R _{IN}	10kΩ	D _Z	58V Zener diode
R _{GND}	330Ω	C _{VS}	100nF
R _{PD}	47kΩ	C _{OUT}	10nF

14.Package


SOT-223

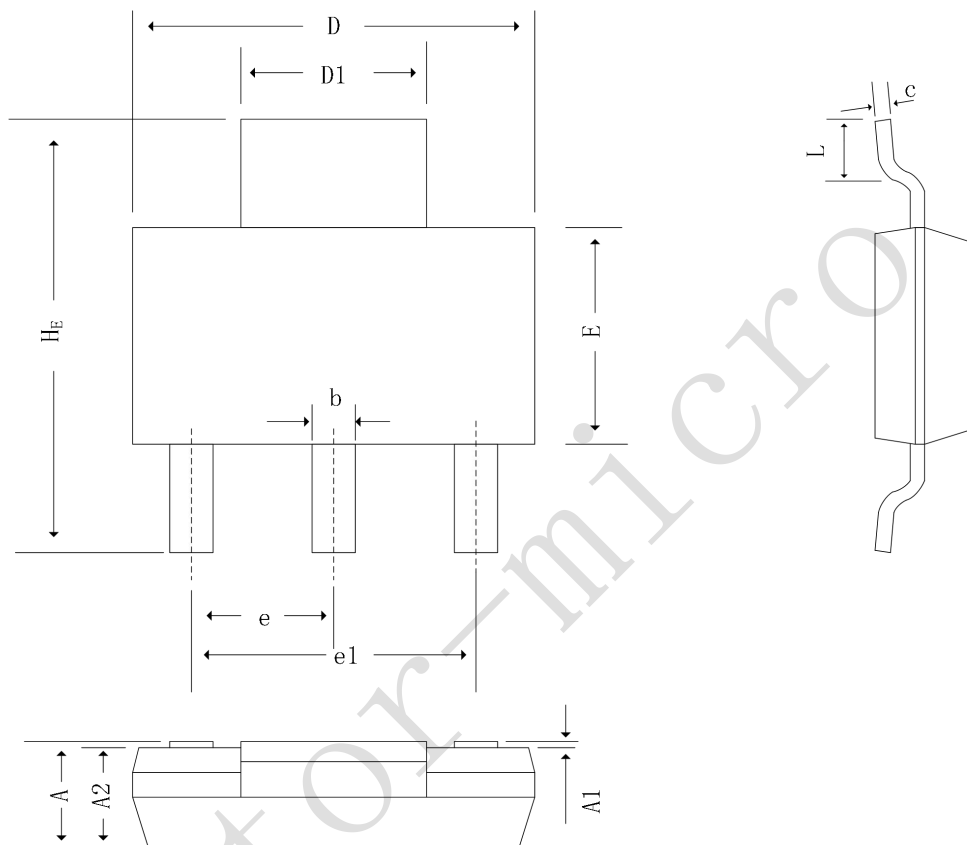

Unit :mm

Symbol	MIN	NOM	MAX
A	/	/	1.80
A1	0.02	/	0.10
A2	1.50	1.60	1.70
b	0.66	0.71	0.84
c	0.23	0.30	0.35
D	6.30	6.50	6.70
D1	2.90	3.00	3.10
E	3.30	3.50	3.70
HE	6.70	7.00	7.30
e	2.300(BSC)		
e1	4.600(BSC)		
L	0.750	/	/


ESOP8L

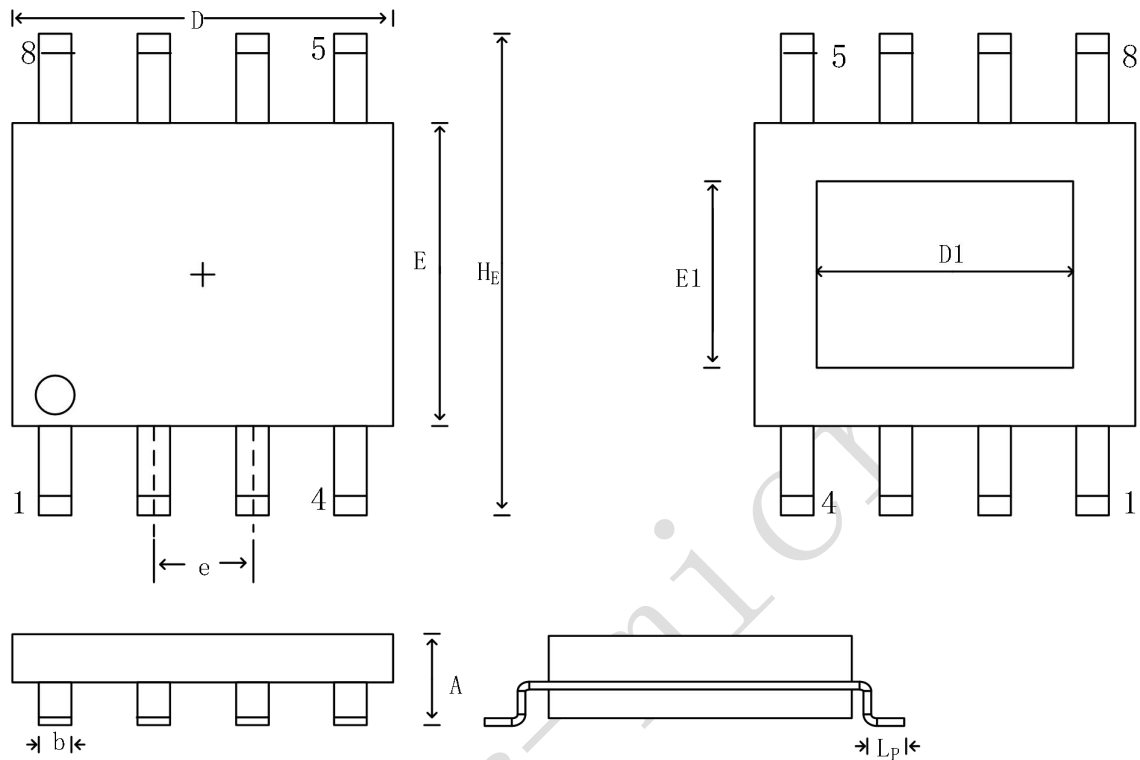


Unit :mm

Symbol	MIN	NOM	MAX
D	4.70	4.90	5.10
E	3.70	3.90	4.10
H_E	6.00	6.20	6.40
e	1.27BSC		
D_1	3.10	3.30	3.50
E_1	2.20	2.40	2.60
A	1.35	1.55	1.75
b	0.35	0.42	0.49
L_P	0.40	0.825	1.25

15.Recommended Soldering Footprint

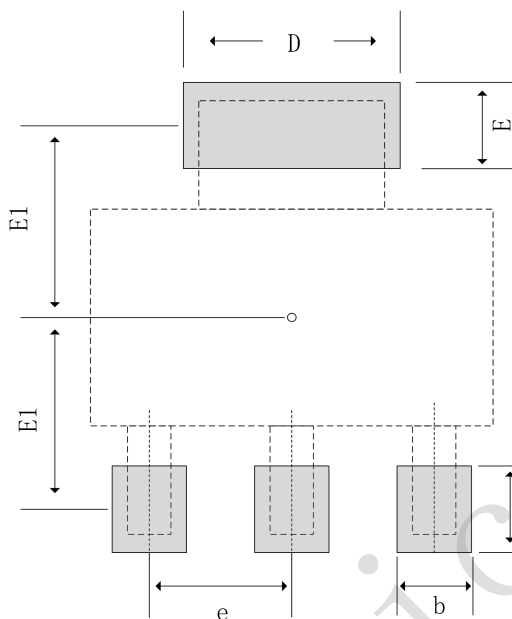

Symbol	NOM	Symbol	NOM
D1	3.0	E	1.4
E1	3.1	L	1.4
b	0.71	e	2.3

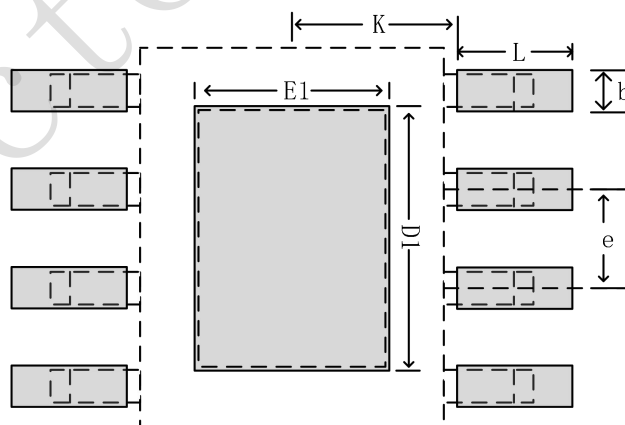

Symbol	NOM	Symbol	NOM
e	1.27	D1	3.30
b	0.42	E1	2.7
L	1.8	K	2.1

16.Revision History

Version	Change Description	Date
1.0	Initial Version	2024/08/13
1.1	1) Revised certain parameter names and test conditions in the Electrical Characteristics table. 2) Revised Application Information. 3) Added certain parameter in the Absolute Maximum Ratings 4) Revised and Added certain parameter in the Electrical Characteristics table.	2025/10/09
NOTE*:Datasheets with alphabetic version numbers (e.g., REV.A, REV.B, REV.C) are designated for the sample phase,whereas those with numeric version numbers (e.g., V1.0, V1.1, V1.2) are intended for the mass production phase.		