

5-25W, AC/DC converter



### FEATURES

- Wide input voltage range : 85~264VAC/120~370VDC
- Low temperature operating range of military grade: -40~70°C
- Conversion efficiency up to 87%
- Short circuit , over-current, over- voltage protection
- Meets IEC60950, EN60950, UL60950 standards
- Three years warranty



*LB(05-25)-10BxxLT series — is a compact size power converter offered by Mornsun. It features universal input voltage, taking both DC and AC input voltage, low power consumption, high efficiency, high reliability, safer isolation. It offers good EMC performance, meets IEC/EN61000-4, CISPR22/EN55022, UL60950, EN60950 standards, and is widely used in industrial, office and civil applications. For harsh EMC environment, this series of product must use the referred application circuit.*

### Selection Guide

Certification	Part No.	Output Power	Nominal Output Voltage and Current (Vo/Io)	Efficiency (230VAC, %/Typ.)	Max. Capacitive Load(μF)
UL/CE (pending)	LB05-10B03LT	4W	3.3V/1250mA	70	4000
	LB05-10B05LT	5W	5V/1000mA	75	4000
	LB05-10B09LT		9V/550mA	77	1800
	LB05-10B12LT		12V/420mA	79	1800
	LB05-10B15LT		15V/330mA	80	1500
	LB05-10B24LT		24V/230mA	82	330
	LB10-10B03LT		6.6W	3.3V/2000mA	70
	LB10-10B05LT	10W	5V/2000mA	76	9400
	LB10-10B09LT		9V/1100mA	78	3600
	LB10-10B12LT		12V/900mA	80	2400
	LB10-10B15LT		15V/700mA	81	1200
	LB10-10B24LT		24V/450mA	82	370
	LB15-10B03LT		9.9W	3.3V/3000mA	73
	LB15-10B05LT	14W	5V/2800mA	76	20000
	LB15-10B09LT	15W	9V/1600mA	78	6000
	LB15-10B12LT		12V/1250mA	80	3000
	LB15-10B15LT		15V/1000mA	80	3000
	LB15-10B24LT		24V/625mA	84	900
	LB15-10B48LT		48V/320mA	85	370
	LB20-10B03LT		13.5W	3.3V/4100mA	74
	LB20-10B05LT	17.5W	5V/3500mA	78	12000
	LB20-10B09LT	20W	9V/2100mA	80	7200
	LB20-10B12LT		12V/1600mA	82	5400
	LB20-10B15LT		15V/1300mA	83	2700
	LB20-10B24LT		24V/850mA	85	1800
	LB25-10B03LT		13.5W	3.3V/4100mA	74
	LB25-10B05LT	20.5W	5V/4100mA	79	12000
	LB25-10B09LT	25W	9V/2500mA	81	5600
LB25-10B12LT	12V/2100mA		83	5400	

### Selection Guide

Certification	Part No.	Output Power	Nominal Output Voltage and Current (Vo/Io)	Efficiency (230VAC, %/Typ.)	Max. Capacitive Load(μF)
UL/CE (pending)	LB25-10B15LT	25W	15V/1600mA	84	2400
	LB25-10B24LT		24V/1100mA	85	1400
	LB25-10B48LT		48V/500mA	87	800

### Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit	
Input Voltage Range	AC input	85	--	264	VAC	
	DC input	120	--	370	VDC	
Input frequency		47	--	63	Hz	
Input current	LB05 models	115VAC	--	--	0.125	A
	LB10 models		--	--	0.26	
	LB15 models		--	--	0.37	
	LB20/LB25 models		--	--	0.6	
	LB05 models	230VAC	--	--	0.08	
	LB10 models		--	--	0.16	
	LB15 models		--	--	0.22	
	LB20/LB25 models		--	--	0.34	
Inrush current	LB05/LB10/LB15 models	115VAC	--	10	--	
	LB20/ LB25 models	115VAC	--	16	--	
	LB05/LB10/LB15 models	230VAC	--	20	--	
	LB20/ LB25 models	230VAC	--	30	--	
Leakage current		0.1mA RMS typ. 230VAC/50Hz				
Recommended External Input Fuse	LB05 models	1A/250V, slow fusing				
	LB10/ LB15 models	2A/250V, slow fusing				
	LB20/ LB25 models	3.15A/250V, slow fusing				

### Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy	Main circuit	--	±2	--	%
Line Regulation	Full load	--	±0.5	--	
Load Regulation	10%-100% load	--	±1	--	
Output Ripple & Noise*	20MHz bandwidth (peak-peak value)	--	50	100	mV
Temperature Drift Coefficient	Main circuit	--	±0.02	--	%/°C
Short Circuit Protection		Continuous, self-recovery			
Over-current Protection		≥110%Io self-recovery			
Over-voltage Protection	3.3/5VDC	≤7.5VDC			
	9VDC	≤12VDC			
	12/15VDC	≤20VDC			
	24VDC	≤30VDC			
	48VDC	≤60VDC			
Min. Load		0	--	--	%
Hold-up Time	115VAC input	--	15	--	ms
	230VAC input	--	80	--	

Note: \*Parallel line test method is adopted to test the ripple and noise, please see *AC-DC Converter Application Notes* for specific operation methods.

### General Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Isolation Voltage	Input-output	Test time: 1min	3000	--	--	VAC
Operating Temperature			-40	--	+70	°C
Storage Temperature			-40	--	+105	
Storage Humidity			--	--	95	%RH
Welding Temperature	Wave-soldering		260±5°C; time:5~10s			
	Manual-welding		360±10°C; time:3~5s			
Switching Frequency	LB05 models		--	66	132	kHz
	LB10 models		--	100	--	
	LB15/LB20/LB25 models		--	65	--	
Power Derating	-40°C to -10°C		2	--	--	% / °C
	50°C to +70°C (LB25-10BxxLT series)		3	--	--	
	55°C to +70°C (Others)		4	--	--	
Safety Standard	IEC60950/EN60950/UL60950					
Safety-regulated Certification	EN60950/UL60950 (pending)					
Safety Class	LB15-10BxxLT		CLASS II			
	Others		CLASS I			
Hot Plug	Unavailable					
MTBF	MIL-HDBK-217F@25°C > 300,000 h					


### Physical Specifications

Casing Material	Black flame-retardant and heat-resistant plastic (UL94-V0)
Package Dimensions	Refer to the Dimensions
Weight	Refer to the Dimensions
Cooling method	Free air convection


### EMC Specifications

EMI	Conducted Disturbance	CISPR22/EN55022, CLASS B		
	Radiated Emission	CISPR22/EN55022, CLASS B		
EMS	Electrostatic Discharge	IEC/EN61000-4-2	±6KV/±8KV	Perf. Criteria B
	Radiation Immunity	IEC/EN61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN61000-4-4	±2KV	perf. Criteria B
		IEC/EN61000-4-4	±4KV (See Fig. 2 for recommended circuit)	perf. Criteria B
	Surge Immunity	IEC/EN61000-4-5	±1KV/±2KV	perf. Criteria B
		IEC/EN61000-4-5	±2KV/±4KV (See Fig. 2 for recommended circuit)	perf. Criteria B
	Conducted Disturbance immunity	IEC/EN61000-4-6	10 Vr.m.s	perf. Criteria A
Immunity for Power frequency magnetic field	IEC/EN61000-4-8	10A/m	perf. Criteria A	
Immunities of voltage dip, drop and short interruption	IEC/EN61000-4-11	0%-70%	perf. Criteria B	



### Product Characteristic Curve

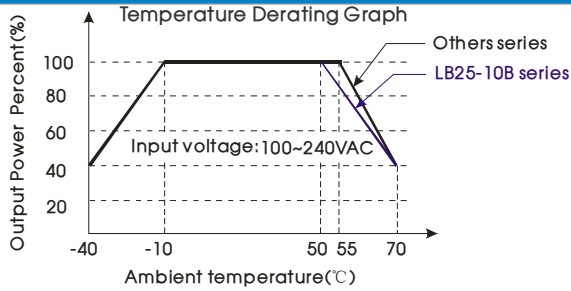

Note: When input 85~100VAC/240~264VAC, it need to be voltage derated on basis of temperature derating.

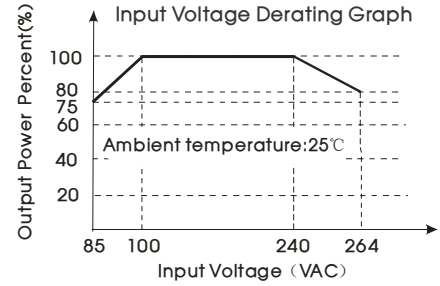

Note: When input DC, VDC=1.414VAC-20.

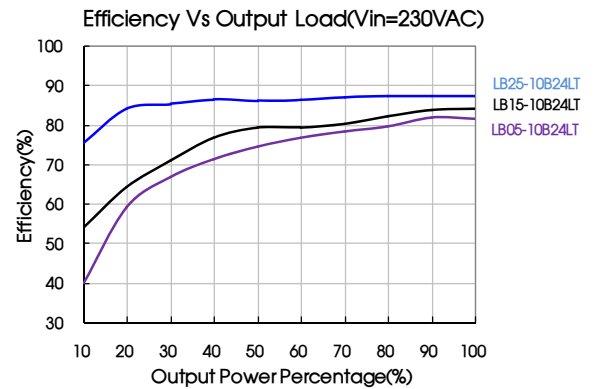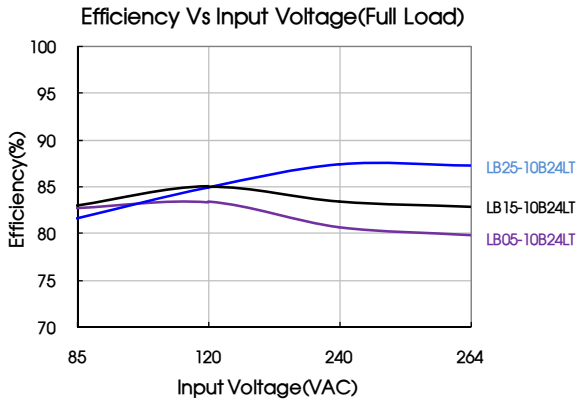

### Design Reference

#### 1. Typical application circuit

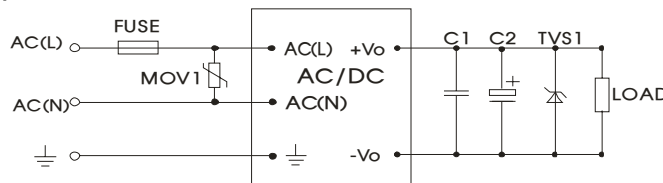


Fig. 1: Typical application circuit

Model	C1(uF)	C2(uF)	TVS1	Model	C1(uF)	C2(uF)	TVS1
LB05-10B03LT	1	330	SMBJ7.0A	LB15-10B15LT	1	220	SMBJ20A
LB05-10B05LT	1	330	SMBJ7.0A	LB15-10B24LT	1	68	SMBJ30A
LB05-10B09LT	1	120	SMBJ12A	LB15-10B48LT	1	33	SMBJ64A
LB05-10B12LT	1	120	SMBJ20A	LB20-10B03LT	1	330	SMBJ7.0A
LB05-10B15LT	1	68	SMBJ20A	LB20-10B05LT	1	330	SMBJ7.0A
LB05-10B24LT	1	68	SMBJ30A	LB20-10B09LT	1	220	SMBJ12A
LB10-10B03LT	1	470	SMBJ7.0A	LB20-10B12LT	1	220	SMBJ20A
LB10-10B05LT	1	330	SMBJ7.0A	LB20-10B15LT	1	220	SMBJ20A
LB10-10B09LT	1	120	SMBJ12A	LB20-10B24LT	1	220	SMBJ30A
LB10-10B12LT	1	120	SMBJ20A	LB25-10B03LT	1	330	SMBJ7.0A
LB10-10B15LT	1	120	SMBJ20A	LB25-10B05LT	1	330	SMBJ7.0A
LB10-10B24LT	1	68	SMBJ30A	LB25-10B09LT	1	330	SMBJ12A
LB15-10B03LT	1	680	SMBJ7.0A	LB25-10B12LT	1	330	SMBJ20A
LB15-10B05LT	1	680	SMBJ7.0A	LB25-10B15LT	1	330	SMBJ20A
LB15-10B09LT	1	470	SMBJ12A	LB25-10B24LT	1	120	SMBJ30A
LB15-10B12LT	1	220	SMBJ20A	LB25-10B48LT	1	68	SMBJ64A

Note:  
Output filtering capacitor C2 is electrolytic capacitor, it is recommended to apply electrolytic capacitor with high frequency and low resistance. For capacitance and current of capacitor please refer to manufacture's datasheet. Capacitance withstand voltage derating should be 80% or above. C1 is ceramic capacitor, advice use 1μF, which is used to filter high-frequency noise. TVS is a recommended component to protect post-circuits if converter fails.

2. EMC solution-recommended circuit

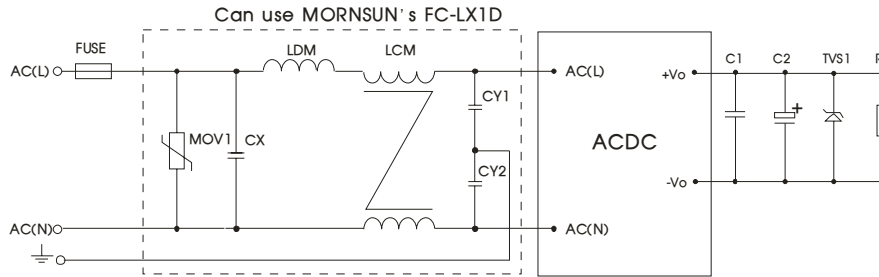


Fig. 2: EMC Recommended circuit with higher requirements


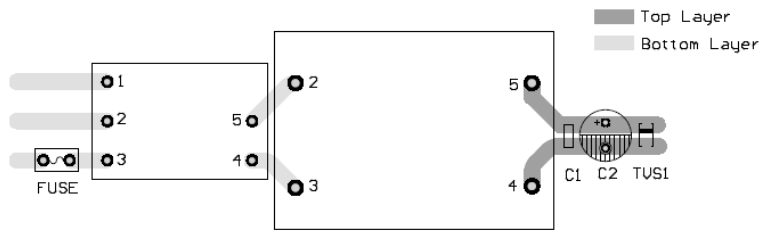


Fig.3: Recommended EMC circuit-PCB layout

Suggestions for safety regulation and wiring width: wire width ≥3mm, distance between wires ≥6mm, and distance between wire and ground ≥6mm

Element model	Recommended value	Element model	Recommended value	
MOV1	S14K350	FC-LX1D	2KV/4KV EMC filter	
CY1 , CY2	1000pF/400VAC	FUSE	LB05	1A/250V slow fusing, necessary
CX	0.1μF/275VAC		LB10/15	2A/250V slow fusing, necessary
LDM	5uH		LB20/25	3.15A/250V slow fusing, necessary
LCM	10mH, recommended to use MORNSUN's FL2D-Z5-103	--	--	--

3. Application of Trim and calculation of Trim resistance

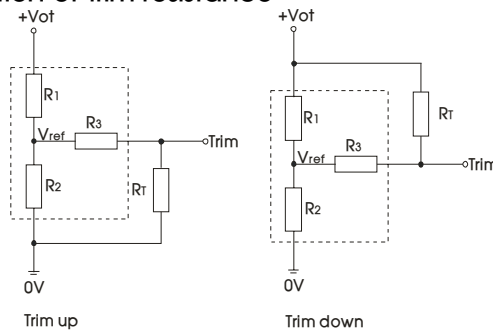

Applied circuits of Trim (Part in broken line is the interior of models)

Calculation formula of Trim resistance:


$$\begin{aligned} \text{up: } R_T &= \frac{aR_2}{R_2-a} - R_3 & a &= \frac{V_{ref}}{V_{ot}-V_{ref}} \cdot R_1 \\ \text{down: } R_T &= \frac{aR_1}{R_1-a} - R_3 & a &= \frac{V_{ot}-V_{ref}}{V_{ref}} \cdot R_2 \end{aligned}$$

R<sub>T</sub> is Trim resistance;  
a is a self-defined parameter, with no real meaning.

Vout	R1(K $\Omega$ )	R2(K $\Omega$ )	R3(K $\Omega$ )	Vref(V)	Vot(V)
3.3V	3.3	1.98	1	1.24	Output voltage after regulation, variation $\leq \pm 10\%$
5V	3.3	3.3	1	2.5	
9V	7.5	2.87	1	2.5	
12V	3.83	1	1	2.5	
15V	7.5	1.5	1	2.5	
24V	8.66	1	1	2.5	
48V	68	3.73	1	2.5	

4. For more information please find the application notes on [www.mornsun-power.com](http://www.mornsun-power.com)

## Dimensions and Recommended Layout

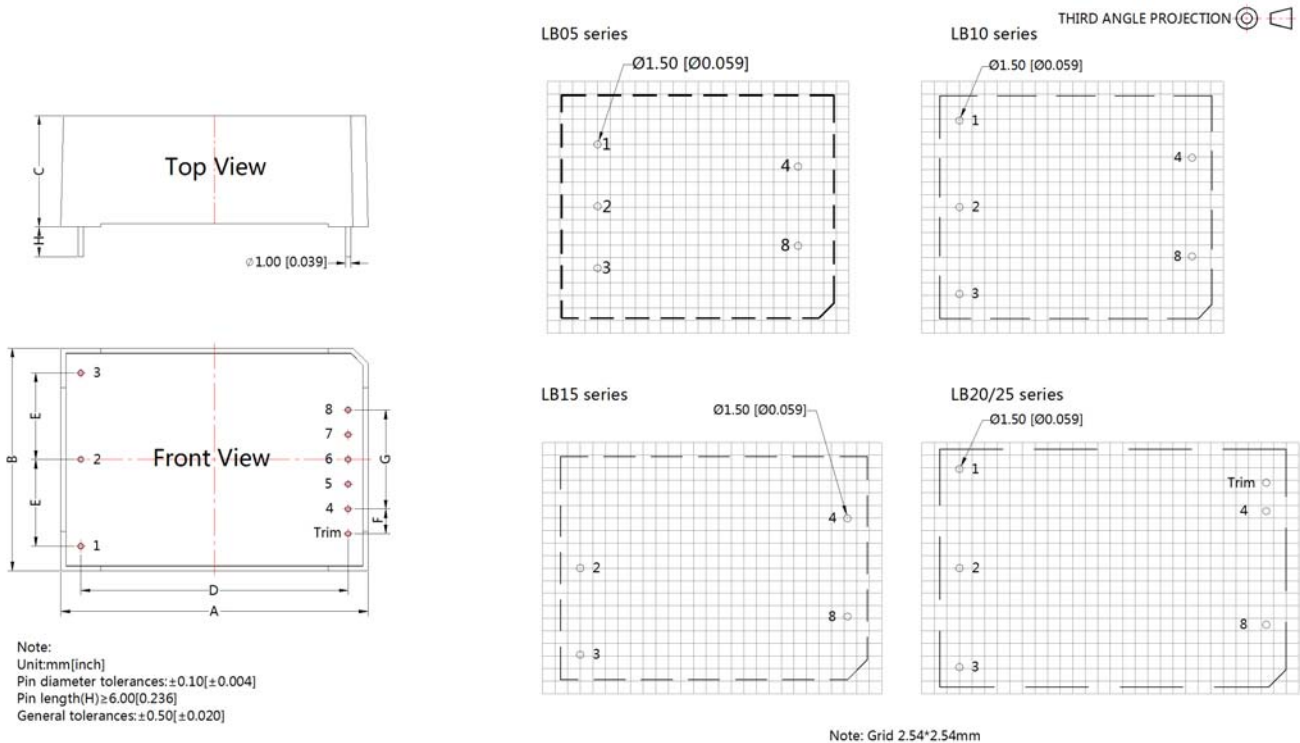

Dimensions (Unit: mm)					
NO.	LB05	LB10	LB15	LB20	LB25
A	55.00	55.00	62.00	70.00	70.00
B	45.00	45.00	45.00	48.00	48.00
C	21.00	21.00	22.50	23.50	23.50
D	40.50	47.00	54.00	62.00	62.00
E	12.50	17.50	17.50	20.00	20.00
F	--	--	--	5.75	5.75
G	16.00	20.00	20.00	23.00	23.00

Models Weight					
Weight (Typ.)	LB05	LB10	LB15	LB20	LB25
	70g	80g	85g	120g	120g

Pin Connection	
Pin	LBxx-10BxxLT
1	
2	AC(N)
3	AC(L)
4	-Vo
5	No Pin
6	No Pin
7	No Pin
8	+Vo
Trim	Trim**

There is no pin "1" on LB15-10BxxLT  
Trim\*\*: only for LB20/25-10BxxLT Series.

Note:

1. Packing Information please refer to 'Product Packing Information'. The Packing bag number of Horizontal package : 58220006;
2. Unless otherwise specified, data in this datasheet should be tested under the conditions of  $T_a=25^{\circ}\text{C}$ , humidity<75% when inputting nominal voltage and outputting rated load;
3. All index testing methods in this datasheet are based on our Company's corporate standards;
4. The performance indexes of the product models listed in this manual are as above, but some indexes of non-standard model products will exceed the above-mentioned requirements, and please directly contact our technician for specific information;
5. We can provide product customization service;
6. Specifications of this product are subject to changes without prior notice.

**Mornsun Guangzhou Science & Technology Co., Ltd.**

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Luogang District, Guangzhou, P. R. China  
Tel: 86-20-38601850-8801 Fax: 86-20-38601272 E-mail: info@mornsun.cn