
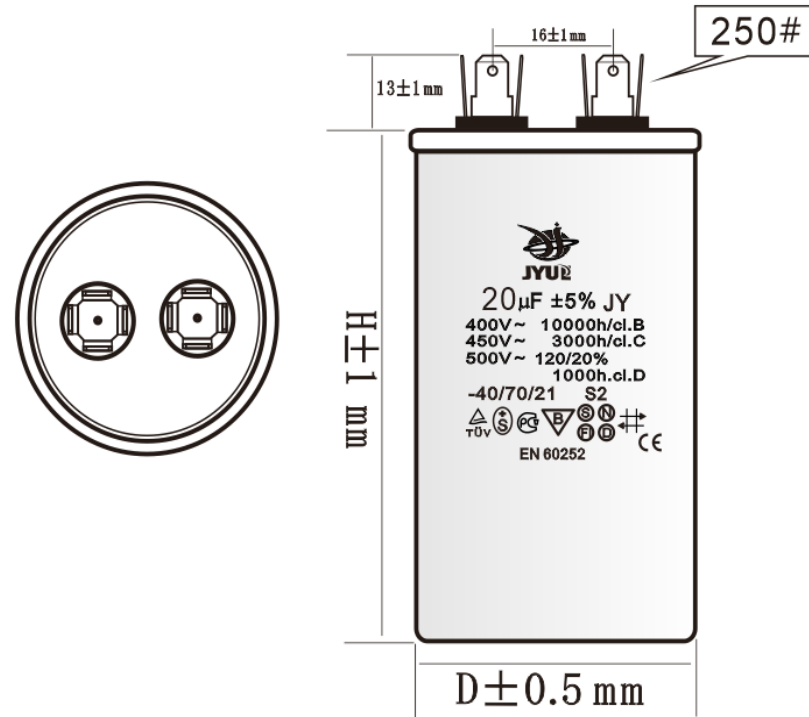
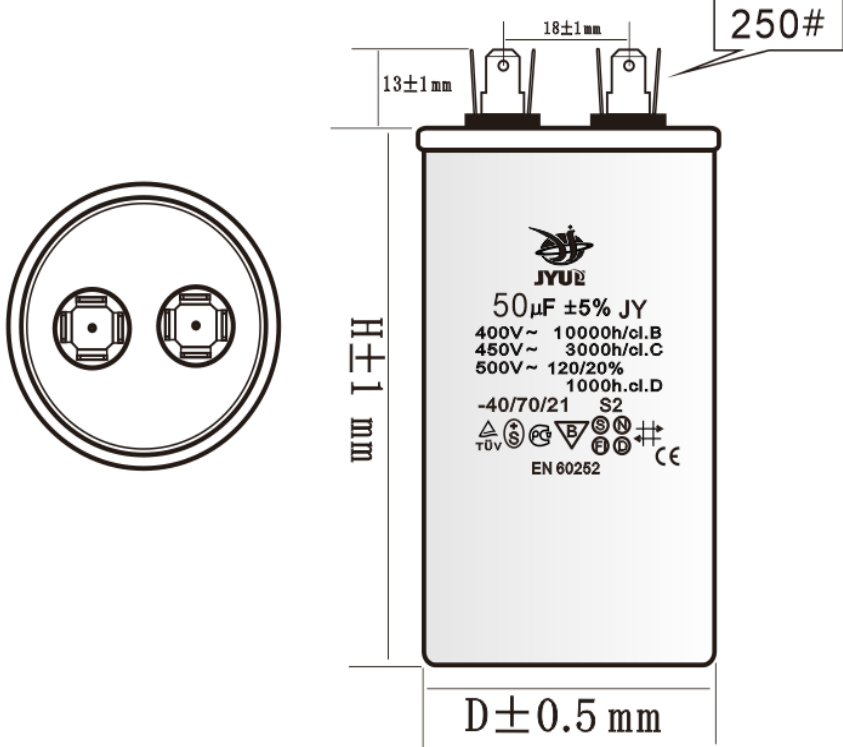


Customer ' s name					Customer recognizes:	
NO.	Specified voltage and frequency	Specified capacity and capacity deviation	Over all dimension	Remark		
1	450VAC 50/60Hz	10μF±5%	40×60	A1		
2	450VAC 50/60Hz	12.5μF±5%	40×60			
3	450VAC 50/60Hz	15μF±5%	40×75			
4	450VAC 50/60Hz	20μF±5%	40×75			
5	450VAC 50/60Hz	25μF±5%	45×75			
Carry out standard		GB/T3667.1-2016/IEC60252-1: 2013				
Operating temp range		(-40~+70℃)	Lifespan garden	C CLASS		
Withstanding standard		Between terminals	2.0Un			
		Terminals to case	2.5KVC/2S			
		safety class	S2			
Capacitance tolerance		±5%				
Loss angle tangent		≤ 0.0030 (1000 HZ)				
	Shape	See right picture				
	Condenser fuse	Have self-healing				
	Case	ALUMINIUM CASE			Drafts system:	
	Terminals	4+4 PINS			Name: CBB65 metallized polypropylene film capacitor.	
	Filling	Special wax			Approval	
					Wenling jiyang capacitor co.,LTD	

Customer ' s name					Customer recognizes:		
NO.	Specified voltage and frequency	Specified capacity and capacity deviation	Over all dimension	Remark			
1	450VAC 50/60Hz	30 $\mu$ F $\pm$ 5%	45 $\times$ 85	A1			
2	450VAC 50/60Hz	35 $\mu$ F $\pm$ 5%	45 $\times$ 85				
3	450VAC 50/60Hz	40 $\mu$ F $\pm$ 5%	50 $\times$ 85				
4	450VAC 50/60Hz	45 $\mu$ F $\pm$ 5%	50 $\times$ 85				
5	450VAC 50/60Hz	50 $\mu$ F $\pm$ 5%	50 $\times$ 100				
Carry out standard		GB/T3667.1-2016/IEC60252-1: 2013					
Operating temp range		(-40 $\sim$ +70 $^{\circ}$ C)	Lifespan garden	C CLASS			
Withstanding standard		Between terminals	2.0U <sub>N</sub>				
		Terminals to case	2.5KVC/2S				
		safety class	S2				
Capacitance tolerance		$\pm$ 5%					
Loss angle tangent		$\leq$ 0.0060 (1000 HZ)					
	Shape	See right picture					
	Condenser fuse	Have self-healing					
	Case	ALUMINIUM CASE					
	Terminals	4+4 PINS					
	Filling	Special wax					
							
					Drafts system:	Name:: CBB65 metallized polypropylene film capacitor.	
					Approval	Wenling jiyang capacitor co.,LTD	

Customer ' s name					Customer recognizes:		
NO.	Specified voltage and frequency	Specified capacity and capacity deviation	Over all dimension	Remark			
1	450VAC 50/60Hz	20+5 $\mu$ F $\pm$ 5%	50 $\times$ 85	A1			
2	450VAC 50/60Hz	25+5 $\mu$ F $\pm$ 5%	50 $\times$ 85				
3	450VAC 50/60Hz	30+5 $\mu$ F $\pm$ 5%	50 $\times$ 85				
4	450VAC 50/60Hz	35+5 $\mu$ F $\pm$ 5%	50 $\times$ 85				
5	450VAC 50/60Hz	40+5 $\mu$ F $\pm$ 5%	50 $\times$ 90				
Carry out standard		GB/T3667.1-2016/IEC60252-1: 2013					
Operating temp range		(-40~+70 $^{\circ}$ C)	Lifespan garden	C CLASS			
Withstanding standard		Between terminals	2.0Un				
		Terminals to case	2.5KVC/2S				
		safety class	S2				
Capacitance tolerance		$\pm$ 5%					
Loss angle tangent		$\leq$ 0.0050 (1000 HZ)					
	Shape	See right picture					
	Condenser fuse	Have self-healing					
	Case	ALUMINIUM CASE					
	Terminals	4+4+4 PINS					
	Filling	Special wax					
					Drafts system:	Name: CBB65 metallized polypropylene film capacitor.	
					Approval	Wenling jiyang capacitor co.,LTD	

Customer ' s name					Customer recognizes:	
NO.	Specified voltage and frequency	Specified capacity and capacity deviation	Over all dimension	Remark		
1	450VAC 50/60Hz	45+5 $\mu$ F $\pm$ 5%	50 $\times$ 105	A1		
2	450VAC 50/60Hz	50+5 $\mu$ F $\pm$ 5%	50 $\times$ 105			
3	450VAC 50/60Hz	55+5 $\mu$ F $\pm$ 5%	50 $\times$ 125			
4	450VAC 50/60Hz	60+5 $\mu$ F $\pm$ 5%	50 $\times$ 125			
Carry out standard		GB/T3667.1-2016/IEC60252-1: 2013				
Operating temp range		(-40~+70 $^{\circ}$ C)	Lifespan garden	C CLASS		
Withstanding standard		Between terminals	2.0Un			
		Terminals to case	2.5KVC/2S			
		safety class	S2			
Capacitance tolerance		$\pm$ 5%				
Loss angle tangent		$\leq$ 0.0070 (1000 HZ)				
	Shape	See right picture				
	Condenser fuse	Have self-healing				
	Case	ALUMINIUM CASE				
	Terminals	4+4+4 PINS				
	Filling	Special wax				
					Drafts system:	Name: CBB65 metallized polypropylene film capacitor.
					Approval	Wenling jiayang capacitor co.,LTD

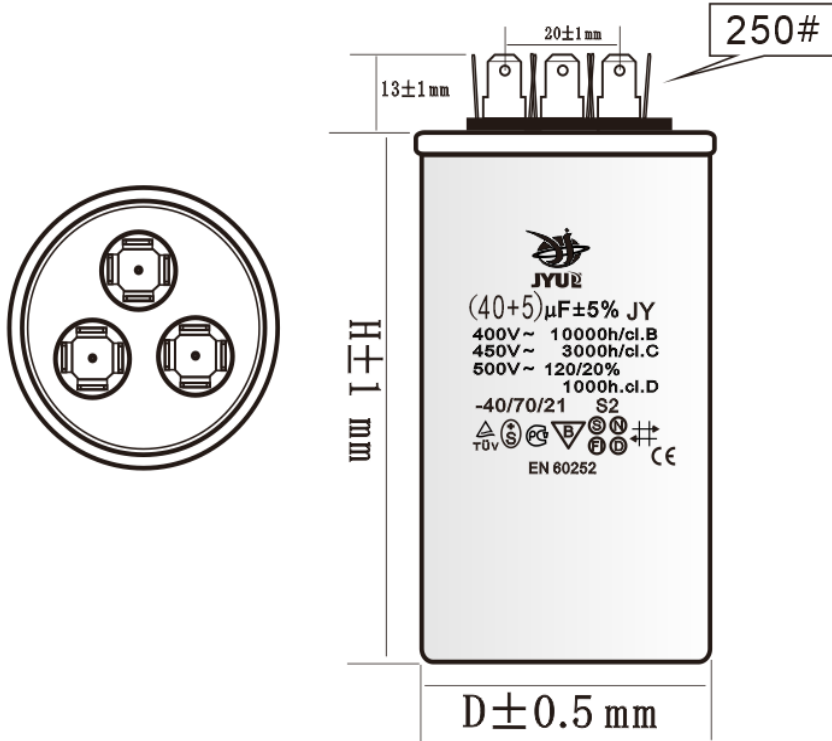