
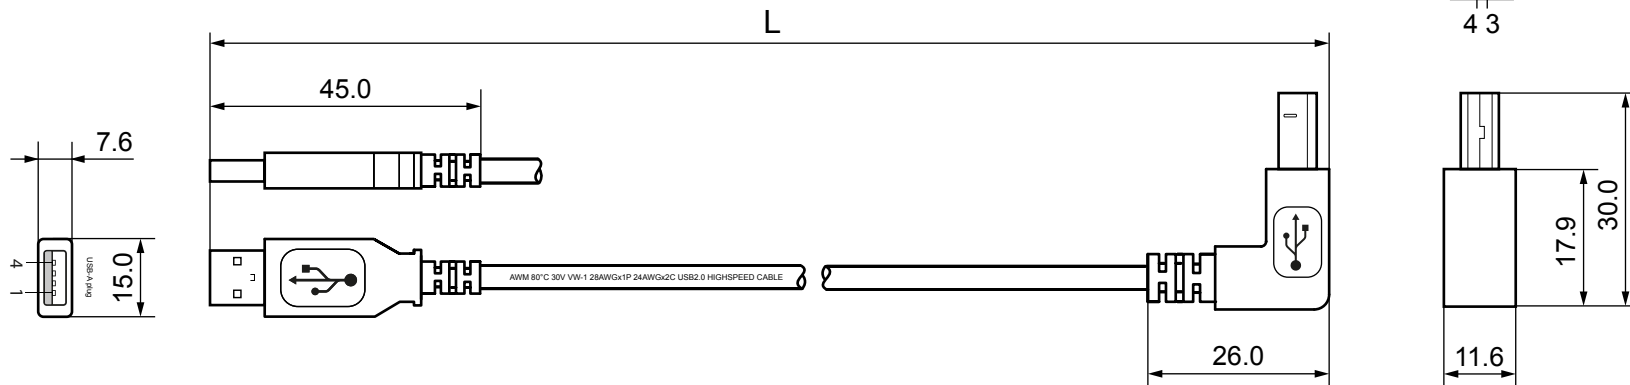


1 2 3 4 5 6 7 8 9 10 11 12 13 14

A

Steckermaßtoleranzen: ±1 mm
 Plug size tolerances: ±1 mm

USB B plug



B

C


D

E

F

G

H



Nr. / No.	Länge / Length (m)
93016	0.50
93017	1.00
35017	1.00 (PL)
21017	1.00 (SB)

USB 2.0 Hi-Speed Kabel

- USB-A Stecker > USB-B 90° Winkelstecker
- USB Standard: High Speed USB 2.0
- Innenleiter: 2xAWG24 + 2xAWG28 Kupfer
- Isolierung: PVC
- Schirmung: doppelt
- Datenrate: max. 480 Mbit/s

- RoHS-konform

USB 2.0 Hi-Speed cable

- USB-A plug > USB-B 90° angled plug
- USB Standard: High Speed USB 2.0
- Inner conductor: 2xAWG24 + 2xAWG28 copper
- Insulation: PVC
- Shielding: double
- Data rate: max. 480 Mbps

- RoHS compliant

Änderungen

Änderungen		Datum	Name
Datum	Name	gez.:	tf
20.03.2015	tf	gepr.:	tf
		Norm:	
Änderungen vorbehalten / Subject to change			

Bezeichnung	Blatt
USB AB 90° HiSpeed 2.0	
Zeichnungs-Nr.:	von



1 2 3 4 5 6 7 8 9 10 11 12 13 14

J

J