


TEC112706

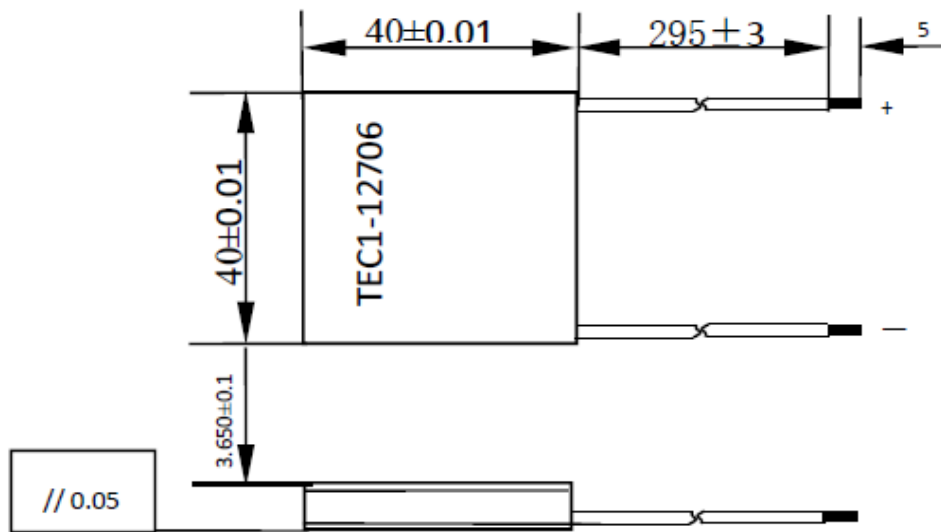

Product standards	Complies with international ROHS standards
Operating temperature range	-55-120 °C
Maximum current (TH30 °C)	6A
Maximum voltage (TH30 °C)	15.4V
Maximum cooling power	51.4W
Porcelain chip specifications	40x40x0.76+0.4
Solder requirements	B58-138 °C
Component specifications	PNP710N115-120130
Component logarithm	126
Overall dimensions	40x40x3.65±0.1
Lead wire requirements	Solder 20 # silicone wire, wire length 300mm, strip 4mm
Sealing requirements	Sealing 704 silicone
Temperature difference range (TH30 °C)	63 °C
Resistance range (TH30 °C)	2.0-2.3Ω
Packaging standards	Foam box shockproof packaging plus corrugated carton