


3.0X3.0 mm SMD SAW Filter

Feature


- Small size 3.0x3.0x1.25mm
- Welding can be done with automatic mounting
- Low-loss SAW component
- Low amplitude ripple
- Sharp rejections at both out-bands
- RoHS Compliant



Electrical Specifications

Item		Specifications	Unit
Frequency Range	f_c	300~2605MHz	MHz
Standard Frequency	f_c	433.92,861,915,1575.42,1582.4,2492 Band1,2,3,5,6,8,12,13,16,17,20,27,28,34,38,39,40,41	MHz
Band Width		6, 10, 15,50 or specify	MHz
Insertion Loss (min)	IL	1.0,1.5,3.0, 6.5 or specify	dB
Operating Temperature Range		-40~+85	°C
Storage Temperature Range		-55~+125	°C

Dimension(mm)

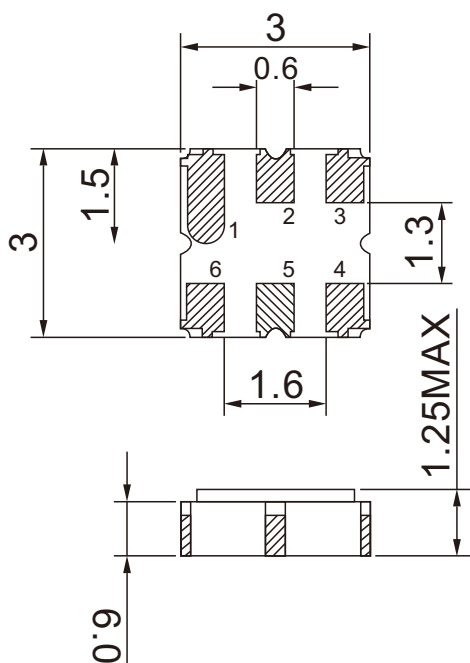

Pin No.	Description
2	Input
5	Output
1,3,4,6	Ground