



## TO-220 Plastic-Encapsulate Voltage Regulators

**L7815CV** Three-terminal positive voltage regulator

### FEATURES


Maximum Output current  $I_{OM}$ : 1.5 A

Output voltage  $V_o$ : 15 V

Continuous total dissipation

$P_D$ : 1.5 W ( $T_a = 25^\circ C$ )

15 W ( $T_c = 25^\circ C$ )

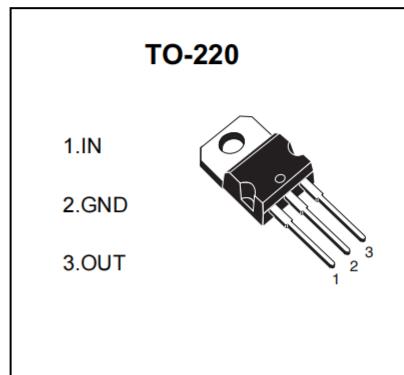

### ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

| Parameter                            | Symbol          | Value    | Unit |
|--------------------------------------|-----------------|----------|------|
| Input Voltage                        | $V_i$           | 35       | V    |
| Thermal resistance junction-air      | $R_{\theta JA}$ | 83.3     | °C/W |
| Thermal resistance junction-cases    | $R_{\theta JC}$ | 8.33     | °C/W |
| Operating Junction Temperature Range | $T_{OPR}$       | 0~+150   | °C   |
| Storage Temperature Range            | $T_{STG}$       | -55~+150 | °C   |

ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE ( $V_i=23V$ ,  $I_o=500mA$ ,  $C_i=0.33\mu F$ ,  $C_o=0.1\mu F$ , unless otherwise specified)

| Parameter                | Symbol                | Test conditions                                | MIN     | TYP   | MAX  | UNIT  |       |
|--------------------------|-----------------------|--|---------|-------|------|-------|-------|
| Output voltage           | $V_o$                 | 25°C   | 14.4    | 15    | 15.6 | V     |       |
|                          |                       | 17.5V≤ $V_i$ ≤30V, $I_o=5mA-1A$<br>$P\leq 15W$ | 0~125°C | 14.25 | 15   | 15.75 | V     |
| Load Regulation          | $\Delta V_o$          | $I_o=5mA-1.5A$                                 | 25°C    |       | 12   | 300   | mV    |
|                          |                       | $I_o=250mA-750mA$                              | 25°C    |       | 4    | 150   | mV    |
| Line regulation          | $\Delta V_o$          | 17.5V≤ $V_i$ ≤30V                              | 25°C    |       | 12   | 300   | mV    |
|                          |                       | 20V≤ $V_i$ ≤26V                                | 25°C    |       | 3    | 150   | mV    |
| Quiescent Current        | $I_q$                 |  | 25°C    |       | 4.3  | 8     | mA    |
| Quiescent Current Change | $\Delta I_q$          | 17.5V≤ $V_i$ ≤30V                              | 0~125°C |       |      | 1     | mA    |
|                          | $\Delta I_q$          | 5mA≤ $I_o$ ≤1A                                 |         |       |      | 0.5   | mA    |
| Output voltage drift     | $\Delta V_o/\Delta T$ | $I_o=5mA$                                      | 0~125°C |       | -1   |       | mV/°C |
| Output Noise Voltage     | $V_N$                 | 10Hz≤f≤100KHz                                  | 25°C    |       | 90   |       | μV    |
| Ripple Rejection         | RR                    | 18.5V≤ $V_i$ ≤28.5V, f=120Hz                   | 0~125°C | 54    | 70   |       | dB    |
| Dropout Voltage          | $V_d$                 | $I_o=1A$                                       | 25°C    |       | 2    |       | V     |
| Output resistance        | $R_o$                 | f=1KHz   | 25°C    |       | 19   |       | mΩ    |
| Short Circuit Current    | $I_{sc}$              |  | 25°C    |       | 230  |       | mA    |
| Peak Current             | $I_{pk}$              |  | 25°C    |       | 2.1  |       | A     |

### TYPICAL APPLICATION

