



The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1 2 3 4 5 6 7 8

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 10/11/14'		LJC 10/11/14'
B	DRAWING UPDATE	JLZ 05/03/17'	HZW 05/03/17'	LJC 05/03/17'
C	DRAWING UPDATE	JLZ 11/09/18'		

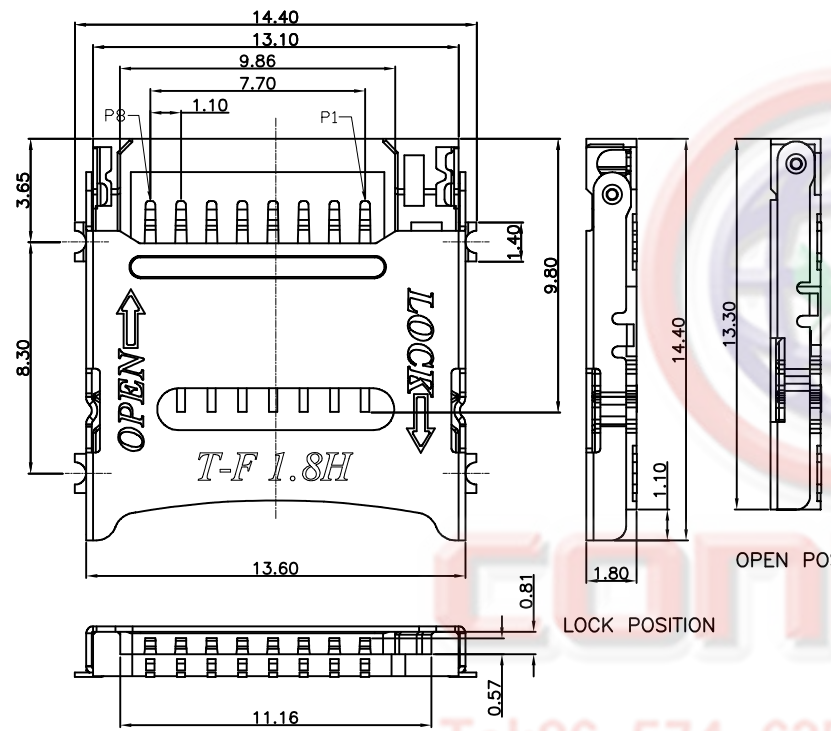

PIN NO.	PIN ASSIGNMENT
PIN 8	DAT1
PIN 7	DAT0
PIN 6	VSS
PIN 5	GLK
PIN 4	VDD
PIN 3	CMD
PIN 2	CD/DAT3
PIN 1	DAT2

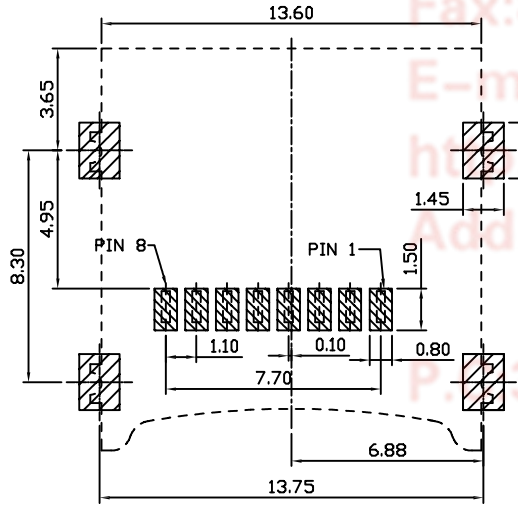

RECOMMENDED PCB LAYOUT
TOLERANCES: ±0.05

- Notes:
- Material:
 - Housing: High Temperature LCP, UL94V-0 Roted Color: Black.
 - Contacts: Copper Alloy.
 - Stator: Copper Alloy.
 - Shell: Stainless Steel.
 - Specifications:
 - Operate Temperature: -30° C~+80° C
 - Insulation Resistance: 100MQ Min.
 - Contact Resistance: 30mΩ max.
 - Withstanding Voltage: 100V AC 1min.
 - Operating Voltage: 30V AC/DC.
 - Current Rating: 0.5A
 - Product Number Code:

DS1139-06 - XX X X X X X X

- Packing Type
R: Tape On Reel
- Shell Plating
S: Stainless
- Housing color
B: Black
- Contact Plating
0: Selective gold flash
4: Selective 3u" gold
J: Selective 5u" gold
1: Selective 10u" gold
- Mounting type
S: SMT type
- Connector type
S: Socket
- No. of contacts
08:08pin

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION	TITLE
	Micro SD Card H=1.8mm SMT Type
UNITS	mm
SHEET SIZE	A4
SERIES	DS1139-06 SERIES

DRAWING TYPE	CUSTOMER
SCALE	1:1 SHEET 1 OF 1
DRAWING NO.	C-DS1139-06-XXXXXXX-C

晨翔电子有限公司
CONNFLY CONNELY ELECTRONIC CO. LTD

1 2 3 4 5 6 7 8