

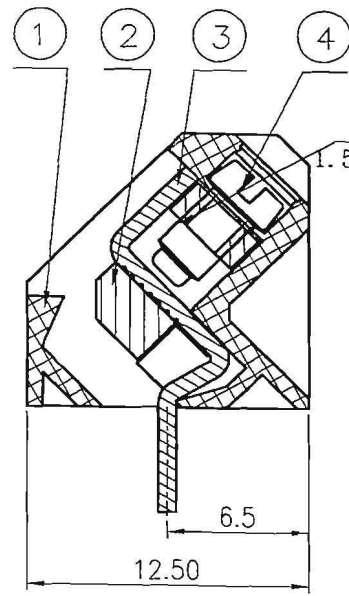
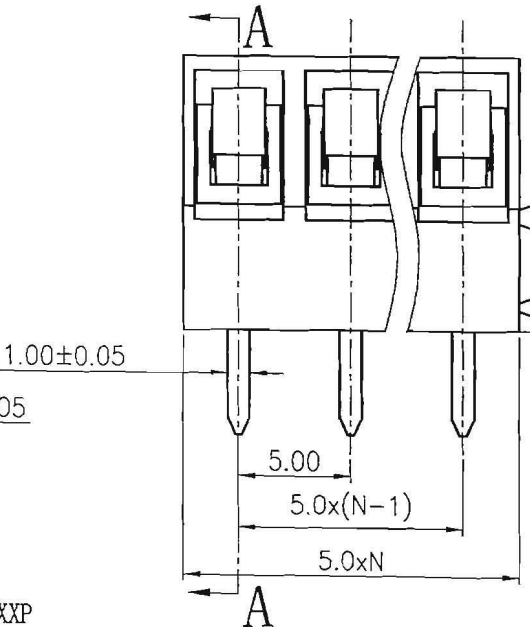


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
▲		增加VDE、CE标志	LJH	12/26/07
▲		图面更新	WLM	08/02/08
▲	10-0319	增加型号63200115P和壳号63200115	COCC	09/27/10
▲		图面更新	CHEN	10/30/12
▲	13-0279	增加螺丝拧紧标准	WHZ	11/05/13

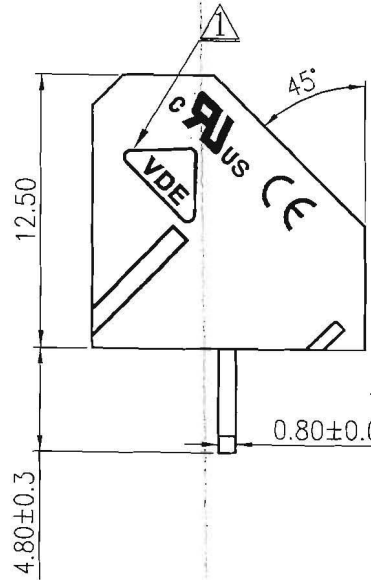

- Notes:
1. Pitch: 5.0mm, poles: 2-XXP
 2. Rated voltage/current: UL 300V/15A
VDE 250V/24A
 3. Operation temperatures: -40° C ~ +105° C
 4. Withstanding Voltage: AC2000V/1min
 5. Insulation Resistance: 5000MΩ/DC1000V
 6. Wire Range: 22-12AWG, 2.5mm²
 7. Torque Value: M2.5, 4.08kgf.cm
 8. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
	over 6	over 10	over 30	over 60	over 100	over 150		
to 6	to 10	to 24	to 30	to 60	to 100	to 150	□	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	

4	DG330 "+" Screws	▲ S000005340 (H)	XX	Steel	Cr ³⁺ Zn
3	DG330-Pin header	4011B00010 (H)	XX	Brass	SnCe plated
2	DG330-Cage	X000000330 (H)	XX	Brass	Ni plated



ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
	DG330-5.0-Housing	4011A0YXXA (H)	1	PA66	UL94V-0

MM (INCH)	DFTO ZYH	DATE 08/31/07
CHKD	DATE	
MFO	DATE	
APPL Alex	DATE 11/30/13	

TOLERANCES EXCEPT AS NOTED		DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
MM		NAME	
.0 ±	±	DG330-5.0-XXP-1Y-02A (H)	
.00 ±	±	DRAWING NO. DG330-5.0-E03	
.000 ±	±	/PART NO.	
ANGLES ± 1°		SCALE : 1:1	
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	

SIZE A3	REV 15
11/15/13	OF 1