


# 9111 Series

## H.D. 2.0mm(0.079") Futurebus(+)5 Rows Male Straight Type

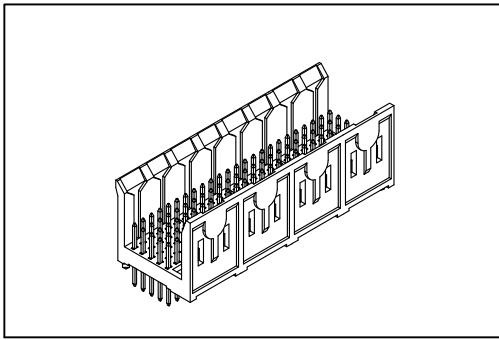

### Material:




Housing: High Temperature Plastic UL94V-0.  
Contacts: Copper Alloy.

### Electrical Characteristics:

Current Rating: 1 A.  
Dielectric Withstanding Voltage: AC 1000V.  
Insulator Resistance: 1000MΩ min.  
Contact Resistance: 30mΩ max. .  
Operating Temperature: -65°C ~+125°C.



### Features:

- \* 2mm high density futurebus+ male solder and press fit type.
- \* Available pin count from 30~390.
- \* Side by side stackable.
- \* Various solder tail length options.
- \* Push-Fit peg.

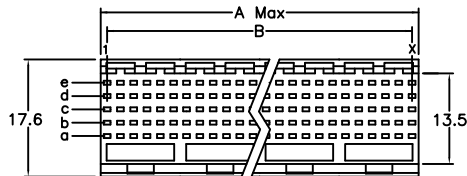


Dip Type

Press Fit Type

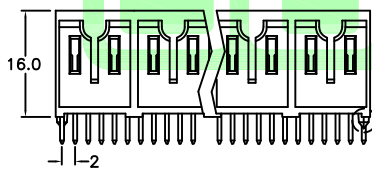

Option A

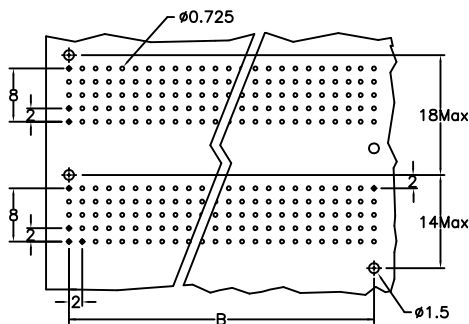

P.C. Board Layout

Position	Dimension	
	A	B
30	11.95	10
60	23.95	22
90	35.95	34
120	47.95	46
150	59.95	58
180	71.95	70
210	83.95	82
240	95.95	94
270	107.95	106
300	119.95	118
330	131.95	130
360	143.95	142
390	155.95	154

## Ordering information

9111- 5 1 30 A  
Series 5: 5Rows 1: Male Position A: A ~ V  
Signal See Page CB01

C 10  
C: Dip Tin Contact Gold  
G: Gold 10: 10μ  
30: 30μ

D  
D: Dip Type  
P: Press Fit Type

U  
U: Tube  
Package