
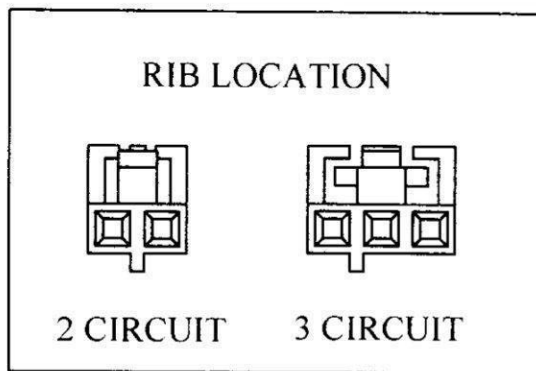
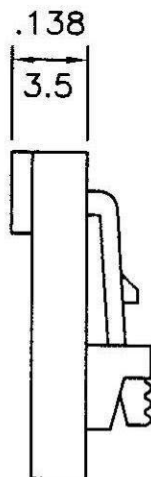


**Specifications**

- \* Poles:2-18
- \* Material:PBT UL94V-0 ,BLACK
- \* Current rating: 2.5A AC, DC
- \* Voltage rating: 250V AC, DC
- \* Temperature range: -25°C~+85°C
- \* Insulation resistance: 1,000MΩ min.
- \* Withstand voltage: 800V AC/minute

CIRCUITS	DIMENSION in.(mm)	
	A	B
2	0.100(2.54)	0.210(5.35)
3	0.200(5.08)	0.310(7.89)
4	0.300(7.62)	0.410(10.43)
5	0.400(10.16)	0.510(12.97)
6	0.500(12.70)	0.610(15.51)
7	0.600(15.24)	0.710(18.05)
8	0.700(17.78)	0.810(20.59)
9	0.800(20.32)	0.910(23.13)
10	0.900(22.86)	1.010(25.67)
11	1.000(25.40)	1.110(28.21)
12	1.100(27.94)	1.210(30.75)
13	1.200(30.48)	1.310(33.29)
14	1.300(33.02)	1.410(35.83)
15	1.400(35.54)	1.510(38.37)
16	1.500(38.10)	1.610(40.91)
17	1.600(40.64)	1.710(43.45)
18	1.700(43.18)	1.810(45.99)

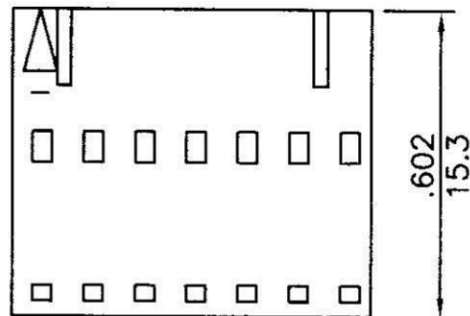

**H 7066 — 02 P B 0 0 0 0 R**

- |   |  |                     |
|---|--|---------------------|
| 1. PRODUCTS:<br>H:Housing                 | 4. CONTACT TYPE:<br>P:Non Distribution | 7. FILL IT WITH "0" |
| 2. SERIES NO.:<br>7066<br>(W/Locking Rib) | 5. INSULATOR COLOR:<br>B:Black         | 8. FILL IT WITH "0" |
| 3. CONTACT NO.:<br>02-18                  | 6. FILL IT WITH "0"                    | 9. FILL IT WITH "0" |
|   |  | 10. R:ROHS          |

<b>RoHS Compliant</b>	<b>HSM 玄茂科技股份有限公司</b>	
	<b>HSUAN MAO TECHNOLOGY CO., LTD.</b>	
APPD. 核准 BETTY	TOLERANCE 容許公差 0 ± .00 ± ANG ±	PART NAME 品名 2.54mm HOUSING XXP W/BUMP & W/LOCKING RIBS BLACK COLOR ROHS
DWG. 製圖 KAREN		SCALE 比例 參考
DATE 制表日 2014/09/30	UNIT 單位 MM	PART NO. 料號 H7066-XXPB0000R
	PAGE 張數 1 OF 1	