



Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.
 Contacts: Copper Alloy.
 Lock: Copper Alloy.


Electrical Characteristics:

Current Rating: 2 AMP.
 Dielectric Withstanding Voltage: AC 1000V for 1minute.
 Insulator Resistance: 1000MΩ min. at DC 500V.
 Contact Resistance: 20mΩ max. at DC 100m A.
 Operating Temperature: -55°C ~ +125°C .

* **RoHS Compliant**

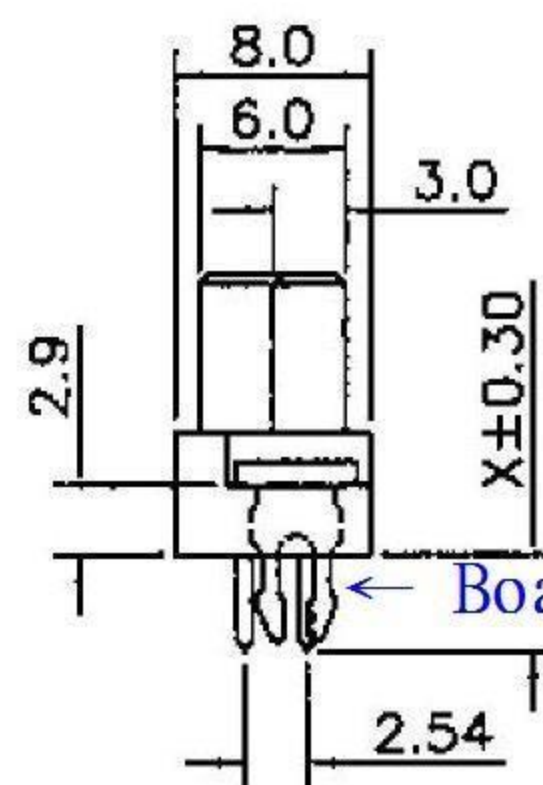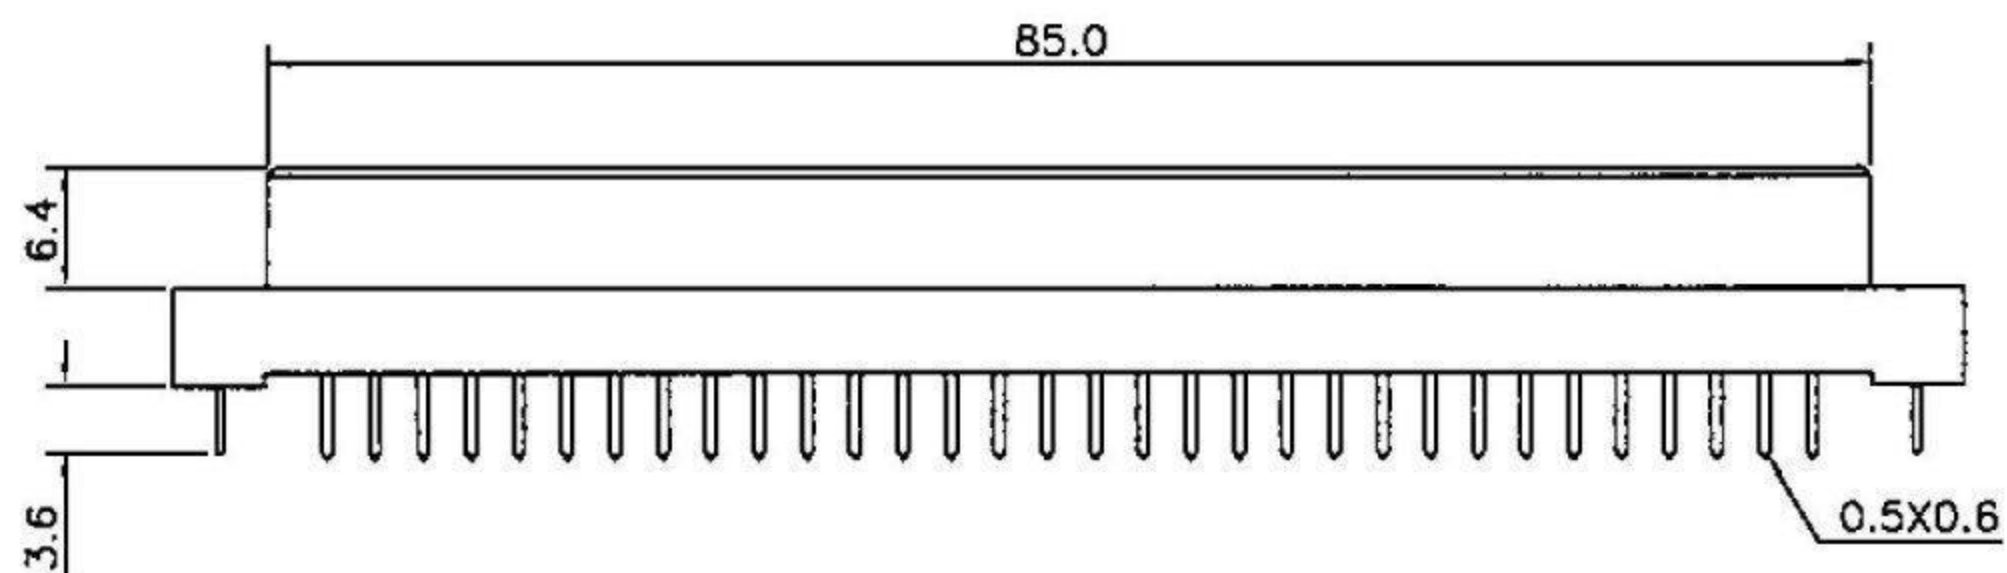

Pitch	Position	Rows with Contacts	Contact Arrange	X length			
				S	A	B	D
2.54mm	64	a b		4.0	2.5	13	17
	32	a -					

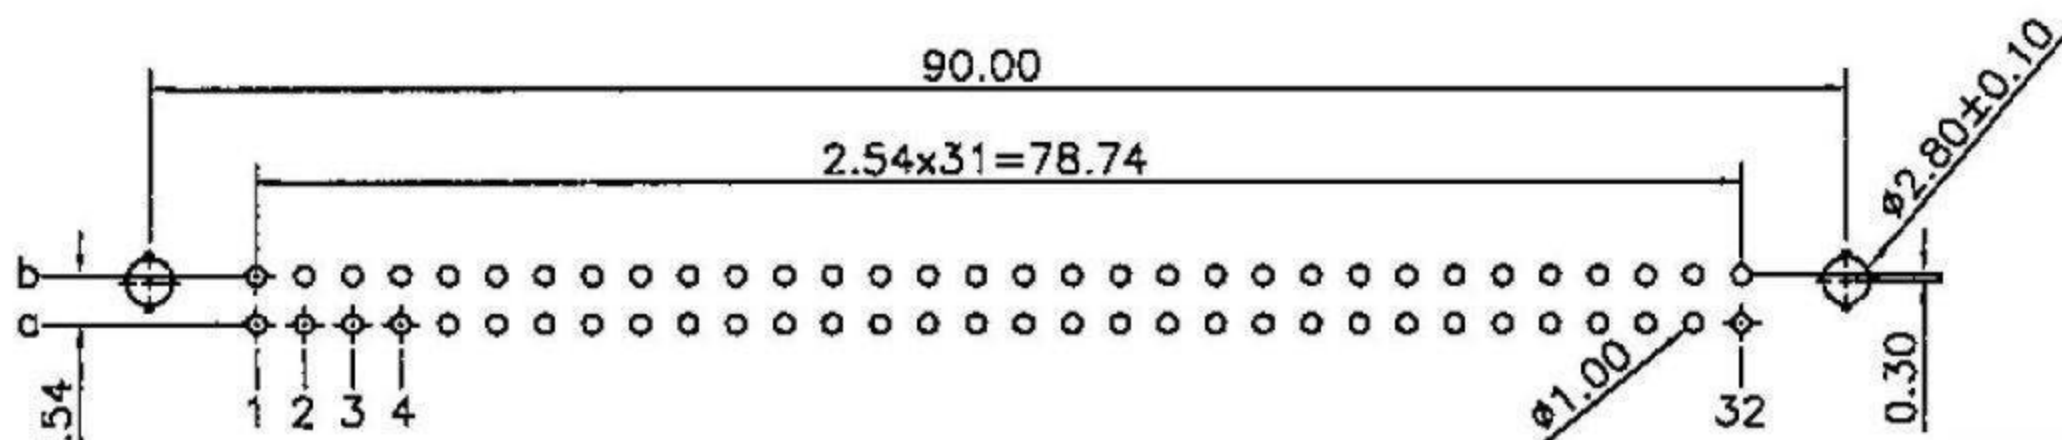

P.C. Board Layout

RoHS Compliant	HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准		TOLERANCE .x = ±0.5 .x = ±0.25 .xx = ±0.15
DWG. 製圖 HELEN	SCALE 比例 參考	PART NAME 品名 DIN41612 2.54mm DIP TYPE 180° DUAL ROW BODY (64P & 32P) SIZE-(A+B or A) 64P FEMALE SELECTIVE GOLD PLATING ROHS LOW-LEAD
DATE 制表日 2010/9/21	UNIT 單位 MM	PART NO. 料號 C4162-(32,64)(F,B)(A,C)AXSXR
	PAGE 張數 1 OF 1	REV. 版本 A