
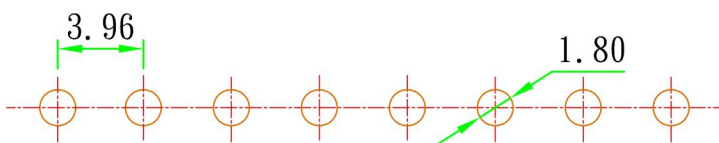



1.14mm Square Pin

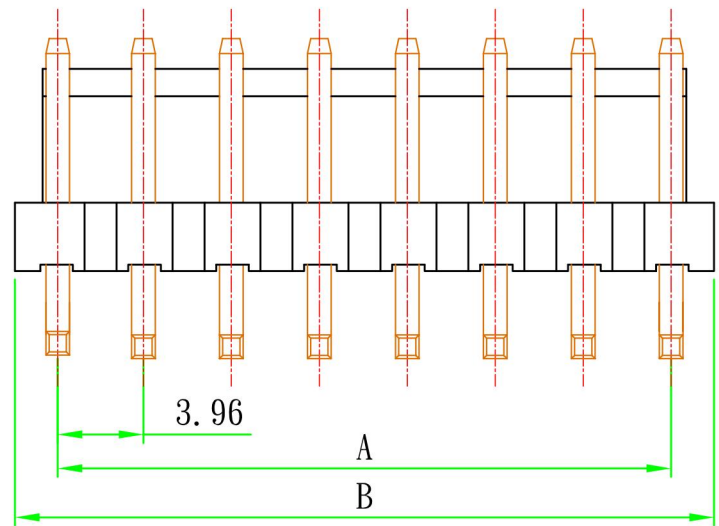

RECOMMENDED P. C. BOARD HOLE DIMM.

Specifications

Current Rating: 7A AC, DC
 Voltage Rating: 250V AC Maximum
 Operating Temp: -25°C ~ +85°C
 Contact Resistance: Ω Max
 Insulation Resistance: 1000m Ω Min
 Dielectric Withstanding Voltage: 1500V AC, DC Min
 Terminal Material: Brass/Tin-plated
 Plating: Tin or Gold plated
 Material: Nylon 66, UL94V-0
 Color: White or Natural

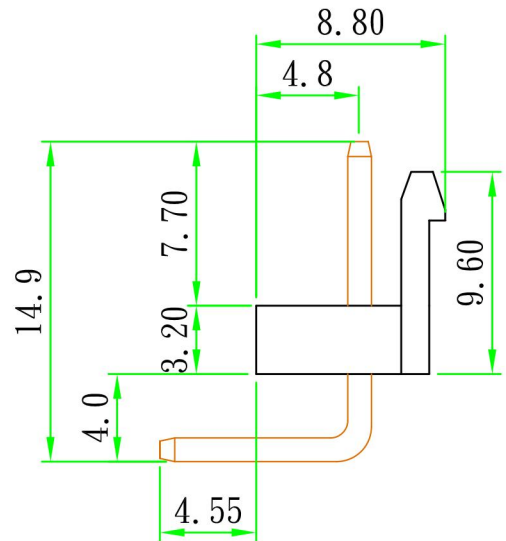

Poles	Dimension mm (in.)	
	A	B
2	3.96 (0.156)	7.92 (0.312)
3	7.92 (0.312)	11.92 (0.469)
4	11.88 (0.468)	15.84 (0.624)
5	15.84 (0.624)	19.84 (0.781)
6	19.80 (0.780)	23.80 (0.937)
7	23.76 (0.935)	27.88 (1.098)
8	27.72 (1.074)	31.74 (1.250)
9	31.68 (1.247)	35.86 (1.412)
10	35.64 (1.403)	39.90 (1.571)
11	39.60 (1.559)	43.84 (1.726)
12	43.56 (1.715)	47.92 (1.887)
13	47.52 (1.871)	51.72 (2.036)
14	51.48 (2.027)	55.92 (2.202)

**RoHS
Compliant**

**HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.**

APPD. Betty	 SCALE 参考	TOLERANCE .0 ±0.5 .00 ±0.35 ANG. ±
DWG. Betty		UNIT M M
DATE 2013/02/01	PAGE 1 OF 1	SIZE A 4 REV. C

PART NAME 品名	
JST VH:3.96mm WAFER XXP RIGHT TYPE WITH LOCKING RIBS TIN PLATED WHITE COLOR ROHS	
PART NO. 料號	W3966-XXPRTW00R