


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner, CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1 2 3 4 5 6 7 8

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 05/08/08'		LJC 05/08/08'
B	DRAWING UPDATE	JLZ 05/26/17'	HZW 05/26/17'	LJC 05/26/17'
C	DRAWING UPDATE	JLZ 03/08/19'		

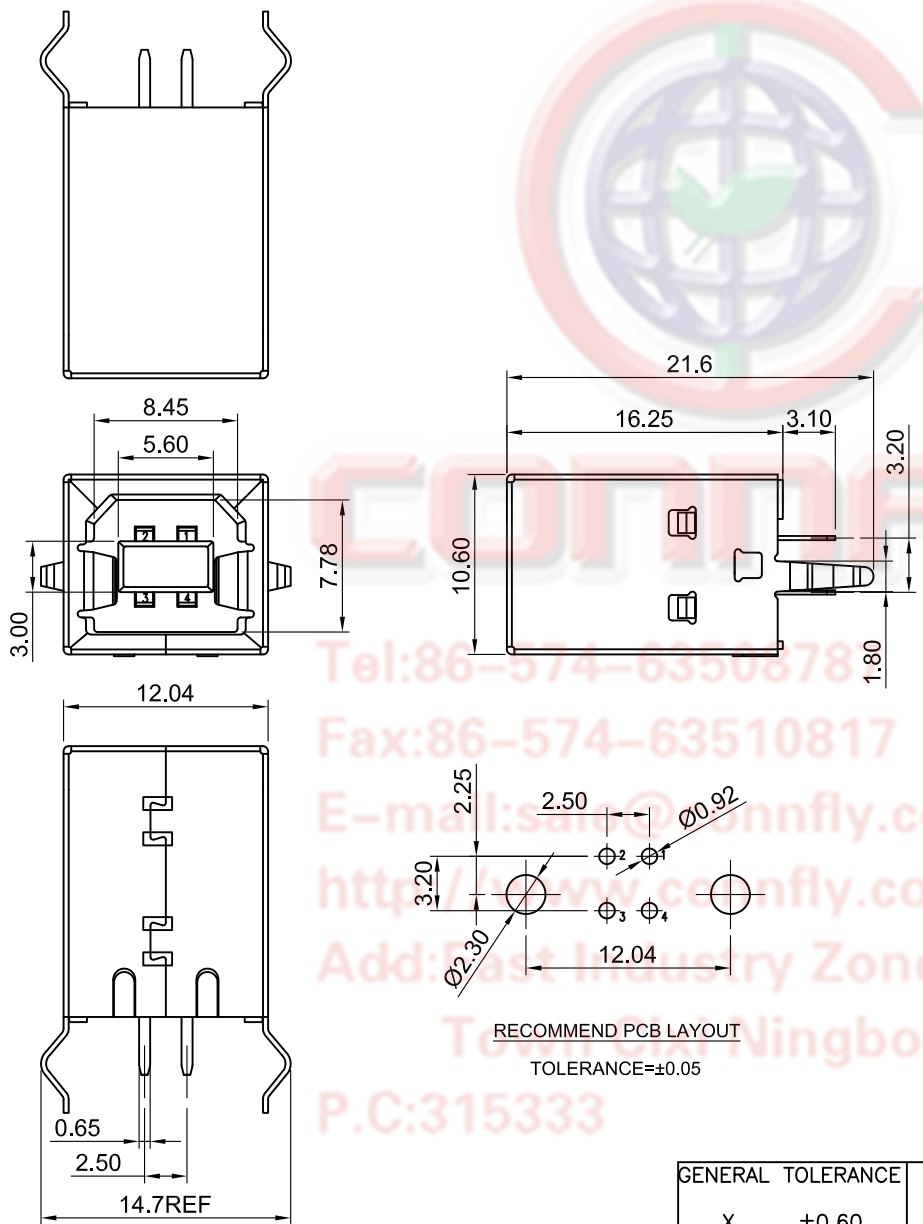

NOTES:

- SPECIFICATIONS:
 - 1.0 CONTACT RESISTANCE:30mΩ max.
 - 1.1 INSULATION RESISTANCE:1000MΩ min.
 - 1.2 CURRENT RATING:1.5A.
 - 1.3 VOLTAGE RATING:30VDC.
 - 1.4 DIELECTRIC WITHSTANDING VOLTAGE:AC 500V FOR 1 Minute.
 - 1.5 TEMPERATURE RANGE: -40°C ~ +85°C.

- MATERIALS:
 - 2.0 HOUSING:PBT+30% GLASS FIBER(UL 94-0).
 - 2.1 CONTACT:COPPER ALLOY
 - 2.2 SHELL:COPPER ALLOY.

3. PRODUCT NUMBER CODE:

DS1099-01 - X X X

CONTACT PLATING
 0: Selective Gold Flash
 03: Selective Gold 3u"
 30: Selective Gold 30u"
 SHELL PLATING
 N: Nickel
 COLOR OF HOUSING:
 W: WHITE
 B: BLACK

Tel:86-574-6350878
 Fax:86-574-63510817
 E-mail:sales@connely.com
 http://www.connely.com
 Add:East Industry Zone KuangYan
 Town Ningbo China
 P.C:315333

RECOMMEND PCB LAYOUT
TOLERANCE=±0.05

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	USB B TYPE FEMALE V/T DIP TYPE (Copper Shell)	
X.	±0.60	X.	±5°	UNITS	mm	SHEET	A4	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1099-01 SERIES	
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNELY CONNELY ELECTRONIC CO. LTD				
DRAWING TYPE		CUSTOMER						
SCALE		1:1	SHEET 1 OF 2					
DRAWING NO.		C-DS1099-01-XXX-X-C						

1 2 3 4 5 6 7 8

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of the information herein, in any format or manner, CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1 2 3 4 5 6 7 8



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 05/08/08'		LJC 05/08/08'
B	DRAWING UPDATE	JLZ 05/26/17'	HZW 05/26/17'	LJC 05/26/17'
C	DRAWING UPDATE	JLZ 03/08/19'		

NOTES:

- SPECIFICATIONS:
 - CONTACT RESISTANCE:30mΩ max.
 - INSULATION RESISTANCE:1000MΩ min.
 - CURRENT RATING:1.5A.
 - VOLTAGE RATING:30VDC.
 - DIELECTRIC WITHSTANDING VOLTAGE:AC 500V FOR 1 Minute.
 - TEMPERATURE RANGE:-40°C ~ +85°C.

- MATERIALS:
 - HOUSING:PBT+30% GLASS FIBER(UL 94-0).
 - CONTACT:COPPER ALLOY
 - SHELL:STEEL.

3. PRODUCT NUMBER CODE:

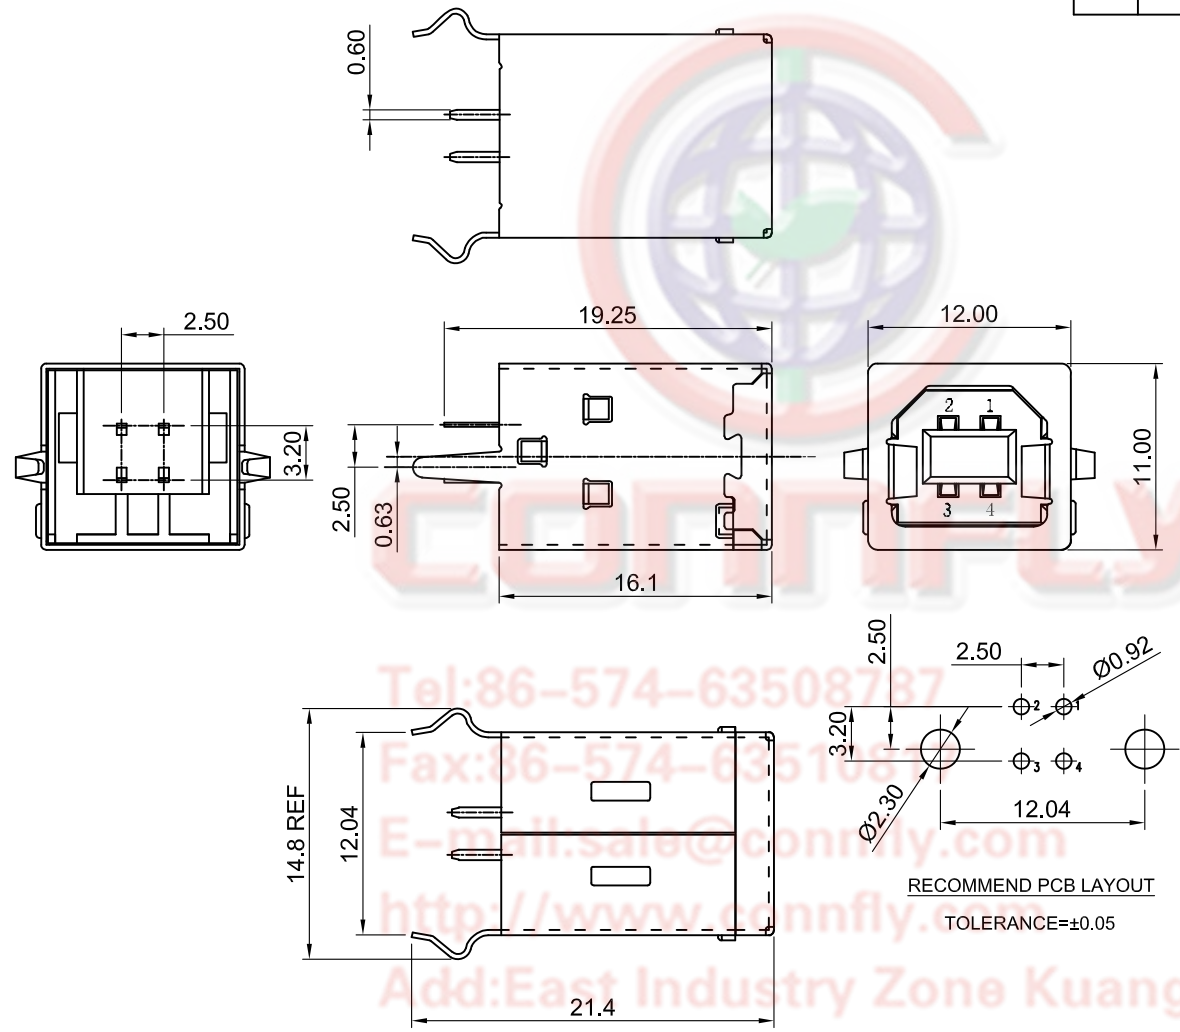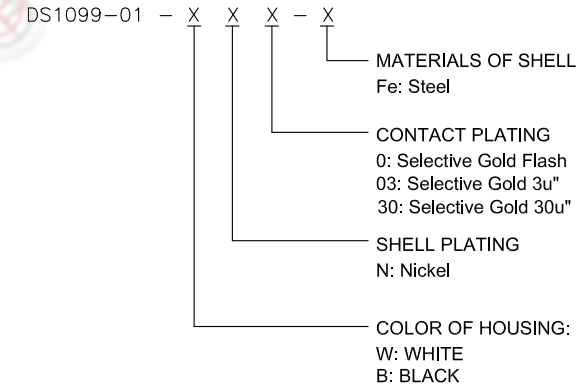

RECOMMEND PCB LAYOUT
TOLERANCE=±0.05

Tel:86-574-63508737
 Fax:86-574-635165
 E-mail:sale@connfly.com
 http://www.connfly.com
 Add:East Industry Zone KuangYan
 Town Cixi Ningbo China
 P.C:315333

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	2 OF 2
DRAWING NO.	C-DS1099-01-XXX-Fe-C		

PROJECTION		TITLE	USB B TYPE FEMALE V/T DIP TYPE (Steel Shell)	
UNITS	mm	SHEET	A4	
SHEET SIZE	A4	SERIES	DS1099-01 SERIES	

晨翔电子有限公司
CONNFLY CONNELY ELECTRONIC CO. LTD

1 2 3 4 5 6 7 8