


DIMENSION(UNIT:mm) 			A	14.2 ± 0.4	m/m
			B	28.5 ± 0.6	m/m
			C	6.35 ± 0.3	m/m
ELECTRICAL REQUIREMENTS			SCHEMATIC		
MIN 130 OHM	TEST FREQ	25 MHz			
MIN 280 OHM	TEST FREQ	100 MHz			
MATERIAL (ui)	800 ± 25%				
WIRE	2UEW φ 0.8 × 220mm				
WINDING	1 Ts				

IMPEDANCE					DIMENSION (UNIT : mm)				
FREQ	25 MHz	100 MHz			A	B	C		
SPEC	MIN 130 OHM	MIN 280 OHM			14.2 ± 0.4	28.5 ± 0.6	6.35 ± 0.3		
1	160.9	359			14.26	28.56	6.37		
2	161.5	356			14.27	28.54	6.36		
3	161.1	355			14.29	28.57	6.38		
4	160.5	354			14.27	28.50	6.35		
5	160.9	359			14.26	28.56	6.37		
6	161.5	356			14.27	28.54	6.36		
7	161.1	355			14.29	28.57	6.38		
8	161.3	355			14.25	28.60	6.38		
9	161.3	355			14.25	28.60	6.38		
10	160.5	354			14.27	28.50	6.35		
\bar{X}	161.1	356			14.27	28.55	6.37		
R	1.0	5			0.04	0.10	0.03		

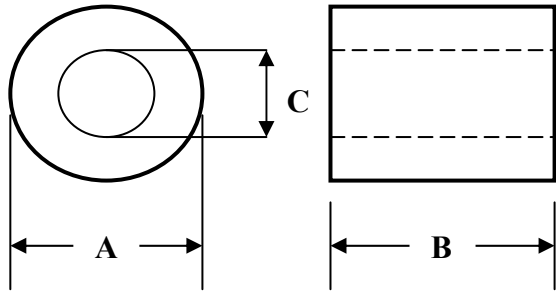