



受 控

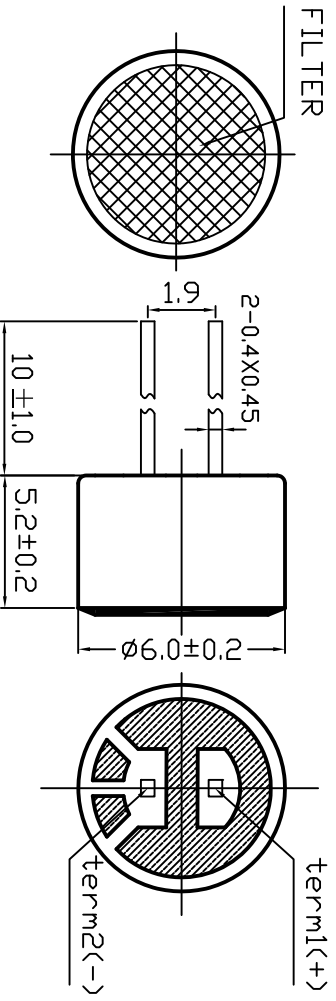

原理图

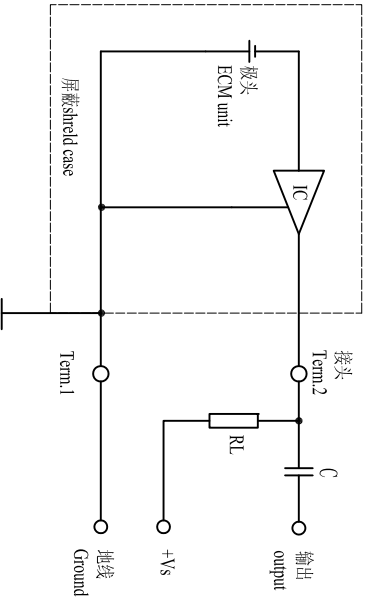

编号 NO.	项目 Items	规格 Specifications
1	额定电压 Rated Voltage	2V
2	工作电压 Operating Voltage	1.5V~10V
3	灵敏度 Sensitivity	-42± 3dB(0dB=1V/pa at 1KHz)
4	消耗电流 Current Consumption	0.5mA Max
5	频率范围 Frequency	100Hz~16000Hz
6	信噪比 S/N Ratio	≥60dB
7	灵敏度减低 Sensitivity Reduction	-3dB (Vcc=2V to 1.5V)
8	方向性 Directivity	Omnidirectional
9	测试条件 Testing Condition	1000Hz, Vs=2V, RL=2.2K Ω
10	壳体材料/颜色 Shell Material/Color	AL/Silver
11	工作温度 Operating Temperature	-25~+55 °C
12	贮存温度 Store Temperature	-25~+55 °C
13	重量 Weight	1.5g

备注:
Note: Compliance with ROHS

NO.	DATE	REVISION	REFERENCE DWG
1			

TOLERANCES UNLESS NOTED OTHERWISE			
DRAWN	DESIGN	CHECKED	APPROVED
	水成峰		梁树棠
DATE		CONTRACT NO.	
12.10.15			
AGENCY APPROVAL		KEPO MODEL NO.	
		KPCM-G6B-P	
		CUSTOMER NO.	
		DWC NO.	
		KP3.841.405R	
		UNIT	
		mm	
		SCALE	
		1:1	
		SHEET	

KEPO CO., LTD.
 TEL: (+86)574-88370330
 FAX: (+86)574-88370329