



# YETDA INDUSTRY LTD.

## 5mm Warm White Super Bright LED Lamps S500TWW4G-S-2800K

5mm with InGaN Dice ◦

Encapsulated with Water Clear Lens Package ◦

Long Leads ◦

### Absolute Maximum Ratings :

Parameter	Maximum Rating	Unit
Peak Forward Current	120	mA
Continuous Forward Current	70	mA
Operating Temperature Range	-40°C to +85°C	
Storage Temperature Range	-50°C to +100°C	
Lead Soldering Temperature	260°C for 3 seconds 1.6mm(0.063 inch) from body	


### Electro-Optical Characteristics (Ta = 25°C)

Parameter	Test Condition	Symbol	Min.	Typ.	Max.	Unit
Forward Voltage	IF = 20mA	Vf		3.0	3.8	V
Reverse Current	VR = 5V	Ir			10	uA
Luminous Intensity	IF = 20mA	Iv		12000		mcd
Spectral Bandwidth	IF = 20mA	$\Delta\lambda$				nm
Color Temperature	IF = 20mA	CCT		2800		K
Viewing Angle	IF = 20mA	2 $\theta$ 1/2		25		deg

Please refer to CIE1931 Chromaticity Coordinate diagram

### Package

Item: 500

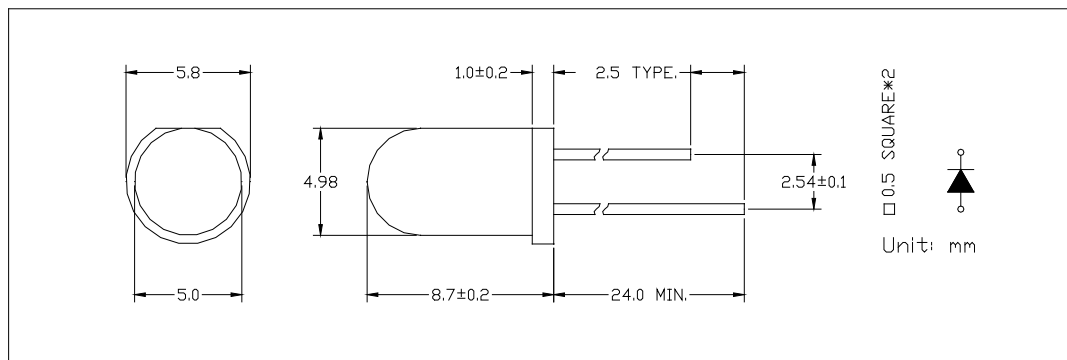

12JAN28



# YETDA INDUSTRY LTD.

Fig 1. Forward Current vs. Forward Voltage

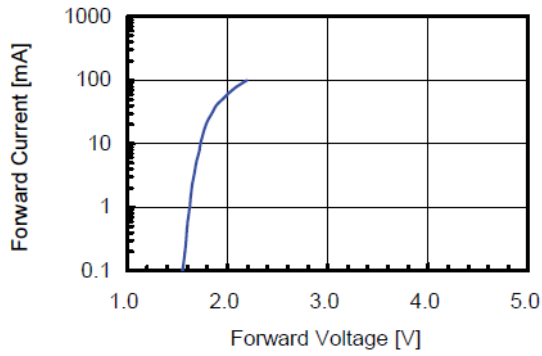


Fig 2. Relative Intensity vs. Forward Current

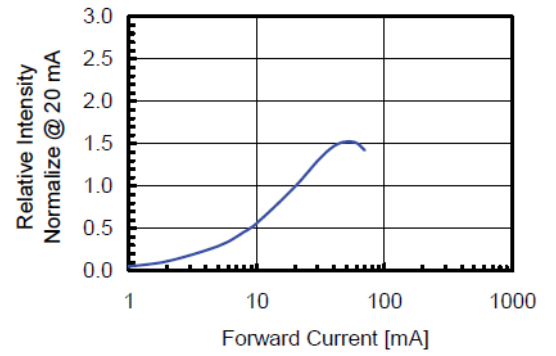


Fig 3. Forward Voltage vs. Temperature


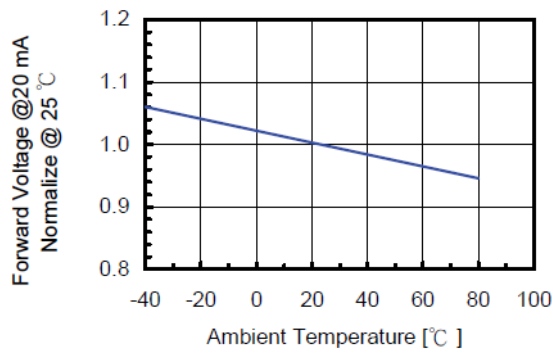


Fig 4. Relative Intensity vs. Temperature



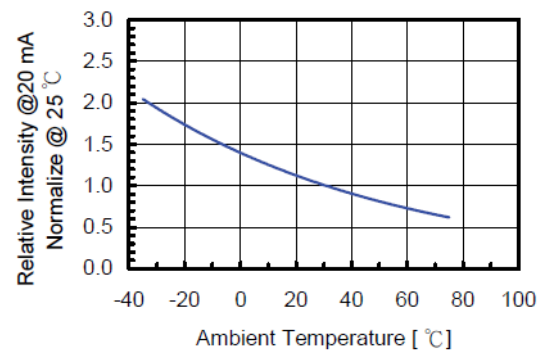

# YETDA INDUSTRY LTD.

## Soldering:

### 1. Manual of soldering


The temperature of the iron tip should not be higher than 260°C and

Soldering within 3 seconds per solder-land is to be observed

### 2. DIP soldering (Wave Soldering):

Preheating: 120°C~150°C within 5 sec. 260°C (Max)

Gradual Cooling (Avoid quenching)

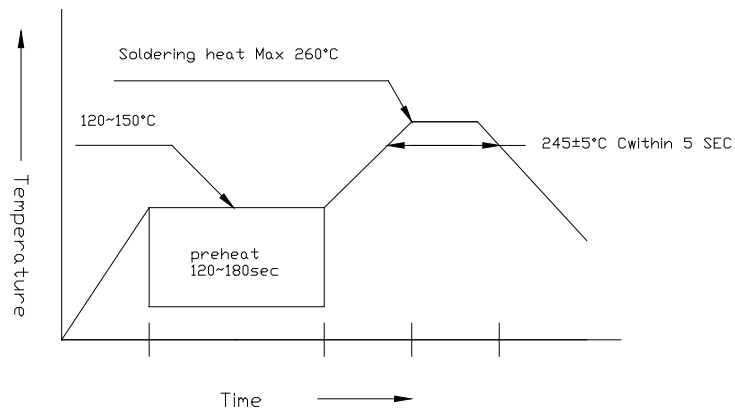

## •Handling:

Care must be taken not to cause to the epoxy resin portion of Yetda LEDS while it is exposed to high temperature.

Care must be taken not rub the epoxy resin portion of Yetda LEDS with hard or sharp article such as the sand blast and the metal hook