



OptoSupply

Light It Up

5x5x1.5mm Red & Pure Green & Red Top SMD LED

OSTXMBS4C1A-RGR

■Features

- High Luminous PLCC6 Top SMD LEDs
- 5.0x5.0x1.5mm Standard Directivity
- Superior Weather-resistance
- UV Resistant Silicone
- Water Clear Type

■Applications

- Toys/Games/Audio
- Small Area Illuminations
- Back Lighting/Other Lighting

■Absolute Maximum Rating

(Ta=25°C)

Item	Symbol	Value		Unit
		Red	Green	
DC Forward Current	I _F	50	30	mA
Pulse Forward Current*	I _{FP}	120	100	mA
Reverse Voltage	V _R	5	5	V
Power Dissipation	P _D	130	102	mW
Operating Temperature	T _{opr}	-30 ~ +85		°C
Storage Temperature	T _{stg}	-40 ~ +100		°C
Lead Soldering Temperature	T _{sol}	260°C/10sec		-

*Pulse width Max.10ms Duty ratio max 1/10

■Electrical -Optical Characteristics

(Ta=25°C)


Item	Symbol	Condition	Min.	Typ.	Max.	Unit
DC Forward Voltage	V _F (R)	I _F =20mA	1.8	2.1	2.6	V
	V _F (G)	I _F =20mA	2.7	3.0	3.4	V
DC Reverse Current	I _R	V _R =5V	-	-	10	μA
Domi. Wavelength*	λ _D (R)	I _F =20mA	620	625	630	nm
	λ _D (G)	I _F =20mA	520	525	530	nm
	λ _D (R)	I _F =20mA	620	625	630	nm
Luminous Intensity*	I _v (R)	I _F =20mA	750	1120	-	mcd
	I _v (G)	I _F =20mA	1120	1560	-	mcd
	I _v (R)	I _F =20mA	750	1120	-	mcd
50% Power Angle	2θ _{1/2}	I _F =20mA	-	120	-	deg

*1 Tolerance of measurements of dominant wavelength is ±1nm

*2 Tolerance of measurements of luminous intensity is ±15%


*3 Tolerance of measurements of forward voltage is ±0.1V

■Outline Dimension

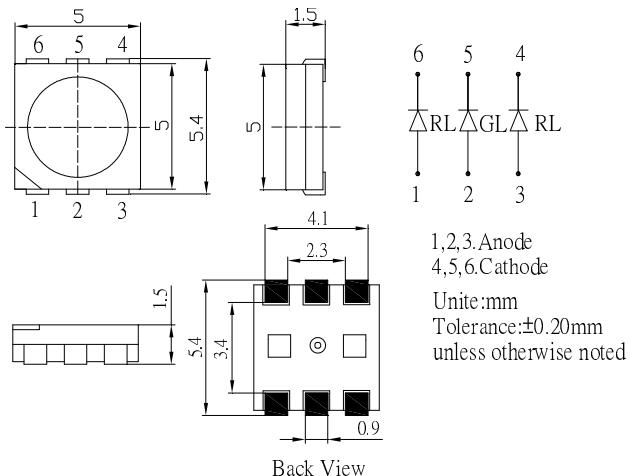

1,2,3.Anode
4,5,6.Cathode
Unit:mm
Tolerance:±0.20mm
unless otherwise noted

■Directivity

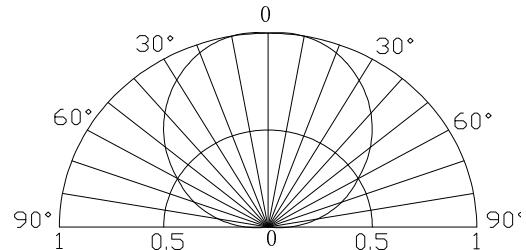

LED & Application Technologies

