

Verbatim LED "Trumpet" Downlight 220mm 20W/30W 3000K 2100lm/3200lm White

- Luminous efficacy of up to 107lm/W
- 50,000 hours lifetime (L85B10) / 70,000 hours lifetime (L80B10)
- Light output of 2100/3200lm
- 3000K warm white light
- Flicker-free
- DALI option available
- UGR<19
- 5 Years Warranty



Product Number 52939

General Data

Installation Type	Recessed
Housing material	Aluminium & PBT
Housing colour	white - RAL9003
Protection class	IP40
Dimmable	Yes with optional DALI driver

Geometric Data

Height (mm)	121
Outer diameter (mm)	220
Inner diameter (mm)	205
Weight (g)	1040

Electric Data

Wattage (W)	20/30
Voltage (V)	220-240
Current (mA)	950
Power Factor	0.9
Operating Frequency (Hz)	50/60
Safety Class	Class III
Power supply	External

Photometric Data

Luminous Flux (lm)	2100/3200
CRI	80
CCT (K)	3000
Luminous Efficacy (lm/W)	105/107
Luminous Intensity (cd)	2100/3200
Beam Angle (°)	65
UGR	17/18.4

Lifespan

Lifetime (hrs)	70,000
Switching Cycle	100,000

Mechanical Parameters


Glow wire test	850°C
----------------	-------



Product image




Technical drawing

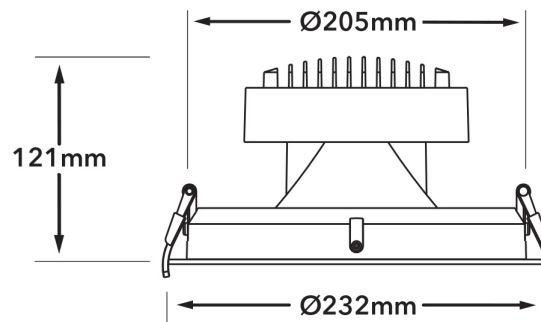


Application image




Energy Rating



This luminaire contains built-in LED lamps.





} LED

The lamps cannot be changed in the luminaire.

Verbatim 52939

874/2012

Technical Packaging Details

EAN 128
 (02)00023942529392(37)01(91)814

EAN 14
 50023942529397

Pack Dimensions(HxWxL)
 250 x 250 x 155 (mm)

MOQ
 1

Carton Dimensions (HxWxL)
 1019 x 1140 x 760 (mm)

Cartons/Pallet
 72

Layers/Pallet
 6

Units/Pallet
 72

