



YETDA INDUSTRY LTD.

5mm Blue Super Bright LED Lamps S500TB4D-H

5mm with InGaN Dice .

Encapsulated with Water Clear Package with 2 leads .

Long Leads .


Absolute Maximum Ratings : (Ta=25°C)

Parameter	Symbol	Maximum Rating	Unit
Power Dissipation	PD	100	mw
Reverse Voltage	VR	5	V
Average Forward Current	LAF	30	mA
Peak Forward Current (Duty=0.1,10KHZ)	IPF	200	mA
Operatating Temperature Range	TOPR	-20°C to +80	°C
Storage Temperature Range	TSTG	-40°C to +100	°C
Lead Soldering Temperature {1.6mm(0.063inch) From Body} 260°C For 3 Seconds			

Electro-Optical Characteristics (Ta = 25°C)

Parameter	Test Condition	Symbol	Min.	Typ.	Max.	Unit
Forward Voltage	IF = 20mA	VF		3.0	3.8	V
Reverse Current	VR =5V	IR			10	uA
Luminous Intensity	IF = 20mA	Iv	3000	5000		mcd
Wavelength	IF = 20mA	λd	465	470		nm
Viewing Angle	IF = 20mA	2θ 1/2		20		deg

Item: 500

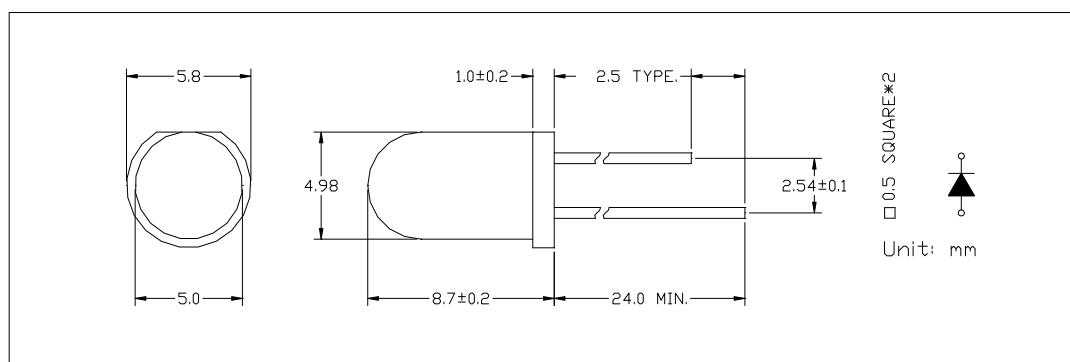

2015NOV12Y



YETDA INDUSTRY LTD.

Typical Electro-Optical Characteristics Curve:

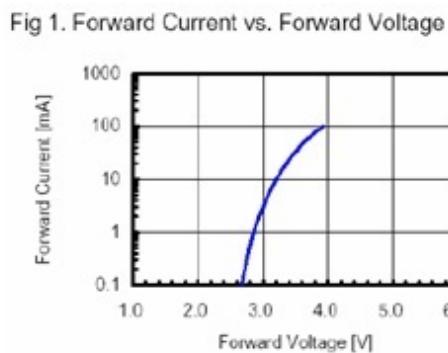


Fig 2. Relative Intensity vs. Forward Current

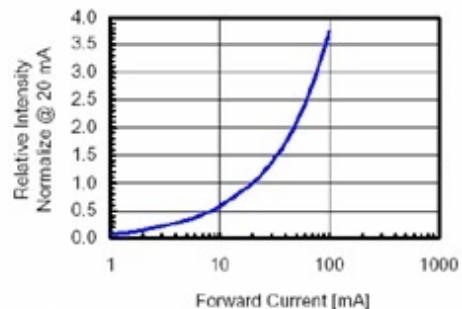


Fig 3. Forward Voltage vs. Temperature

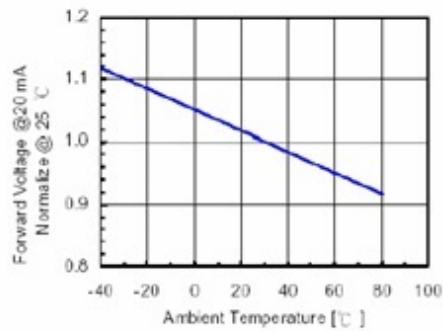


Fig 4. Relative Intensity vs. Temperature



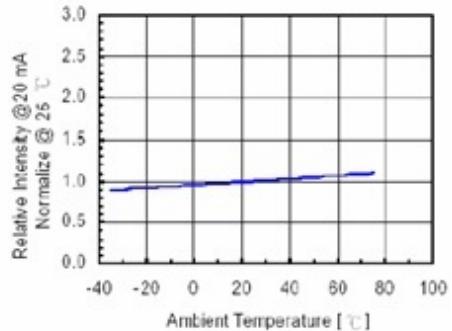


Fig 5. Relative Intensity vs. Wavelength

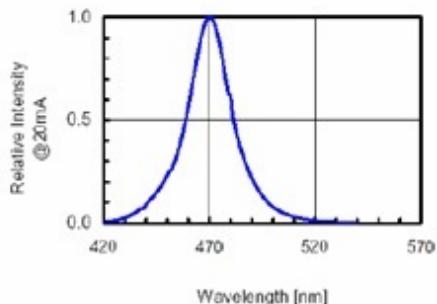



YETDA INDUSTRY LTD.

Soldering:


1. Manual of soldering

The temperature of the iron tip should not be higher than 260°C and
Soldering within 3 seconds per solder-land is to be observed

2. DIP soldering (Wave Soldering):

Preheating: 120°C ~ 150°C within 5 sec. 260°C (Max)

Gradual Cooling (Avoid quenching)

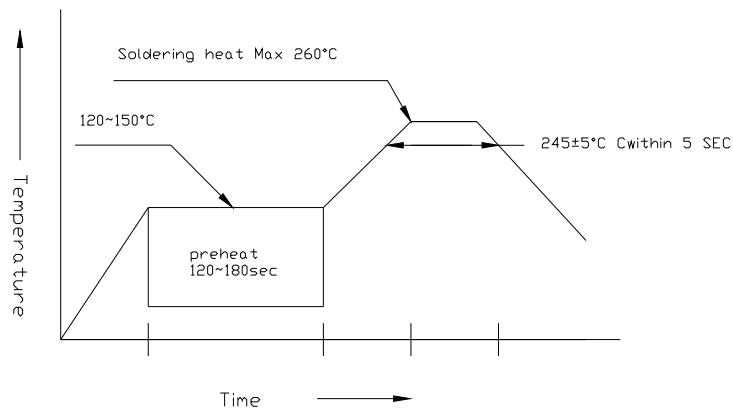

•Handling:

Care must be taken not to cause damage to the epoxy resin portion of Yetda LEDS while it is exposed to high temperature.

Care must be taken not to rub the epoxy resin portion of Yetda LEDS with hard or sharp articles such as sand blast and metal hook