

# HF3FA

# SUBMINIATURE HIGH POWER RELAY



File No.: E134517



File No.: 40023708



File No.: CQC08002027860



## Features

- 15A switching capability
- 2.5kV dielectric strength (between coil and contacts)
- Flammability class according to UL94, V-0
- CTI 250 available
- Product in accordance to IEC 60335-1 available
- 1 Form A and 1 Form C configurations
- Subminiature, standard PCB layout
- UL insulation system: Class F available
- Environmental friendly product (RoHS compliant)
- Outline Dimensions: (19.0 x 15.2 x 15.5) mm

## CONTACT DATA

Contact arrangement	1A	1C
Contact resistance	100mΩ max.(at 1A 6VDC)	
Contact material	AgSnO <sub>2</sub>	
Contact rating (Res. load)	10A 250VAC 10A 28VDC	NO: 10A 250VAC/28VDC NO/NC: 5A/5A 250VAC
Max. switching voltage	277VAC/30VDC	
Max. switching current	15A	10A
Max. switching power	2770VA / 300W	
Mechanical endurance	1 x 10 <sup>7</sup> OPS	
Electrical endurance <sup>1)</sup>	1 x 10 <sup>5</sup> OPS (NO, at 8A 250VAC) 5 x 10 <sup>4</sup> OPS (NO, at 10A 250VAC)	

## CHARACTERISTICS

Insulation resistance	100MΩ (at 500VDC)	
Dielectric strength	Between coil & contacts	2000VAC 1min
	Between open contacts	750VAC 1min
Operate time (at nomi. volt.)	10ms max.	
Release time (at nomi. volt.)	5ms max.	
Shock resistance	Functional	98m/s <sup>2</sup>
	Destructive	980m/s <sup>2</sup>
Vibration resistance	10Hz to 55Hz 1.5mm DA	
Humidity	5% to 85% RH	
Ambient temperature	-40°C to 105°C	
Termination	PCB	
Unit weight	Approx. 7.0g	
Construction	Plastic sealed, Flux proofed	

- Notes:** 1) For sealed type, the vent-hole cover should be excised.  
 2) The data shown above are initial values.  
 3) Please find coil temperature curve in the characteristic curves below.  
 4) UL insulation system: Class F, Class B.

## COIL

Coil power	Approx. 360mW
------------	---------------

## COIL DATA

at 23°C

Nominal Voltage VDC	Pick-up Voltage VDC max.	Drop-out Voltage VDC min.	Max. Allowable Voltage VDC	Coil Resistance Ω
3	2.25	0.3	3.9	25 x (1±10%)
5	3.75	0.5	6.5	70 x (1±10%)
6	4.50	0.6	7.8	100 x (1±10%)
9	6.75	0.9	11.7	225 x (1±10%)
12	9.00	1.2	15.6	400 x (1±10%)
18	13.5	1.8	23.4	900 x (1±10%)
24	18.0	2.4	31.2	1600 x (1±10%)
48	36.0	4.8	62.4	6400 x (1±10%)

## SAFETY APPROVAL RATINGS

UL/CUL	1 Form A	10A 250VAC at 85°C 8A 277VAC at 85°C 6A 250VAC at 105°C 15A 125VAC 1/2HP 125VAC/250VAC TV5 125VAC/120VAC
	1 Form C	NO/NC: 5A/5A 277VAC at 85°C
VDE	1 Form A	6A 250VAC at 105°C 10A 250VAC at 85°C
	1 Form C	NO: 10A 250VAC at 85°C NO: 6A 250VAC at 105°C NO/NC: 5A/5A 250VAC at 85°C

- Notes:** Only some typical ratings are listed above. If more details are required, please contact us.



HONGFA RELAY

ISO9001, ISO/TS16949, ISO14001, OHSAS18001, IECQ QC 080000 CERTIFIED

2012 Rev. 1.01


## ORDERING INFORMATION

Type	HF3FA / 012 -H S T F (XXX)					
Coil voltage	3, 5, 6, 9, 12, 18, 24, 48VDC					
Contact arrangement	H: 1 Form A		Z: 1 Form C			
Construction <sup>1)</sup>	S: Plastic sealed		Nil: Flux proofed			
Contact material	T: AgSnO <sub>2</sub>					
Insulation system	F: Class F		Nil: Class B			
Customer special code	e.g. (335) stands for product in accordance to IEC 60335-1 (GWT)					

**Notes:** 1) We recommend flux proofed types for a clean environment (free from contaminations like H<sub>2</sub>S, SO<sub>2</sub>, NO<sub>2</sub>, dust, etc.). We suggest to choose plastic sealed types and validate it in real application for an unclean environment (with contaminations like H<sub>2</sub>S, SO<sub>2</sub>, NO<sub>2</sub>, dust, etc).  
If water cleaning is required after the relay is assembled on PCB, please contact us for suggestion about suitable parts.

## OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT


Unit: mm

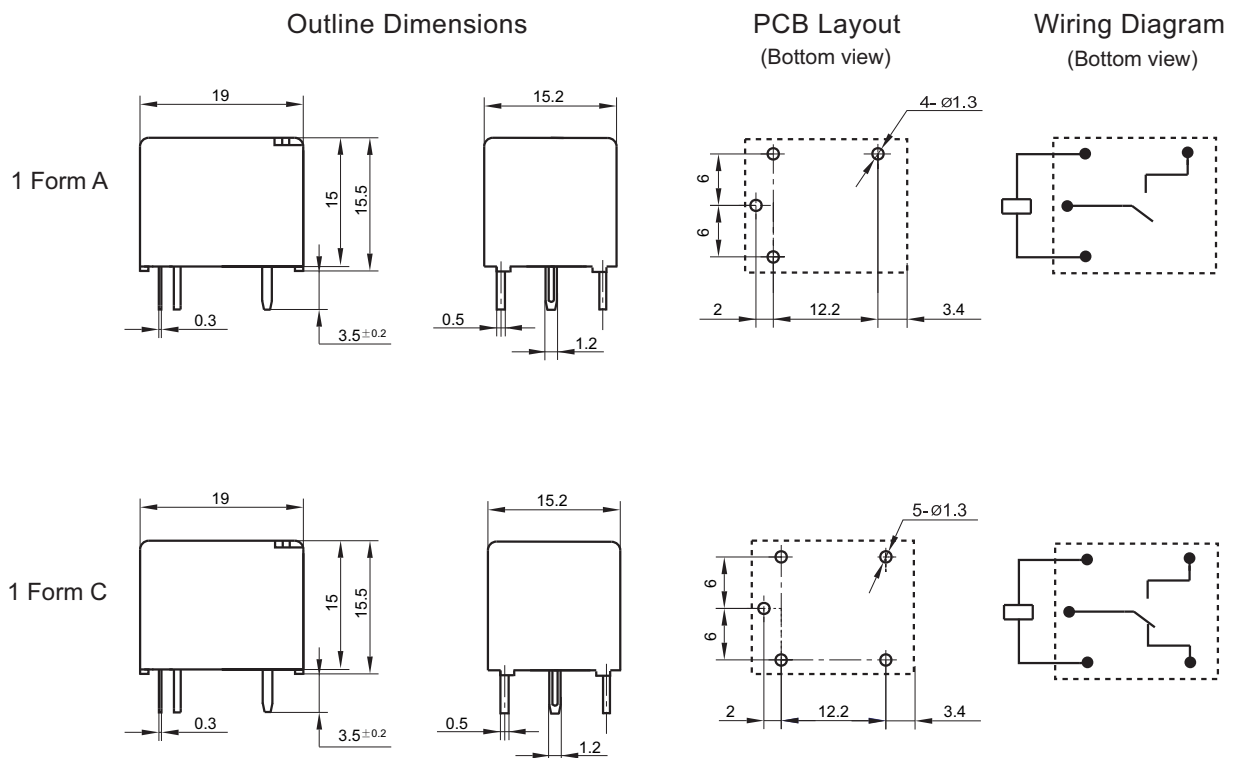


Remark: 1) In case of no tolerance shown in outline dimension: outline dimension ≤ 1mm, tolerance should be ±0.2mm; outline dimension > 1mm and ≤ 5mm, tolerance should be ±0.3mm; outline dimension > 5mm, tolerance should be ±0.4mm.  
2) The tolerance without indicating for PCB layout is always ±0.1mm.

## CHARACTERISTIC CURVES


MAXIMUM SWITCHING POWER



ENDURANCE CURVE



COIL TEMPERATURE RISE

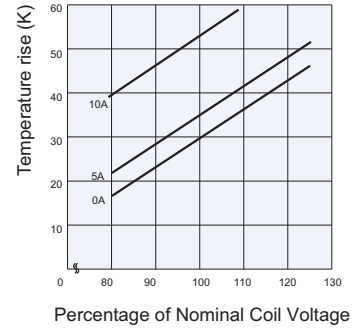

### Disclaimer

This datasheet is for the customers' reference. All the specifications are subject to change without notice.

We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.