



Dimensions and Diagram

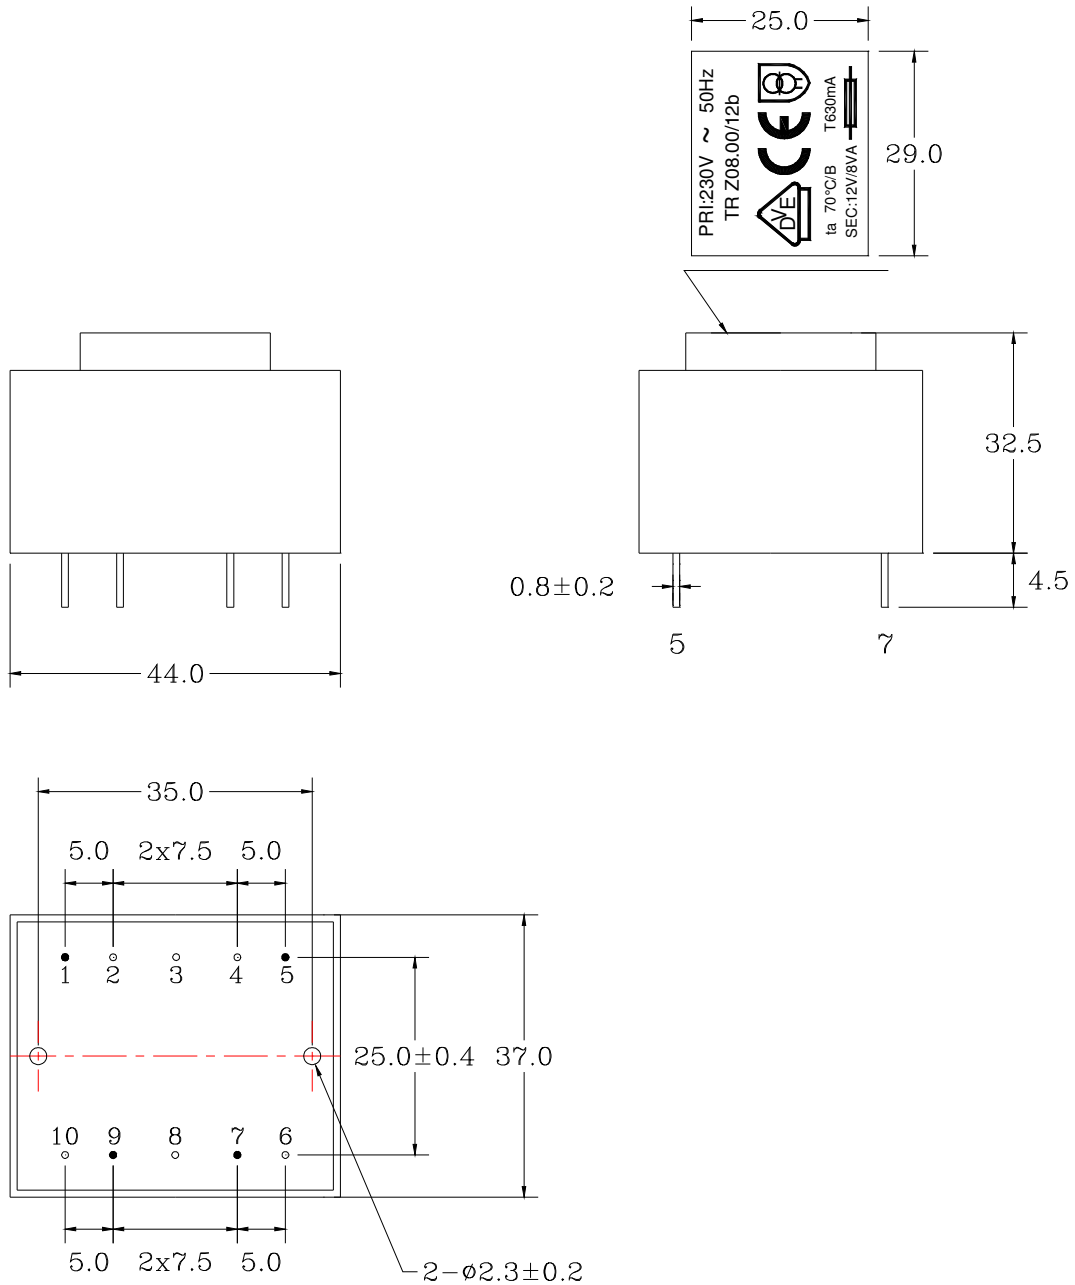

Notes:


1. Unit: mm
2. Marking: pad-print on top of case, letter in white, background in black
3. Pins exist at position: 1, 5, 7, 9.
4. The other tolerance is follows:

x.	± 1.5
.x	± 1.0
.xx	± 0.50

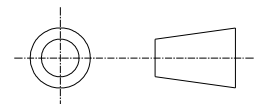

Electrical Characteristics

Circuit diagram:

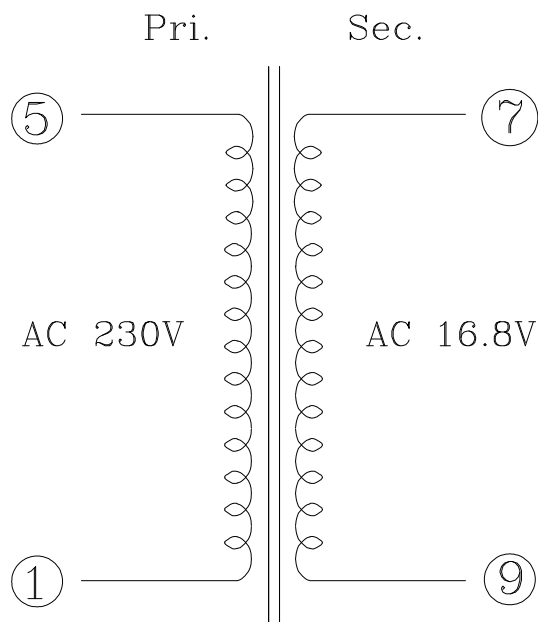

Remarks:

Non-short circuit proof type transformer on external 630mA current Fuse must be connected in series to the secondary.

Tabel-1: Secondary loaded voltage:

Primary input			S1	S2	S3	S4	S5
230Vac 50 Hz	Rated load	Load	667mA ac				
		Standard	12.0Vac				
230Vac 50Hz	1	No Load	0 A				
		Standard	16.8Vac				
253Vac 50 Hz	2	Load					
		Standard					
207Vac 50 Hz	3	Load					
		Standard					
	4	Load					
		Standard					

Tabel-1 notes:

1.If not specified, the secondary voltage tolerance is $\pm 5\%$.

Electrical Characteristics

Standard atmospheric conditions:

Unless otherwise specified, the standard range of atmospheric conditions for marking measurements and tests are as follows:

Ambient temperature : 15°C to 35°C

Relative humidity : 25% to 85%

If there is doubt about the results, measurement shall be made within the following limits:

Ambient temperature : 20°C ± 1°C

Relative humidity : 63% to 67%

Operating temperature range:

-10°C to +70°C

1	Output voltage and current	<input checked="" type="checkbox"/> Measured in a.c. circuit <input type="checkbox"/> D.C. circuit including rectifying circuit	Refer to Page 4
2	Rated primary voltage	<input checked="" type="checkbox"/> 50Hz <input type="checkbox"/> 60HZ <input type="checkbox"/> Both 50Hz and 60Hz	<u>230V</u>
3	No load current	Input <u>230Vac</u> , <u>50Hz</u>	<u>50</u> mA or less
4	Stand-by consumption	Input <u>230Vac</u> , <u>50Hz</u>	<u>----</u> W or less
5	Secondary voltage		Refer to Page 4
6	Insulation resistance	Apply a voltage of 500V d.c. for 1min.: Between the primary and core Between the primary and secondary	<u>100M</u> Ω or more
7	Dielectric strength	Between primary and secondary: <u>4.0KV</u> vac for 1min. 2mA	No damage such as Breakdown, etc.
8	Layer dielectric strength	Apply <u>(A)</u> V, 400Hz for 15s to the primary terminal of <u>(B)</u> V. (A) <u>460V</u> , (B) <u>230V</u>	No damage such as Breakdown, etc.
9	Primary direct Current resistance	Between terminals of <u>----</u> and <u>----</u>	<u>---</u> Ω
10	Secondary direct Current resistance	Between terminals of <u>----</u> and <u>----</u>	<u>---</u> Ω
11	Temperature rise	The voltage of <u>(A)</u> V shall be applied to the primary terminal of <u>(B)</u> V. Measurement shall be made after constant temperature are reached. (A) <u>243.8V</u> , (B) <u>230V</u> Secondary load conditions: <input type="checkbox"/> All at the rated current <input checked="" type="checkbox"/> The input voltage is increased by 6% after the rated current is set. <input type="checkbox"/> The rated current is set, with the input voltage 10% high. <input checked="" type="checkbox"/> Other (Ta=70°C)	Windings up to: <u>50</u> K. (by the resistance method) Iron core up to: <u>----</u> K. (by the thermometer method)

Electrical Characteristics

12	Damp heat	<p>The power transformer shall be stored at an ambient temperature of 40°C±2°C with relative humidity of 90% to 95% for 48h. Then condensation shall be removed. After which measurement shall be made within 10 min.</p>	Insulation resistance	5M Ω or more
			Dielectric strength	Clause 7 shall be satisfied. Trip current 5mA
13	Dry heat	<p>The power transformer shall be stored at an ambient temperature of 100°C±3°C for 6h. After which measurement shall be made within 10 min.</p>	Insulation resistance	5M Ω or more
			Dielectric strength	Clause 7 shall be satisfied. Trip current 5mA
14	Abnormal temperature test	<input type="checkbox"/> 15-day test <input checked="" type="checkbox"/> Short-circuit and overload test with		Windings up to: <u>175</u> °C
15	Beat noise (Hum)			<u>28</u> dB or less
16	Thermo-protector	Primary windings built in / thermal fuse.		
17	Mass			<u>210</u> g (reference)

CONSTRUCTION DIAGRAM AND MATERIAL LIST

1. Internal construction

- (1) Lead wire and winding shall be connected by twisting together.
- (2) Thickness and materials of insulation and also creepage, clearance and thickness of insulation, shall conform to applicable safety standard.

2. Tensile strength of terminals (pins)

A load of 20 N shall be applied in the axial direction. When it is retained for 10±1 seconds, there shall be no loosening or breakdown.

For one not exceeding 2 Kg, the static load same with the self weight shall be applied.


3. Appearance

There shall be no scratches, dents, or distinct blemishes on the body, pin.

5. Fitting strength

There shall be no damage such as deformation when a static load of 20 N is applied in all directions for 30 s.

Construction Diagram

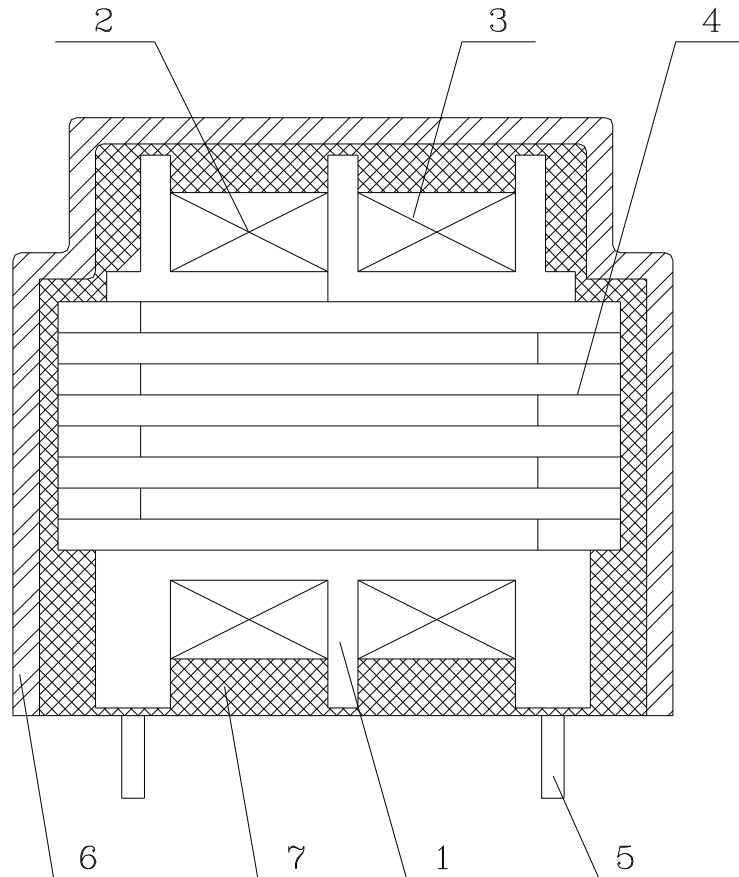

- | | |
|----------------------|---------------------|
| 1. BOBBIN | 5. PIN |
| 2. PRIMARY WINDING | 6. POTTING BOX |
| 3. SECONDARY WINDING | 7. POTTING MATERIAL |
| 4. LAMINATION CORE | |

Materials List

No.	Description	Material ,Thickness/Turns	Manufacture	Safety No.
1	Bobbin	PETP, FR530 UL94V-0	E.I. Dupont	E41938
		PET-T102G30, 0.71mm min. UL94V0	Shinkong	E107536
2	Primary Winding	Polyurethane enameled copper wire MW28C or MW75C	Ta win	E152187(S)
			Pacific-thai	E142108(S)
3	Secondary Winding	Polyurethane enameled copper wire MW28C or MW75C	Ta win	E152187(S)
			Pacific-thai	E142108(S)
4	Lamination Core	Silicon sheet steel, EI30, 0.5mm.thickness	Kawasaki	None
5	Pin	Copper alloy, 0.8mm diameter	WELL FORE	None
6	Potting Box	A216V30 , UL94HB	RHQDIA	E44716
7	Potting Material	PU390,UL94V-2	Wevo-chemie gmbh	E108835

1. All materials meet ROHS requirement.
 2. Please advise if customer have any special requirements.
 Otherwise, all materials may be substituted by other equivalent manufacturer.