


REV.	ECN.NO.	MODIFY.CONTENT	DATE
A		NEW	2016/03/05

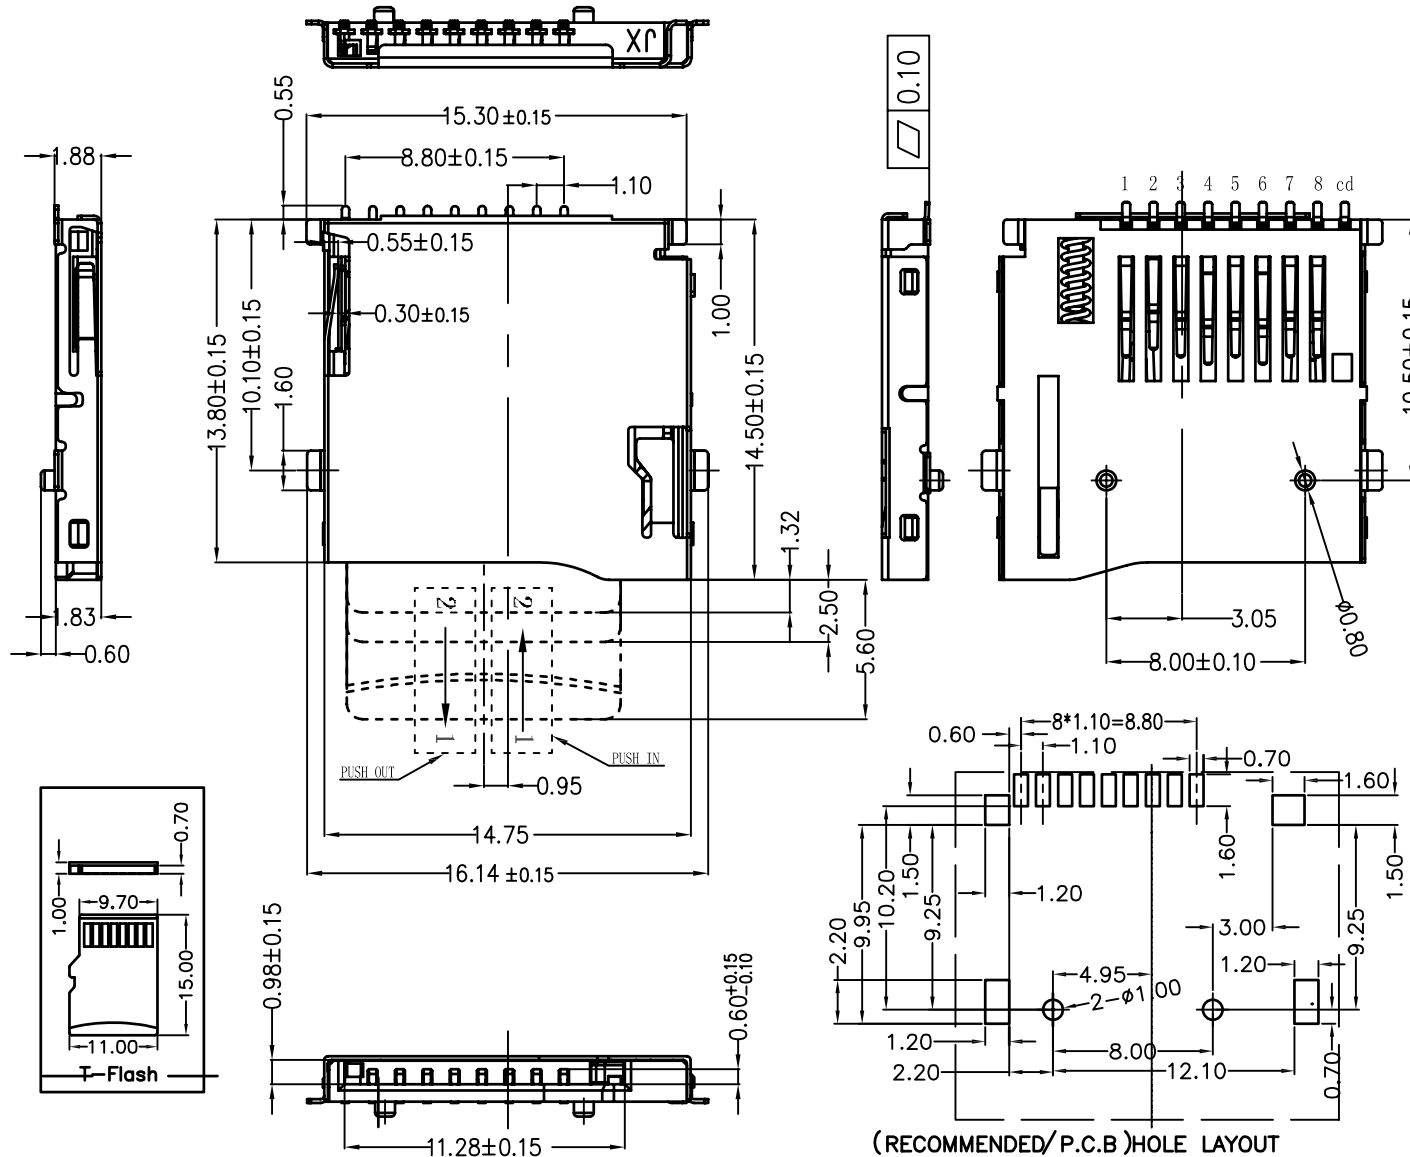

NOTES:

1.MATERIAL.

HOUSING: HIGH TEMPERATURE THERMOPLASTIC UL94V_0,COLOR:BLACK.

CONTACT: COPPER ALLOYS.

COVER: STEEL.

2.PLATING:

a.Contact:

UNDERPLATE: NICKEL.

CONTACT AREA: GOLD-PLATED
SOLDER AREA: TIN PLATING

b.Shell:


UNDERPLATE: NICKEL.

LATERAL FOOT BRUSH GOLD

3.MULTIMEDIA CARD COMPATIBLE

4.PART NO.: C-D3 09 185 A1-1



C: CARD TYPE
D3: MICRO SD CARD
09:9Pin
1: GOLD PLATED G/F
A1: SERIAL NUMBER
185: 1.85 HEIGHT

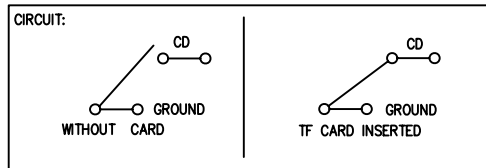

NO.	ASSIGNMENT	NO.	ASSIGNMENT
1#	DAT2	5#	CLK
2#	CD/DAT3 ²	6#	VSS
3#	CMD	7#	DATO
4#	VDD	8#	DAT1

GENERAL TOLERANCE		DWG NO.	LZA1603-001KN	APPD:	Achilles	Scale	1:1
X.±0.45	x.'±5'	Title	PUSH T-FLASH CARD 1.85H 外焊 短平齐型CONN	CHKD:		UNIT	mm
.X±0.35	.x'±2'			DR:			
.XX±0.25	.xx'±1'	Part NO.	ATFFS185A01BR037	Date	2016/03/05		
.XXX±0.15	.xxx'±0.5'	东莞市捷圣泰电子科技有限公司 Dongguan JASSTA Electronics Co.,Ltd.					
SHEET	1/1						

REV.	ECN.NO.	MODIFY.CONTENT	DATE
A		NEW	2012/04/13

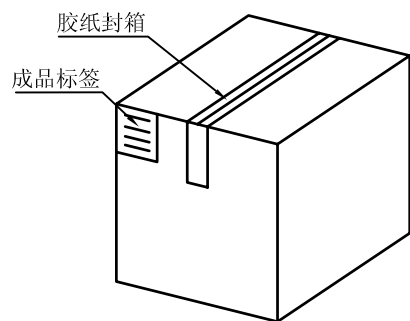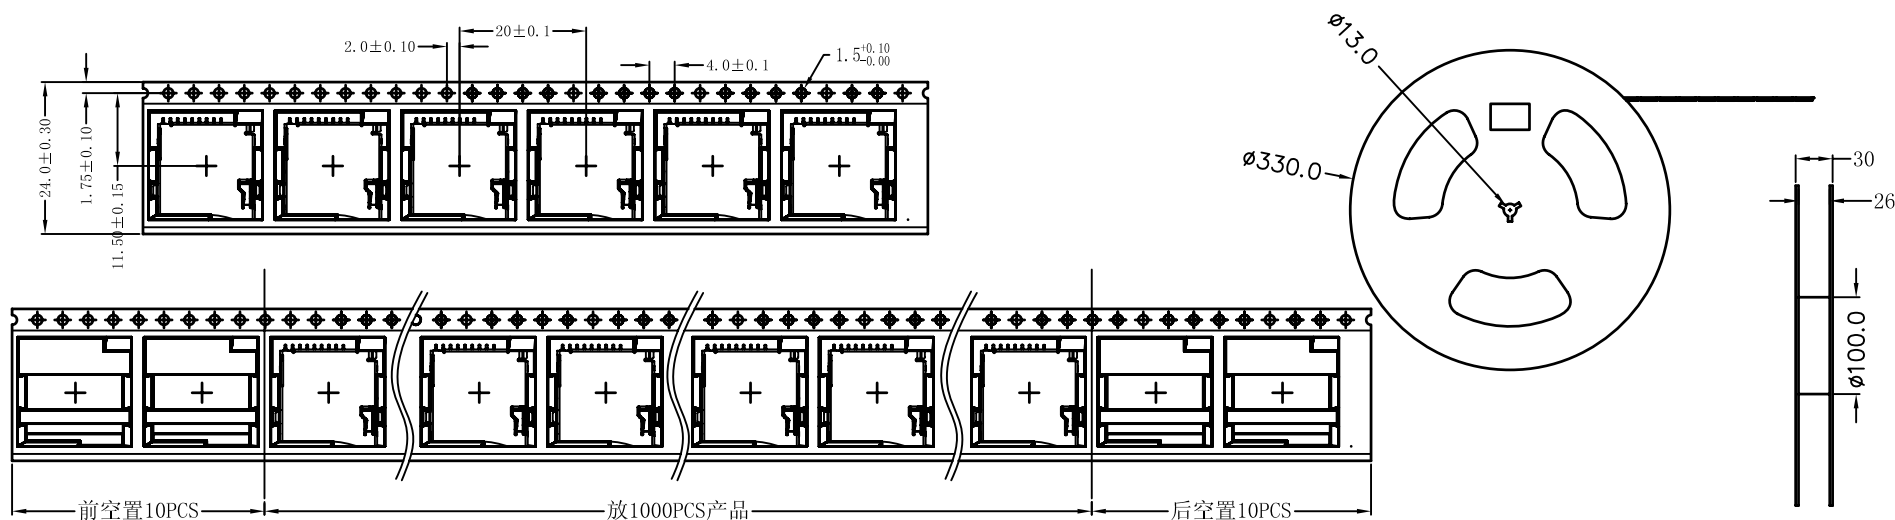

纸箱规格: 345*345*310



包装方式:

- 1 将卷带放入包装机后, 前空10PCS, 后放产品1000PCS, 再后空10PCS;
- 2 将包装好的产品从包装机上取下, 用美纹胶纸封口, 再使用封口透明带缠绕其一圈后用美纹胶纸封口;
- 3 把累叠好的10盘叠放入纸箱中共计10Kset;
- 4 把包装好的成品打包封箱, 并在纸箱外贴上标签

GENERAL TOLERANCE		DWG NO.	LZA1603-001KN	APPD:	Kun	Scale	1:1
X.±0.45	x.'±5'	Title	PUSH T-FLASH CARD 1.85H 外焊 短平齐型 CONN (包装图)	CHKD:		UNIT	mm
.X±0.35	.x'±2'			DR:			
.XX±0.25	.xx'±1'	Part NO.	ATFFS185A01BR037	Date	2014/05/13		
.XXX±0.15	.xxx'±0.5'	东莞市捷圣泰电子科技有限公司 Dongguan JASSTA Electronics Co.,Ltd.					
SHEET	1/1						