
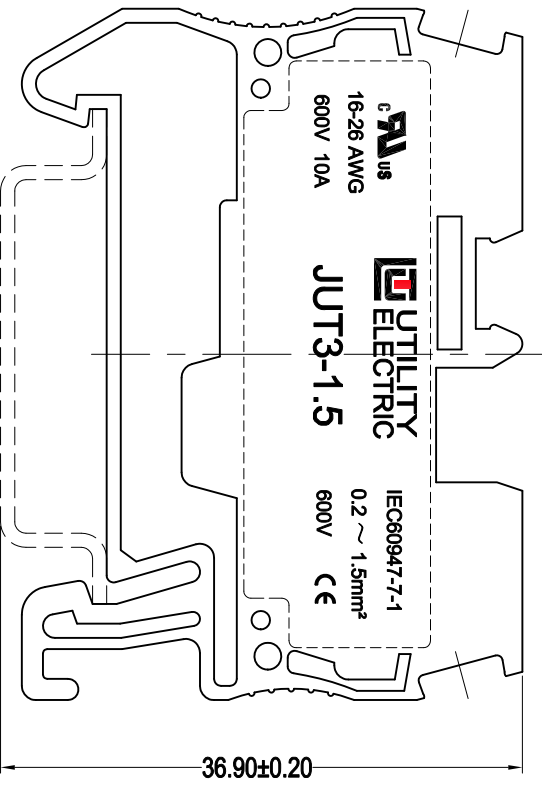
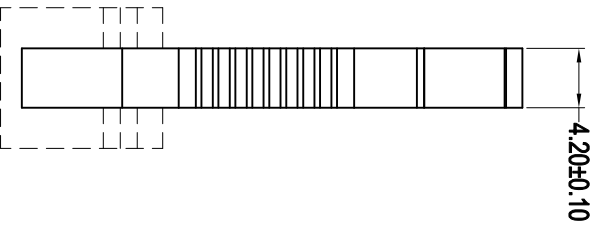


REV.	EQM.NO.	REVISE.NO.	REVISED	APPD.
版本	物料编号	版本号	修订者	核准
R1	DRAWING			

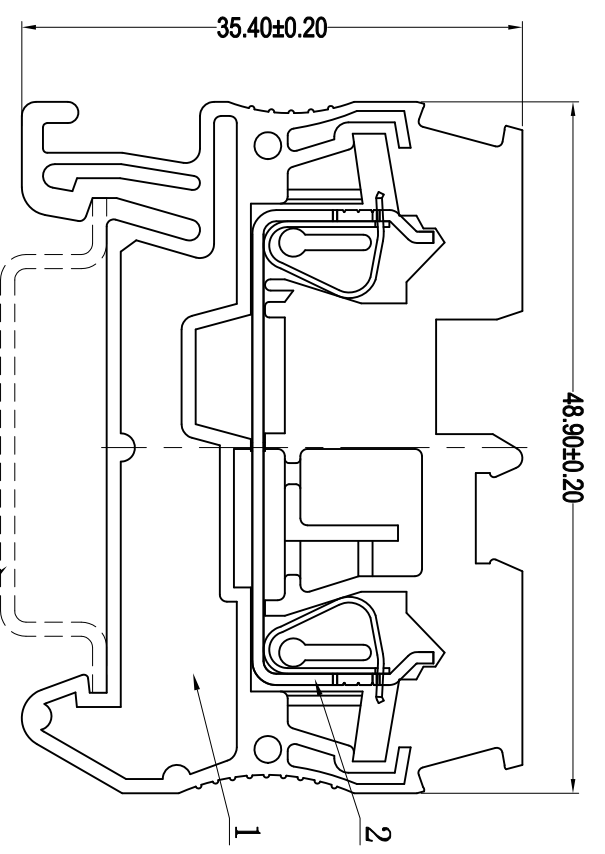

### Technical Data

Material:

Body: PA66 UL94 V-0.

Conductor: Copper, Tin Plated.

Spring: SUS 301.

Electrical:

Voltage rating/Current rating: IEC 500V/17.5 A;  
UL 600V/15 A

Contact resistance: 20 mΩ Max.

Insulation resistance: 500V, 500 MΩ Min.


Withstanding Voltage: AC 2500 V, 1 minute.

Mechanical:

Connection Capacity: 24-16AWG.

Stripping Length: 10mm.

Operating temperature: -45° C to +105° C.

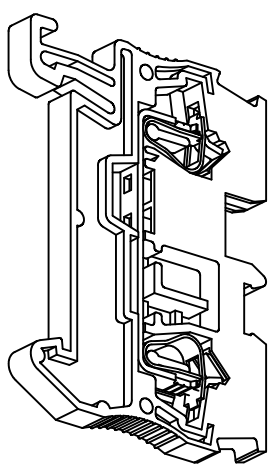

ZHEJIANG UTILITY ELECTRICAL CO., LTD  
浙江尤提乐电气有限公司

TYPE NO.		TITLE	
>120	±0.50	型号:	JUT3-1.5
>30~120	±0.30	名称:	Customer Drawing
>6~30	±0.20	图号:	C-DW0252-0
0~6	±0.10	审核:	
MATL	材料:	SCALE:	FULL
		比例:	
		PAGE:	1/1
		页码:	
		REV.:	R1
		版本:	
		DR.:	Jammy.ling
		设计:	
		UNIT:	mm[inch]
		单位:	