
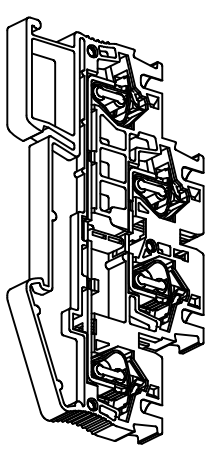
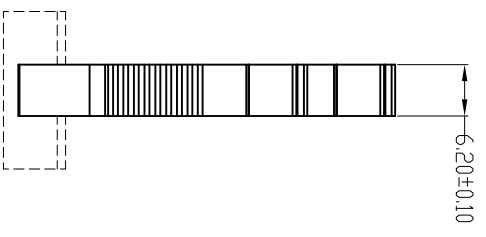
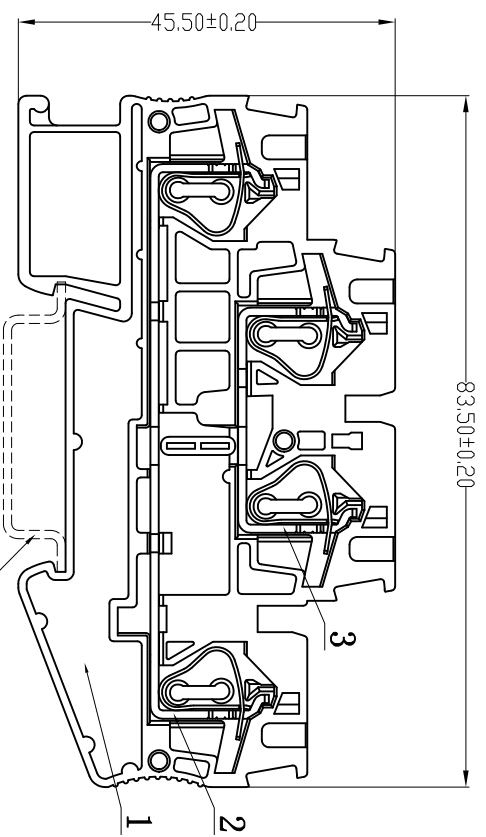


REV.	EQM.NO.	REUSE.NO.	REVISER	APPD.
版本	EQM. 编号	复用 次数	修订者	核准
R1	DRAWING			

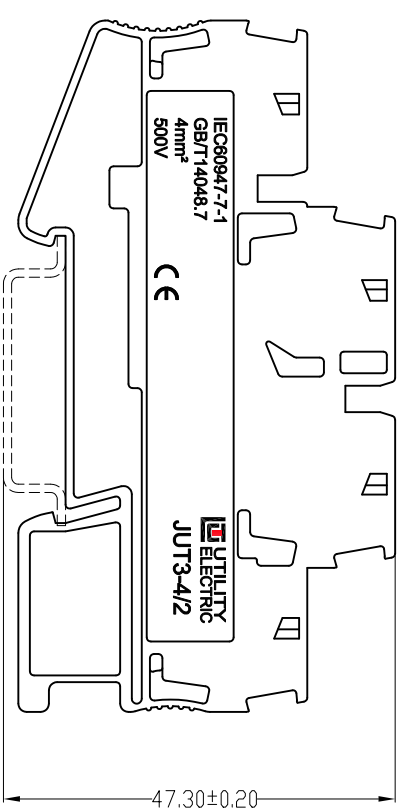

Technical Data

Material:
 Body: PA66 UL94 V-0.
 Conductor: Copper, Tin Plated.
 Spring: SUS 301.

Electrical:
 Voltage rating/Current rating: IEC 800V/32 A;
 UL 600V/30 A

Contact resistance: 20 mΩ Max.
Insulation resistance: 500V, 500 MΩ Min.
Withstanding Voltage: AC 3000 V, 1 minute.

Mechanical:
Connection Capacity: 24-12AWG.
Stripping Length: 12mm.
Operating temperature: -45° C to +105° C.



ZHEJIANG UTILITY ELECTRICAL CO., LTD
 浙江尤提乐电气有限公司

TYPE NO.	TITLE	DR.	UNIT:	REV.:
JUT3-4/2	名称: Customer Drawing	Jammy. ling	mm[inch]	R1
型号:	图号:	审核:	比例:	页码:
>120	±0.50	APPD.	SCALE: FULL	PAGE: 1/1
>30~120	±0.30	CHKD.	比例:	页码:
>6~30	±0.20	DR.	UNIT: mm[inch]	REV.: R1
0~6	±0.10	设计:		
ANGLE ±1°				
MATERIAL				
材质:				