
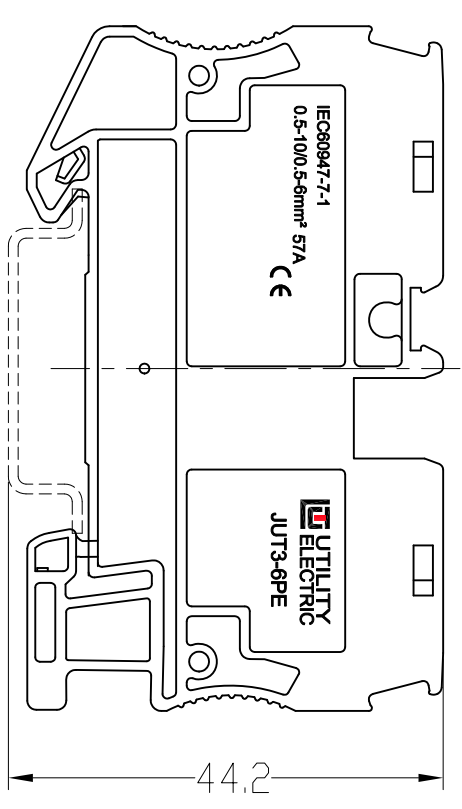


REV.	REV. NO.	REVISER	APP'D.
版本	版本号	修订者	核准
R1	DRAWING		

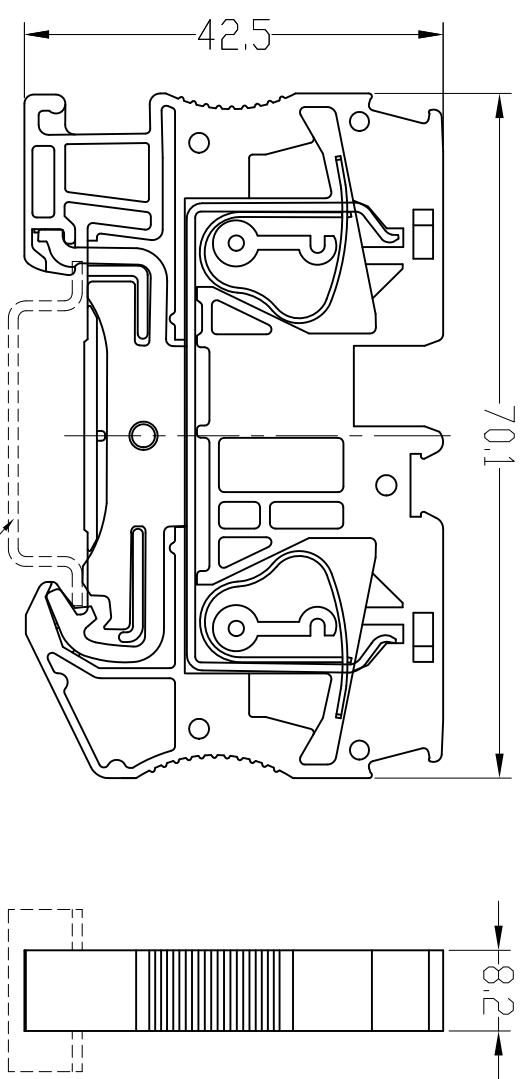

### Technical Data

**Material:**  
 Body: PA66 UL94 V-0.  
 Conductor: Copper, Tin Plated.  
 Spring: SUS 301.

**Electrical:**  
 Current rating: IEC 57 A;  
 Contact resistance: 20 mΩ Max.

**Mechanical:**  
 Connection Capacity: 24-10AWG.  
 Stripping Length: 12mm.  
 Operating temperature: -45° C to +105° C.



**ZHEJIANG UTILITY ELECTRICAL CO., LTD**  
**浙江尤提乐电气有限公司**

TYPE NO.	TITLE	SCALE	PAGE
JUT3-6PE	Customer Drawing	FULL	1/1
型号:	名称:	图号:	页码:
JUT3-6PE	Customer Drawing	C-DW0275-0	1/1
APPD.	DWG. NO.:	SCALE:	PAGE:
核准:	图号:	比例:	页码:
JUT3-6PE	C-DW0275-0	FULL	1/1
CHKD.	UNIT:	REV.:	
审核:	单位:	版本:	
JUT3-6PE	mm	R1	
DR.			
设计:			
Jammy. ling			

MATL	尺寸	公差	角度
>120	±0.80		
>30~120	±0.50		
>6~30	±0.30		
0~6	±0.20		±1.5°



DR. 设计: Jammy. ling

UNIT: mm  
 REV.: R1