
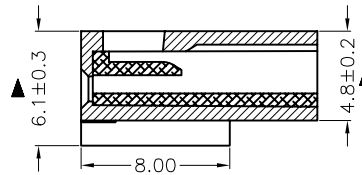
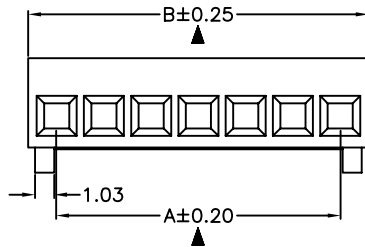
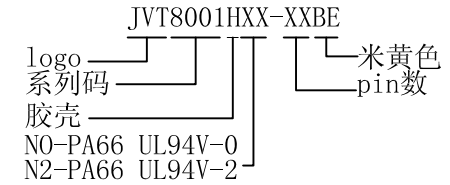


ROHS compliant

■ SPECIFICATION


- Poles: 02-20
- Voltage rating: 250V AC, DC
- Current Rating: 3A, AC, DC
- Withstand voltage: 1000V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25°C ~ +85°C
- Control the size: "▲"

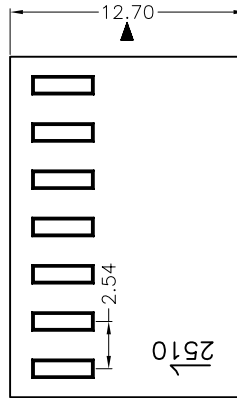

NOTES:
 2-9PIN: C±0.25
 10-20PIN: C±0.30

Poles	Dim(mm)		
	A	B	C
2	2.54	5.68	2.65
3	5.08	8.22	5.19
4	7.62	10.76	7.73
5	10.16	13.30	10.27
6	12.70	15.84	12.81
7	15.24	18.38	15.35
8	17.78	20.92	17.89
9	20.32	23.46	20.43
10	22.86	26.00	22.97
11	25.40	28.54	25.51

Poles	Dim(mm)		
	A	B	C
12	27.94	31.08	28.05
13	30.48	33.62	30.59
14	33.02	36.16	33.13
15	35.56	38.70	35.67
16	38.10	41.24	38.21
17	40.64	43.78	40.75
18	43.18	46.32	43.29
19	45.72	48.86	45.83
20	48.26	51.40	48.37



GENERAL TOLERANCE	
0	±0.40
.0	±0.30
.00	±0.20
.000	±0.10

变更料号		20130505	乔业电子有限公司 CHYAO YEE CONNECTORS CO.,L TD		核准	审核	设计	品名	MOLEX2510 HOUSING					
变更内容		日期	单位	mm	比例	1:1	日期	201208027	陈宁亮	李勇军	料号	JVT8001HNO-XXBE		
											图名	031	版本	B

核准		审核		设计		品名		MOLEX2510 HOUSING		
		陈宁亮		李勇军		料号		JVT8001HNO-XXBE		
						图名		031	版本	B