

1 2 3 4 5 6 7 8

A

A

B

B

C

C

D

D

E

E

F

F

G

G

H

H

**SPECIFICATION**

**ELECTRIC**

Current Rating: 3A AC DC

Voltage Rating: 250V AC. Maximum.

Temperature range: -55C ~ +105C.

Contact Resistance: Initial Value/10m Ohms Max.


After Environmental Testing/20m Ohms Max.

Insulation Resistance: 1000M Ohms Min.

Withstanding Voltage: 1500V AC/Minute.

**MATERIAL**

Housing: PBT +30% Glass Fiber UL94V-0

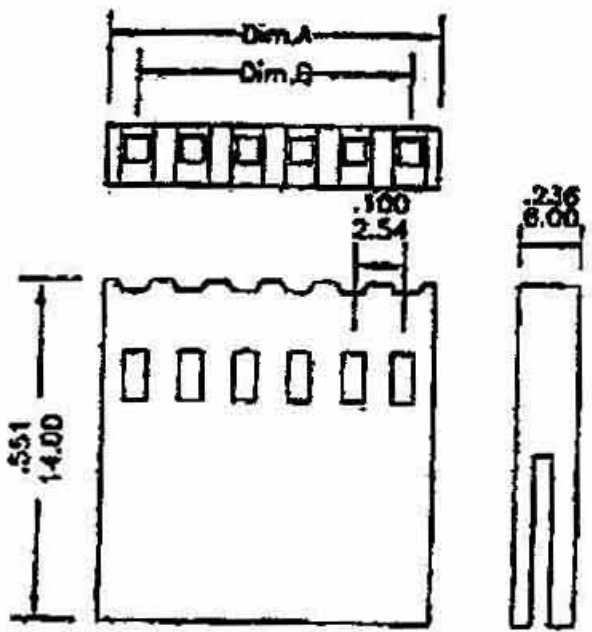

POLES	DIM.		POLES	DIM.	
	A	B		A	B
2	5.08	2.54	14	35.56	33.02
3	7.62	5.08	15	38.10	35.56
4	10.16	7.62	16	40.64	38.10
5	12.70	10.16	17	43.18	40.64
6	15.24	12.70	18	45.72	43.18
7	17.78	15.24	19	48.26	45.72
8	20.32	17.78	20	50.80	48.26
9	22.86	20.32	21	53.34	50.80
10	25.40	22.86	22	55.88	53.34
11	27.94	25.40	23	58.42	55.88
12	30.48	27.94	24	60.96	58.42
13	33.02	30.48	25	63.50	60.96

			UNIT		SCALE		PART NAME	
			MM					
DRAWING.		APPROVED	APPD.	CKD.	TOLERANCE		PART NO.	
					± 0.3			

1 2 3 4 5 6 7 8