
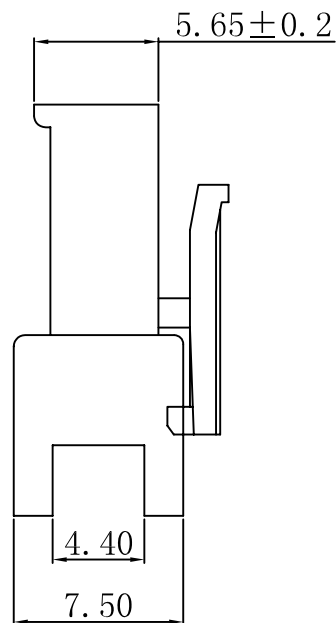
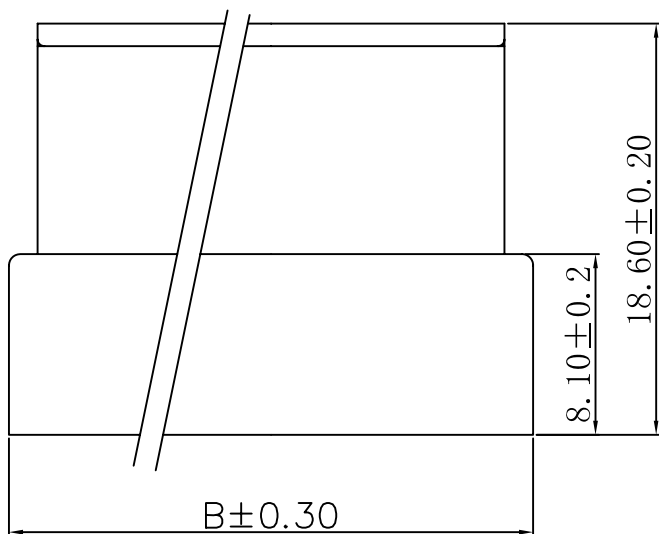


RoHS

REVISION DATE		
ITEM	DESCRIPTION	
A.0	Issue	2013 07 17

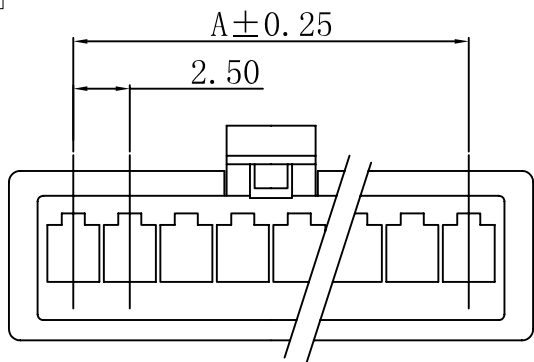


■ SPECIFICATIONS

- Voltage rating: 250V AC/DC
- Current rating: 3.0A AC/DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 500mΩ Min.
- Temperature range: -25°C - +85°C
- Contact resistance: 10mΩ Max.

■ HOUSING

- Part No.: JVT6504HNO-XX
- Poles: 02-12
- Material: PA66 UL94V-0
- Q'ty: 1000PCS/Bag

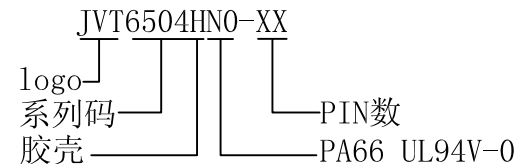

Poles	Dimension (mm)		Poles	Dimension (mm)	
	A	B		A	B
02	2.5	8.1	08	17.5	23.1
03	5.0	10.6	09	20.0	25.6
04	7.5	13.1	10	22.5	28.1
05	10.0	15.6	11	25.0	30.6
06	12.5	18.1	12	27.5	33.1
07	15.0	20.6			

投影 (PROJECT)		公差 (TOLERANCE)
单位 (UNIT)	mm	0 ±0.40
比例 (SCALE)	1:1	0.0 ±0.30
版本 (EDITION)	A.0	0.00 ±0.20
日期 (DATE)	2013 07 17	0.000 ±0.05

东莞市乔业电子有限公司  
DONG GUAN CHYAO YEE (JVT) CONNECTORS CO., LTD.

绘图 (DRAWN)	YongJUN	品号 (PART NO)	JVT6504HNO-XX	页次 (PAGE)	
审核 (CHECKED)		图号 (DRAW NO)	048-6504-01	1/1	
核准 (APPROVE)		品名 (NAME)	SMR 2.50mm Female HSG		