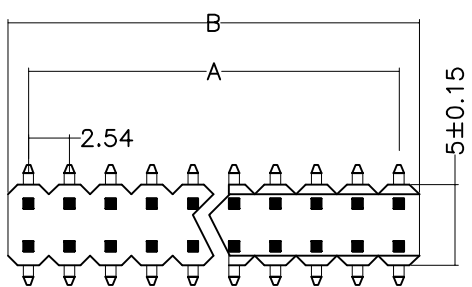
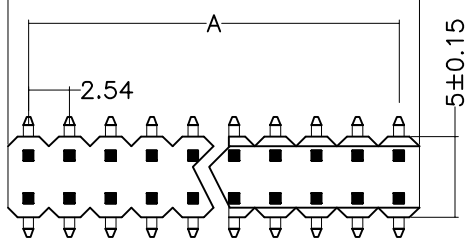
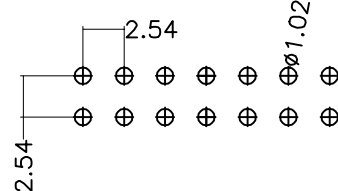
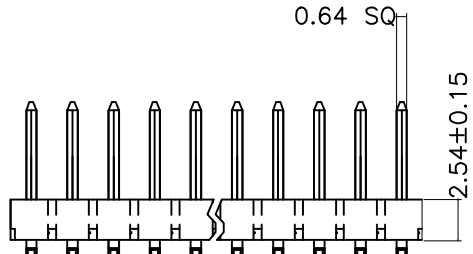




	1	2	3	4	5	6	7	8	9																																																																																																																																																												
G						<p>SPECIFICATIONS Current Rating:3Amps Insulation Resistance:1000MΩ min Withstanding Voltage: 1000VAC Contact Resistance:20mΩ max Operating Temperture:-40° C to+105° C Standard:PBT Contact Material:Brass Contact Plating:Au or Sn Over Ni Max. Processing Temp:180°Cfor30-60second (200°Cfor10second)</p>																																																																																																																																																															
F																																																																																																																																																																					
E						<p>Code Description CH-254-PH-2-XX-254-M-GO-A</p> <p>(1) (2) (3) (4) (5) (6) (7) (8)</p> <p>(1) Pin Spacing: 254=2.54mm (2) Product Name:PH=Pin Header (3) No. of Rows:1=Single 2=Dual Row (4) No. of Pins Per Row:1-40 (5) Insulator Material Height:15=1.5mm;20=2.0mm;25=2.5mm (6) ContactType:S=Straight;R=Right/Angle;M=SMT (7) Contact Plating:SN=Tin;GO=Gold Flash;SO=Gold Flash/Tin (8) Insulator Material Option: A=BK-PBT;B=BK-PA6T;C=BK-PA46;D=BK-LCP;S=Special</p>																																																																																																																																																															
D																																																																																																																																																																					
C																																																																																																																																																																					
B	<p>UNLESS OTHEWIXE SPECIFIED TOLERANCE</p> <table border="1"> <tr> <td>X</td> <td>:±0.3</td> <td>X°</td> <td>:±5°</td> </tr> <tr> <td>X.X</td> <td>:±0.2</td> <td>X.X°</td> <td>:±1°</td> </tr> <tr> <td>X.XX</td> <td>:±0.2</td> <td>X.XX°</td> <td>:±0.5°</td> </tr> </table> <p>DRAWN NAME: CH-254-PH-2-XX-254-M-GO-B</p> <table border="1"> <tr> <td>SIZE</td> <td>A4</td> <td>SCALE</td> <td>N:1</td> <td>PROUCT</td> <td></td> </tr> <tr> <td>REV</td> <td>A</td> <td>UNIT</td> <td>mm</td> <td>PROJECT</td> <td>⊕ ≡ PAGE 1/1</td> </tr> </table>					X	:±0.3	X°	:±5°	X.X	:±0.2	X.X°	:±1°	X.XX	:±0.2	X.XX°	:±0.5°	SIZE	A4	SCALE	N:1	PROUCT		REV	A	UNIT	mm	PROJECT	⊕ ≡ PAGE 1/1	<table border="1"> <thead> <tr> <th>No. of</th> <th>DIN. A</th> <th>DIN. B</th> <th>No. of</th> <th>DIN. A</th> <th>DIN. B</th> <th>No. of</th> <th>DIN. A</th> <th>DIN. B</th> <th>No. of</th> <th>DIN. A</th> <th>DIN. B</th> </tr> </thead> <tbody> <tr><td>1</td><td>0.00</td><td>2.54</td><td>11</td><td>25.40</td><td>27.94</td><td>21</td><td>50.80</td><td>53.35</td><td>31</td><td>76.20</td><td>78.74</td></tr> <tr><td>2</td><td>2.54</td><td>5.08</td><td>12</td><td>27.94</td><td>30.48</td><td>22</td><td>53.35</td><td>55.89</td><td>32</td><td>78.74</td><td>81.28</td></tr> <tr><td>3</td><td>5.08</td><td>7.62</td><td>13</td><td>30.48</td><td>33.02</td><td>23</td><td>55.89</td><td>58.42</td><td>33</td><td>81.28</td><td>83.82</td></tr> <tr><td>4</td><td>7.62</td><td>10.16</td><td>14</td><td>33.02</td><td>35.56</td><td>24</td><td>58.42</td><td>60.96</td><td>34</td><td>83.82</td><td>86.36</td></tr> <tr><td>5</td><td>10.16</td><td>12.70</td><td>15</td><td>35.56</td><td>38.10</td><td>25</td><td>60.96</td><td>63.50</td><td>35</td><td>86.36</td><td>88.90</td></tr> <tr><td>6</td><td>12.70</td><td>15.24</td><td>16</td><td>38.10</td><td>40.64</td><td>26</td><td>63.50</td><td>66.04</td><td>36</td><td>88.90</td><td>91.44</td></tr> <tr><td>7</td><td>15.24</td><td>17.78</td><td>17</td><td>40.64</td><td>43.18</td><td>27</td><td>66.04</td><td>68.58</td><td>37</td><td>91.44</td><td>93.98</td></tr> <tr><td>8</td><td>17.78</td><td>20.32</td><td>18</td><td>43.18</td><td>45.72</td><td>28</td><td>68.58</td><td>71.12</td><td>38</td><td>93.98</td><td>96.62</td></tr> <tr><td>9</td><td>20.32</td><td>22.86</td><td>19</td><td>45.72</td><td>48.26</td><td>29</td><td>71.12</td><td>73.66</td><td>39</td><td>96.62</td><td>99.06</td></tr> <tr><td>10</td><td>22.86</td><td>25.40</td><td>20</td><td>48.26</td><td>50.80</td><td>30</td><td>73.66</td><td>76.20</td><td>40</td><td>99.06</td><td>101.6</td></tr> </tbody> </table>				No. of	DIN. A	DIN. B	No. of	DIN. A	DIN. B	No. of	DIN. A	DIN. B	No. of	DIN. A	DIN. B	1	0.00	2.54	11	25.40	27.94	21	50.80	53.35	31	76.20	78.74	2	2.54	5.08	12	27.94	30.48	22	53.35	55.89	32	78.74	81.28	3	5.08	7.62	13	30.48	33.02	23	55.89	58.42	33	81.28	83.82	4	7.62	10.16	14	33.02	35.56	24	58.42	60.96	34	83.82	86.36	5	10.16	12.70	15	35.56	38.10	25	60.96	63.50	35	86.36	88.90	6	12.70	15.24	16	38.10	40.64	26	63.50	66.04	36	88.90	91.44	7	15.24	17.78	17	40.64	43.18	27	66.04	68.58	37	91.44	93.98	8	17.78	20.32	18	43.18	45.72	28	68.58	71.12	38	93.98	96.62	9	20.32	22.86	19	45.72	48.26	29	71.12	73.66	39	96.62	99.06	10	22.86	25.40	20	48.26	50.80	30	73.66	76.20	40	99.06	101.6
X	:±0.3	X°	:±5°																																																																																																																																																																		
X.X	:±0.2	X.X°	:±1°																																																																																																																																																																		
X.XX	:±0.2	X.XX°	:±0.5°																																																																																																																																																																		
SIZE	A4	SCALE	N:1	PROUCT																																																																																																																																																																	
REV	A	UNIT	mm	PROJECT	⊕ ≡ PAGE 1/1																																																																																																																																																																
No. of	DIN. A	DIN. B	No. of	DIN. A	DIN. B	No. of	DIN. A	DIN. B	No. of	DIN. A	DIN. B																																																																																																																																																										
1	0.00	2.54	11	25.40	27.94	21	50.80	53.35	31	76.20	78.74																																																																																																																																																										
2	2.54	5.08	12	27.94	30.48	22	53.35	55.89	32	78.74	81.28																																																																																																																																																										
3	5.08	7.62	13	30.48	33.02	23	55.89	58.42	33	81.28	83.82																																																																																																																																																										
4	7.62	10.16	14	33.02	35.56	24	58.42	60.96	34	83.82	86.36																																																																																																																																																										
5	10.16	12.70	15	35.56	38.10	25	60.96	63.50	35	86.36	88.90																																																																																																																																																										
6	12.70	15.24	16	38.10	40.64	26	63.50	66.04	36	88.90	91.44																																																																																																																																																										
7	15.24	17.78	17	40.64	43.18	27	66.04	68.58	37	91.44	93.98																																																																																																																																																										
8	17.78	20.32	18	43.18	45.72	28	68.58	71.12	38	93.98	96.62																																																																																																																																																										
9	20.32	22.86	19	45.72	48.26	29	71.12	73.66	39	96.62	99.06																																																																																																																																																										
10	22.86	25.40	20	48.26	50.80	30	73.66	76.20	40	99.06	101.6																																																																																																																																																										
A	<table border="1"> <tr> <td>CHECKED</td> <td>LIU SHENG HUI</td> <td>DATE</td> <td>05/28</td> <td>CHECKED</td> <td></td> <td>DATE</td> <td>/</td> </tr> </table>					CHECKED	LIU SHENG HUI	DATE	05/28	CHECKED		DATE	/																																																																																																																																																								
CHECKED	LIU SHENG HUI	DATE	05/28	CHECKED		DATE	/																																																																																																																																																														
	1	2	3	4	5	6	7	8	9																																																																																																																																																												