




ELECTRICAL:
 Current Rating: 1AMP.
 Insulation Resistance: 1000MΩ MIN.
 Contact Resistance: 20MΩ Max.
 Dielectric Withstanding: 500VAC
 Operation Temperature: -40°C~+85°C

MATERIALS:
 Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-6T
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Phosphor Bronze
 Finish: Gold Plated or Duplex Plated
 Standard: Gold Flash all over

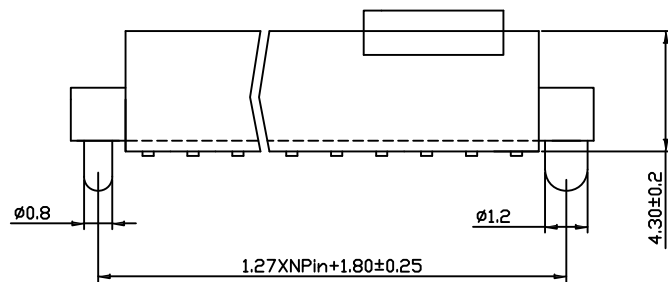

JVT1270H436T-2*XXPC-S
 胶壳高度4.3mm
 6T-PA6T
 SMT
 C-带盖子
 P-带柱子
 单排PIN数

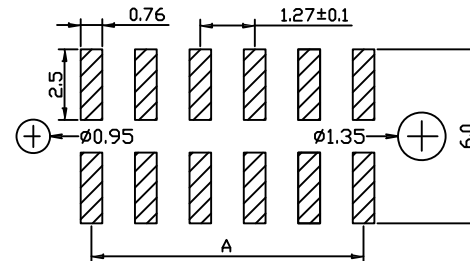

Recommended P.C.B Hole Layout

GENERAL TOLERANCE	
0	±0.35
.0	±0.30
.00	±0.20
.000	±0.10

版本	变更内容	日期	单位	mm	比例	1:1	日期	20140331
----	------	----	----	----	----	-----	----	----------



核准	审核	绘图	品名	1.27双排排母H4.3mm 带柱带盖 SMT		
	CHEN	李勇军	料号	JVT1270H436T-2*XXPC-S		
			图名	004	版本	A