

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 06/29/06'		

NOTES:


1. ELECTRICAL CHARACTERISTICS:
 - 1.1 CONTACT RESISTANCE: 20mΩ Max.
 - 1.2 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - 1.3 INSULATION RESISTANCE: 1000MΩ Min.
2. ENVIRONMENT CHARACTERISTICS:
 - 2.1 TEMPERATURE: -40°C~+105°C.
3. PRODUCT NUMBER CODE:

DS1004-02 - X X X

HOUSING COLOR
B: Black

CONTACT PLATING
1: Tin 150u''
2: Tin 200u''
3: G/F
4: Gold 3u''
5: Gold 10u''
6: Gold 15u''

No.OF CONTACTS
1*1 - 1*40
2*1 - 2*40
SERIES No.
DS1004-02

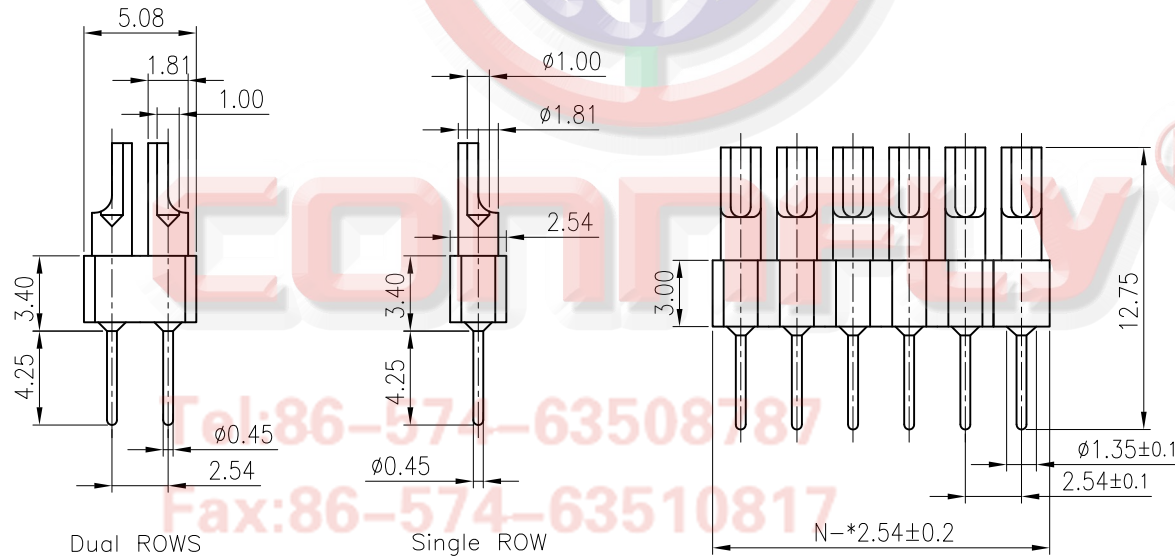

Tel:86-574-63508787

Fax:86-574-63510817

E-mail:sale@connfly.com

http://www.connfly.com

Add:East Industry Zone KuangYan

Town Cixi Ningbo China

P.C:315333

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	PCB HEADER STRIPS PITCH 2.54mm
X.	±0.60	X.	±5'	UNITS	mm		SOLDER TYPE
.X	±0.38	.X	±3'	SHEET SIZE	A4	SERIES	DS1004-02 SERIES
.XX	±0.25	.XX	±2'	晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
DRAWING TYPE		CUSTOMER					
SCALE		1:1 SHEET 10F1					
DRAWING NO.		C-DS1004-02-XXX					