

REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

NOTES1:

- 1. UL Standard
- 1. Rated voltage/current : 600V / 65A
- 2. Withstanding voltage : AC2200V/1Min.
- 3. Torque value : M4 , 10.5Lb.in
- 4. Wire range : 20~6AWG

IEC Standard

1. Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	8KV
Rate voltage(V)	800V
Rate current(A)	57A




- 2. Torque value : M4 , 1.2N·m
- 3. Wire range : 0.2~10mm²

NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 10.2mm, Poles : N=01P
- 3. Stripping length : 10~11mm
- 4. Operating temperature: -40°C~+105°C
- 5. Undimensioned tolerances:

Pitch Range	In		Nominal		Dimension		Range
	mm	In	mm	In	mm	In	
6	Over	6	Over	10	Over	30	Over
	To	10	To	10	To	60	To
10	Over	10	Over	24	Over	100	Over
	To	24	To	30	To	150	To
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30
	±0.30	±0.50	±0.70	±1.00	±1.30	±1.50	±2.0

6. RoHS Compliance

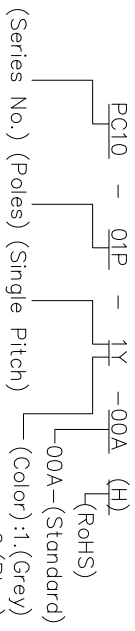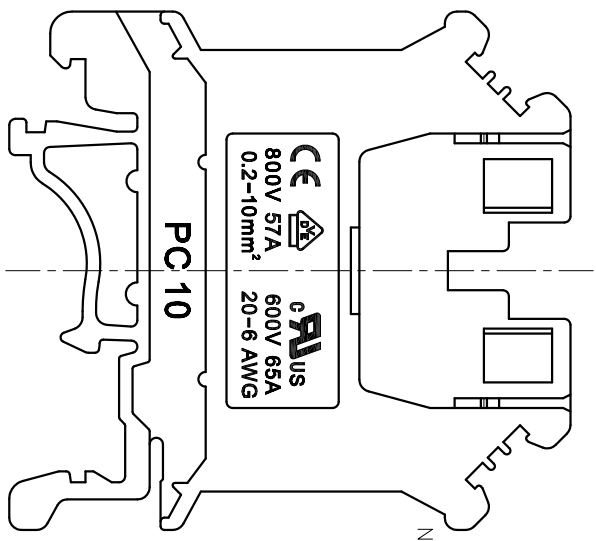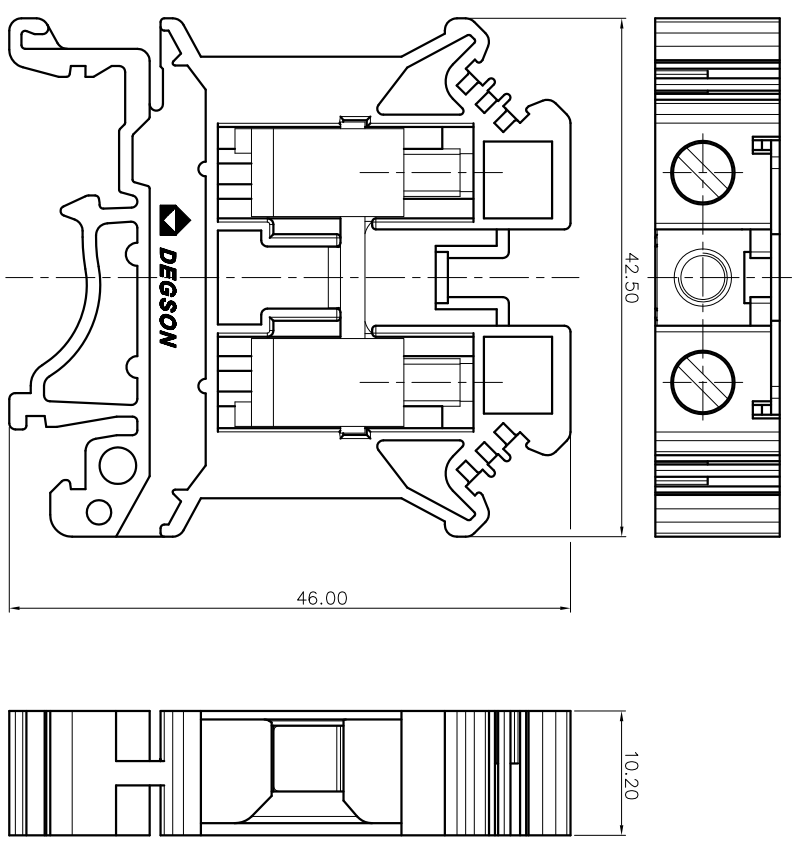

- 1. (Grey)
- 2. (Blue)
- 3. (Black)
- 4. (Green)
- 5. (Orange)
- 6. (Red)
- 7. (Transparent)
- 8. (Yellow)
- 9. (White)

DETACHED LISTS			
PART NO.:	/	NAME:	NINGBO DEGSON ELECTRICAL CO., LTD
APPD:	/	APPD:	NINGBO DEGSON ELECTRICAL CO., LTD
CHKD:	/	CHKD:	NINGBO DEGSON ELECTRICAL CO., LTD
DRFT:	/	TITLE:	CUSTOMER DRAWING
THIRD ANGLE PROJECTION		DRAWING NO.:	/
		DO NOT SCALE DRAWING	SCALE
			1:1