
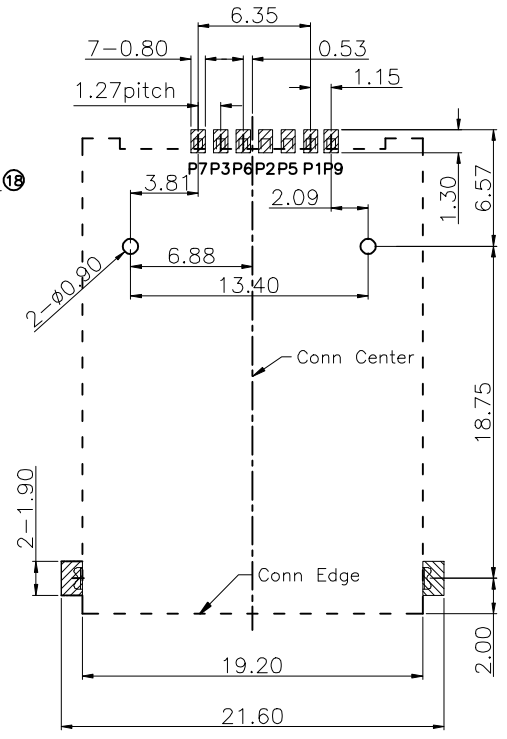
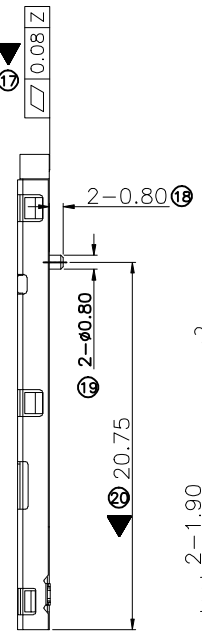


REV.	ECN.NO.	MODIFY.CONTENT	DATE
A		NEW	2012/12/31
B		Surface finishing update release	2016/03/03


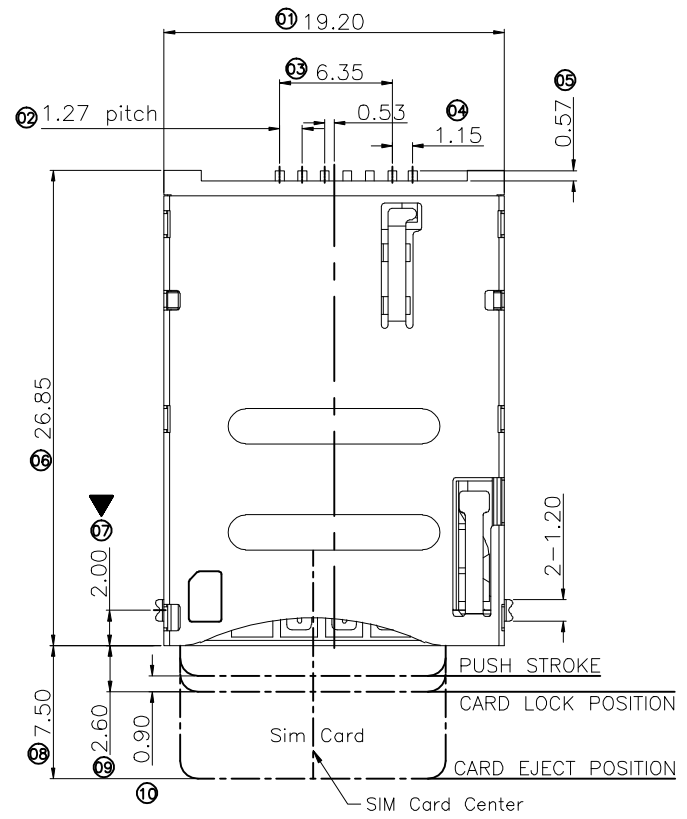


Specification:

- \*Electrical Characteristics:
  - Current Rating:0.5A.
  - Withstanding Voltage:AC500V r.m.s.
  - Insulation Resistance:1000Megohms Minimum at DC 50V
  - Contact Resistance:100Miliohms Maximum.
- \*Mechanical Characteristics:
  - Mating Cycles:5000 Insertions.
- \*Environmentl:
  - Operating Temperature:-40°To+60°
- \*Material:
  - 1.Housing:HI-Temp plastic UL 94V-0 Rated.
  - 2.Contact:Copper Alloy.
  - 3.Shell:SUS.
- \*Finish :
  - 1u" Gold plated on conact area,100u"Min Tin plated on solder tails, Base Nickel :50u"Min
- \*Packing:
  - Number of connectors:750Pcs/REEL
- \*Measure:
  - ▼ Marked as the key test of QC and IPQC
  - ⊗ Marked as FAI test size

\*PART NO.

ASMF S XXX X 01 B R 015  
 SMT TYPE  
 APPEARANCE  
 SHELL PLATED  
 PACK: T/R  
 B:BLACK  
 CONTACT PLATED  
 01:1u"  
 03:3u"  
 05:5u"  
 10:10u"

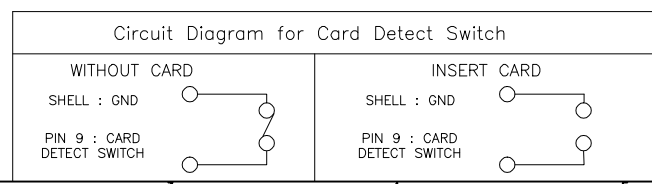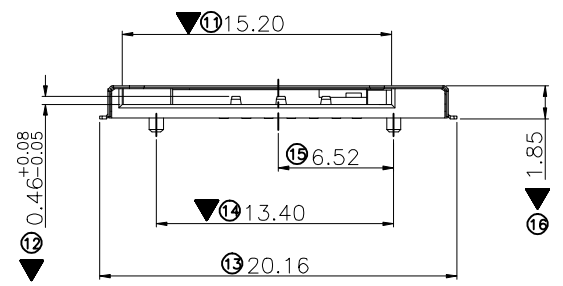

Connector terminal NO.	Pin NO.
Pin 1	VCC:PWR signal and GND
Pin 2	RST:Reset signal
Pin 3	CLK:Clocking signal
Pin 5	GND:PWR signal and GND
Pin 6	VPP:Porgramming Voltage
Pin 7	I/O:Serial date input/output

GENERAL TOLERANCE	DWG NO.	LZA1231-001	APPD:	Achilles	Scale	1:1
X.±0.20	x.±5°	Title	CHKD:		UNIT	mm
.X±0.15	.x'±2'		DR:		Visual	↔
.XX±0.08	.xx'±1'	Part NO.	Date	2016/03/03	Edition	B
.XXX±0.05	.xxx'±0.5'	<b>东莞市捷圣泰电子科技有限公司</b> <b>Dongguan JASSTA Electronics Co.,LTD</b>				
SHEET	1/1					