

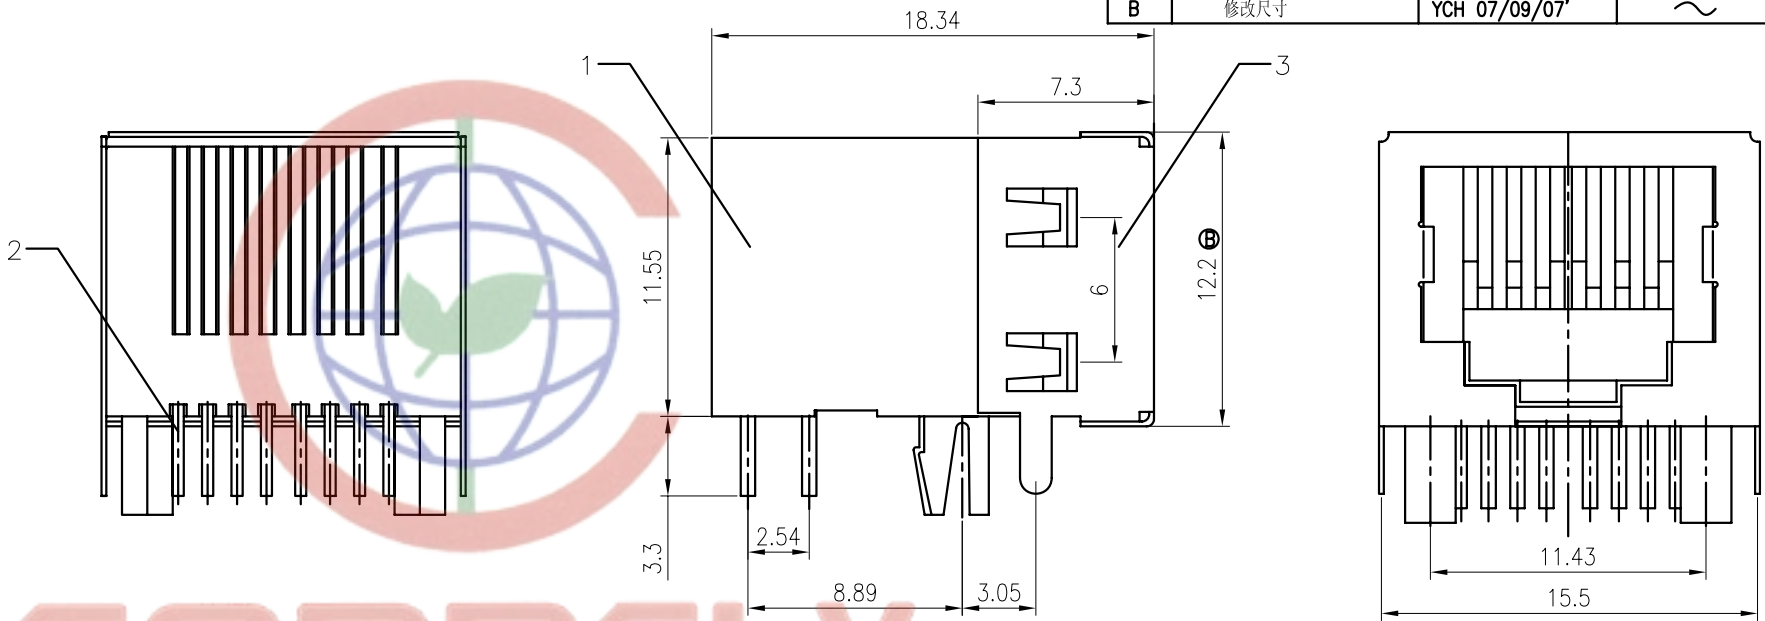


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 03/26/06'	~	LJC 07/09/07'
B	修改尺寸	YCH 07/09/07'	~	



SPECIFICATION
 1. Insulation Resistance:1000MΩ Min.
 2. Withstand Voltage:500V AC/Minute.
 3. Durability:600 Cycles Min.

4. Product Number Code:
 DS1125 - X X X X X
 Housing Materials
 P:PBT
 N:NYLON
 Housing Color
 B:Black
 Contact Plating
 0:Gold Flash
 3:Selective 3u" Gold Flash
 (6;15;30)Micro Inch
 No.Of Contacts
 4:8p4c 6:8p6c 8:8p8c
 Connector Type
 S:Socket
 Series No.
 DS1125

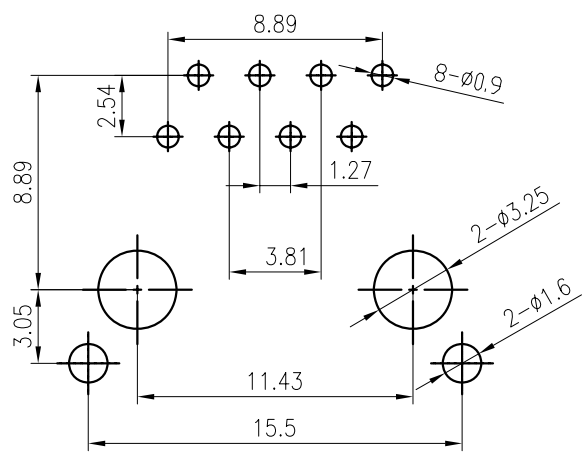

el: 86-574-63508787
 Fax: 86-574-63510817

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	±0.60	X.	±5°		PCB JACK 8P(side EMI)
.X	±0.38	.X	±3°	mm	SHEET SIZE A4
.XX	±0.25	.XX	±2°		SERIES DS1125 SERIES
DRAWING TYPE CUSTOMER		SCALE 1:1		SHEET 1 OF 1	
DRAWING NO. C-DS1125-XXXXX		晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			

No.	PART NAME	QTY	MATERAIL	REMARK
(3)	SHIELDING	1	COPPER ALLOY WITH NICKEL PLATED	0.20mm THICKNESS
(2)	PIN		PHOSPHOR BRONZE	GOLD-PLATING OVER NICKEL
(1)	HOUSING	1	PBT	UL94 V-0 OR 94 V-2

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)