


A-A

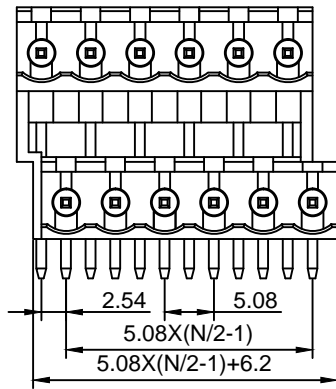

B向





Material :

- (a) Housing : PA66(UL94V-0)
- (b) Pin Header 1 : Brass ,Tin Plated
- (c) Pin Header 2 : Brass ,Tin Plated



Electrical :

- 1.Rated Voltage : 300V UL IEC 320V
- 2.Rated Current : 15A 10A
- 6.Withstanding Voltage : AC1600V/1Min.
- 7.Operating Temperature : -40°C~+105°C
- 8.RoHS Compliance
- 9.Safety Approval :
- 10.Undimensioned Tolerances:

Pitch Range In mm		Nominal Dimension Range In mm					-	∩	∇
≤6	6 ~ 10	10 ~ 24	≤30	30 ~ 60	60 ~ 100	100 ~ 150	>150	0.05/10	
±0.10	±0.15	±0.25	±0.20	±0.30	±0.50	±0.70	±1.00	±0.1°	

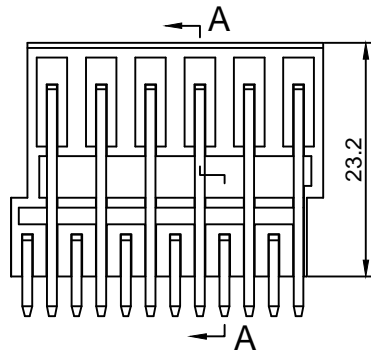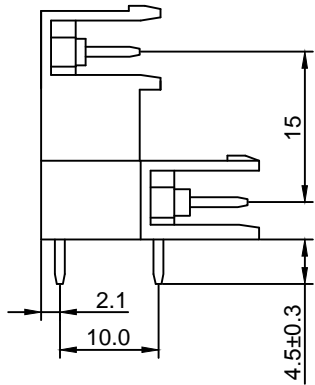

- ① Series No.
- ② Pitch
- ③ Poles
04 04Contacts
06 06Contacts
...
48 48Contacts
- ④ 1 Single Pitch
2 Double Pitch
- ⑤ Color: 1 Grey
2 Blue
3 Black
4 Green(Standard For AH)
5 Orange
6 Red
7 Transparent
8 Yellow
9 White
- ⑥ Customer Request: 00--Standard
- ⑦ AH--Standard(PA66)

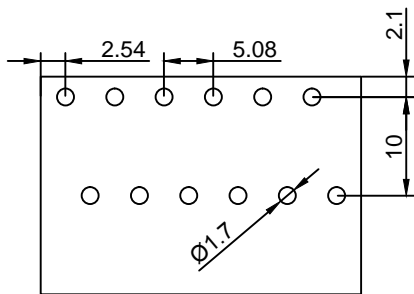

DETACHED LISTS	Grolten NINGBO GOLTEN ELECTRONICS CO., LTD.		宁波冠泰电子有限公司		
	APPD: MA_5/14/16'	CHKD: Yu_5/13/16'	PART NO. 2EGTRT-5.08-XXP-XX-00AH		
	DRFT: Chen_5/12/16'	DRAWING NO.		REV	1
	 THIRD ANGLE PROJECTION		MM (INCH)	DO NOT SCALE DRAWING	SHEET 1/1
				SCALE	1/1

8

7

6

5

4

3

2

1

H

G

F

E

D

C

B

A