



Material :

- (a) Pin Header 1 : Brass ,Tin Plated
- (b) Housing : PA66(UL94V-0)
- (c) Pin Header 2 : Brass ,Tin Plated

Electrical :

- 1. Rated Voltage : 300V UL IEC
- 2. Rated Current : 15A 320V 10A
- 6. Withstanding Voltage : AC1600V/1Min.
- 7. Operating Temperature : -40°C~+105°C
- 8. RoHS Compliance
- 9. Safety Approval :
- 10. Undimensioned Tolerances:



Pitch Range In mm			Nominal Dimension Range In mm					-	∩	∇
≤6	6 ~ 10	10 ~ 24	≤30	30 ~ 60	60 ~ 100	100 ~ 150	>150	0.05/10		
±0.10	±0.15	±0.25	±0.20	±0.30	±0.50	±0.70	±1.00	±0.1°		

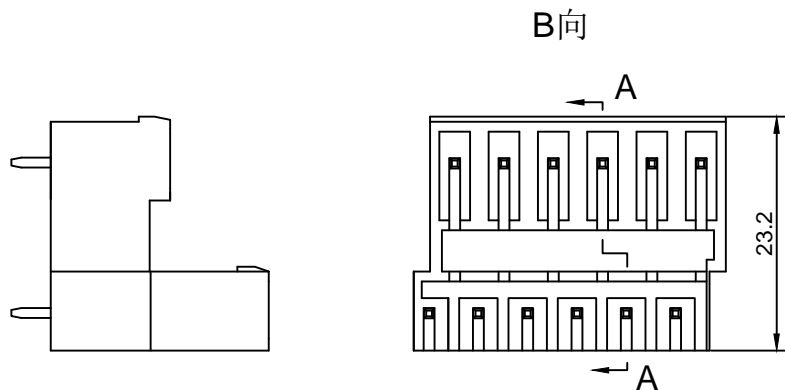

2EGTVTC - 5.08 - XXP - X X - XX AH

① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② Pitch
- ③ Poles
04 04Contacts
06 06Contacts
...
48 48Contacts
- ④ 1 Single Pitch
2 Double Pitch
- ⑤ Color: 1 Grey
2 Blue
3 Black
4 Green(Standard For AH)
5 Orange
6 Red
7 Transparent
8 Yellow
9 White
- ⑥ Customer Request: 00--Standard
- ⑦ AH--Standard(PA66)

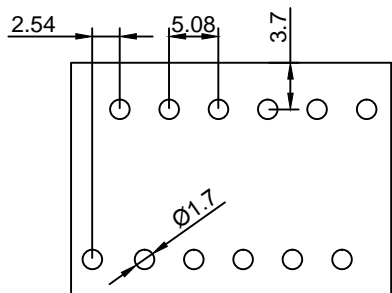

DETACHED LISTS	Grolten NINGBO GOLTEN ELECTRONICS CO., LTD.		宁波冠泰电子有限公司		
	APPD: MA_4/13/17'	CHKD: Yu_4/12/17'	PART NO. 2EGTVTC-5.08-XXP-XX-00AH		
	DRFT: Chen_4/11/17'	DRAWING NO.		REV	1
	THIRD ANGLE PROJECTION		MM (INCH)	DO NOT SCALE DRAWING	SHEET
				SCALE	1/1