




REV	DESCRIPTION	DRAFT	DATE

Electrical:


- UL Standard
- 1. Rated voltage: 300V
- 2. Rated current: 15A

IEC Standard


1. Pollution degree	2
Overvoltage category	III
Rate impulse voltage(KV)	4.0
Rate voltage (V)	320
Rate current (A)	20

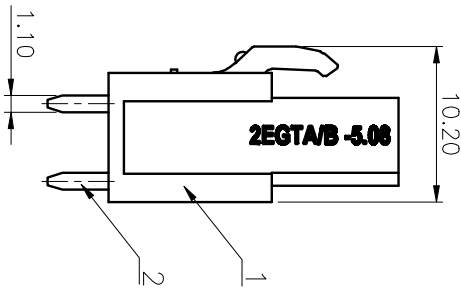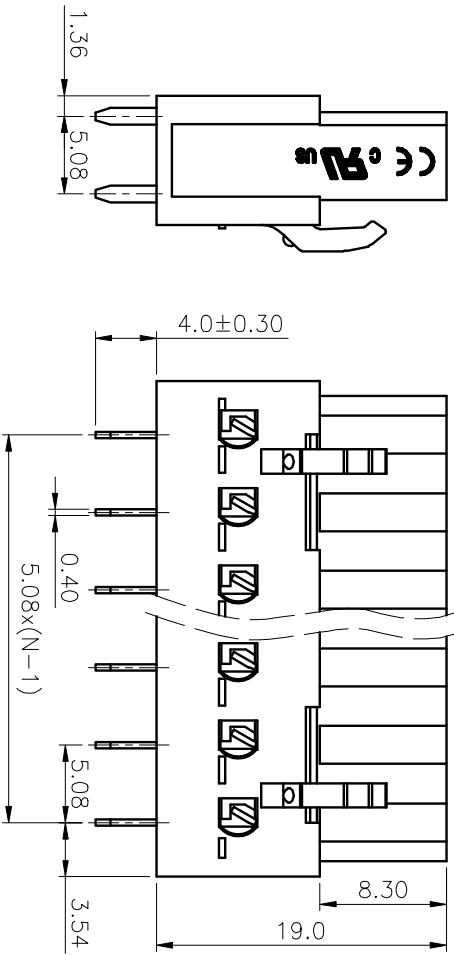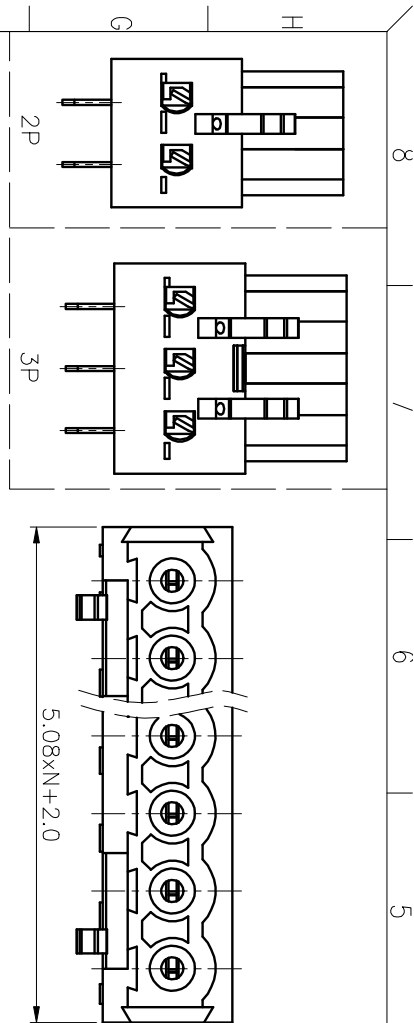

Pitch Range	In mm	Nominal Dimension Range	In mm
≤6	~	≤30	~
10	~	60	~
~	24	100	~
~	~	150	~
~	~	>150	~
±0.15	±0.20	±0.30	±0.30
±0.30	±0.30	±0.50	±0.70
±1.00	±1.00	±1.30	±1.30
±2	±2	±2	±2

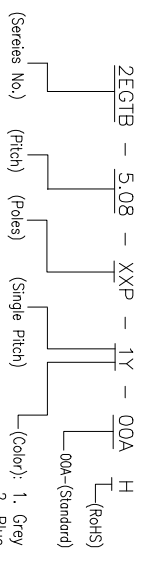

- (Series No.) (Pitch) (Poles) (Single Pitch) (Color):
- Grey
  - Blue
  - Black
  - Green
  - Orange
  - Red
  - Transparent
  - Yellow
  - White

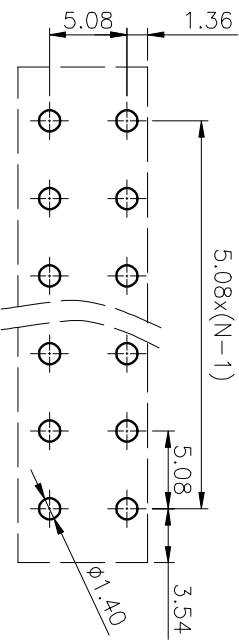

PCB LAYOUT

ITEM	NAME OF PART	MATERIAL	NOTES
2	Pin Header	Copper alloy	Sn Plated
1	Housing	PA66	UL94V-0

DETACHED LISTS

**Gröten**  
NINGBO GOLTEN ELECTRONICS CO., LTD.

**宁波冠泰电子有限公司**

NAME: 2EGTB-5.08-XXP-1Y-00AH

APPD: MA\_06/09/19 '19

CHKD: YU\_06/09/19 '19

DRT: Nick\_06/09/19 '19

TITLE: CUSTOMER DRAWING

DRAWING NO.: 2EGTB-5.08-C01

DO NOT SCALE DRAWING

REV: T0-1

SHEET: 1/1

SCALE: 1:1