
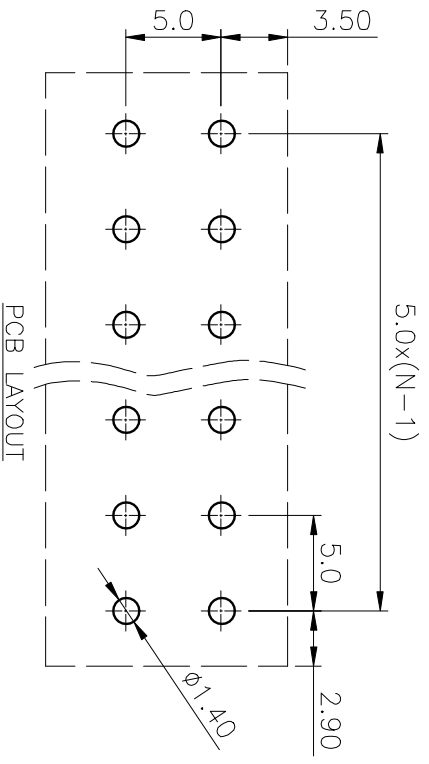
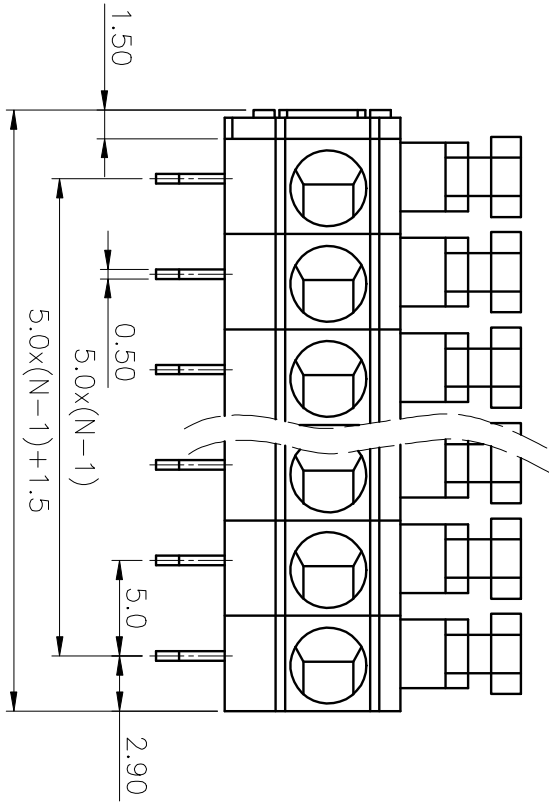



REV	DESCRIPTION	DRFT	DATE

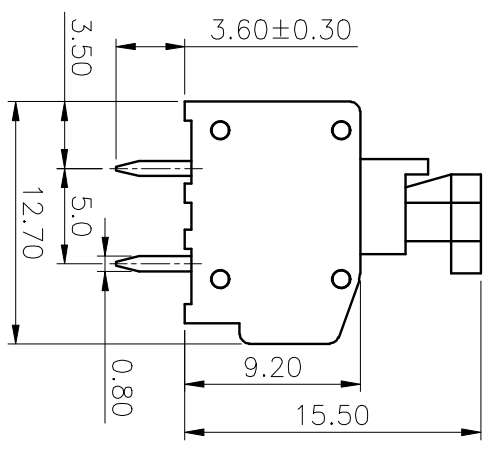

- Electrical:
- UL Standard
 - 1. Rated voltage: 300V
 - 2. Rated current: 10A
 - 3. Wire range: 20~14AWG
- IEC Standard
- 1. Rated voltage: 250V
 - 2. Rated current: 15A
 - 3. Wire range: 0.2~1.5mm²

- Notes :
1. Pitch: 5.0mm, Poles: N=01~XXP
 2. Stripping Length: 10mm
 3. Withstanding voltage : AC2000V/1Min.
 4. Operating temperature : -40°C~+105°C
 5. RoHS Compliance
 6. Undimensioned Tolerances:

Pitch	Range	In mm	Nominal Dimension	Range	In mm	mm
≤6	~	10	~	≤30	~	0.1/10
10	~	24	~	60	~	150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00
						±1.30
						±2

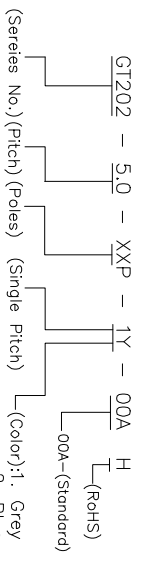

- (Series No.) (Pitch) (Poles) (Single Pitch) (Color):
1. Grey
 2. Blue
 3. Black
 4. Green
 5. Orange
 6. Red
 7. Transparent
 8. Yellow
 9. White

ITEM	NAME OF PART	MATERIAL	NOTES
5	Pin Header	Copper alloy	Sn Plated
4	Spring	Stainless steel	/
3	Button	PA66	UL94V-0
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

Golden
NINGBO GOLDTEN ELECTRONICS CO., LTD.

APPD: MA_06/09/19 ' NAME: GT202-5.0-XXP-1Y-00AH
 CHKD: YU_06/09/19 ' TITLE: CUSTOMER DRAWING
 DRFT: Nick_06/09/19 ' DRAWING NO.: GT202-5.0-C01

THIRD ANGLE PROJECTION

REV	TO
SHEET	1/1
SCALE	1:1

