
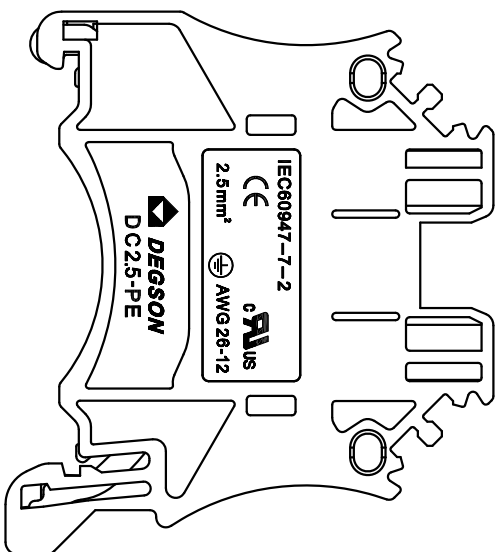

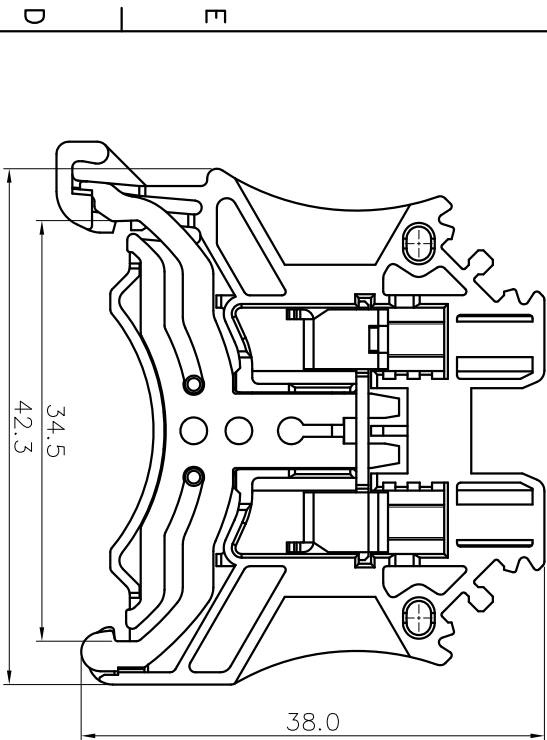


REVISION RECORD

REV	ECN	DESCRIPTION	J/FT	DATE

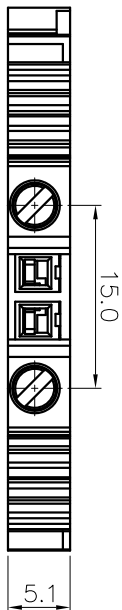

NOTES1:

- UL Standard
- 1. Torque value : M2.5 , 3.54Lb.in
- 2. Wire range : 26~12AWG
- IEC Standard
- 1. Torque value : M2.5 , 0.4N·m
- 2. Wire range : 0.2~2.5mm²

NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 5.1mm, Poles : N=01P
- 3. Stripping length : 8~9mm
- 4. Operating temperature: -40C~+105°C
- 5. Undimensioned tolerances:

Pitch Range	Nominal Dimension		Range		Tolerance			
	mm	In	mm	In				
Over 6	10	TO	30	60	Over 150			
10	10	TO	100	100	150			
6	10	24	60	100	150			
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2*

6. RoHS Compliance

DC2.5-PE - 01P - 1C - 00A (H)  
 (Series No.) (Poles) (Single Pitch) (Color) :1.(Grey)  
 (RoHS)  
 00A-(Standard)

- 1.(Grey)
- 2.(Blue)
- 3.(Black)
- 4.(Green)
- 5.(Orange)
- 6.(Red)
- 7.(Transparent)
- 8.(Yellow)
- 9.(White)
- C.(Yellow and green)

/			NINGBO DEGSON ELECTRICAL CO., LTD	宁波高松电子有限公司
/				
/		DC2.5-PE-01P-1C-00A(H)		
/		CUSTOMER DRAWING		
/		DO		
/		1/1		
/		1:1		

8 7 6 5 4