
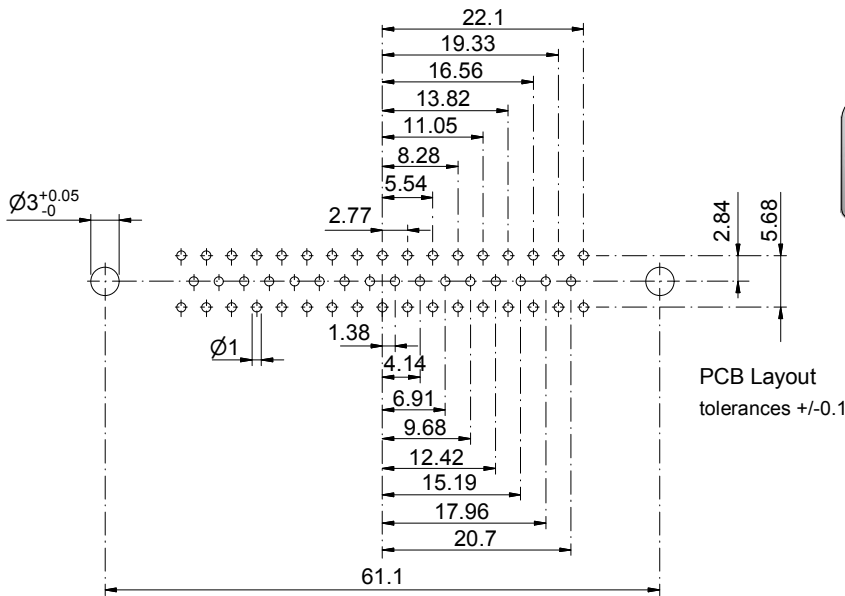
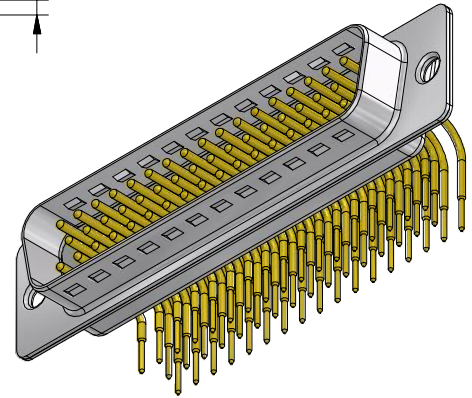
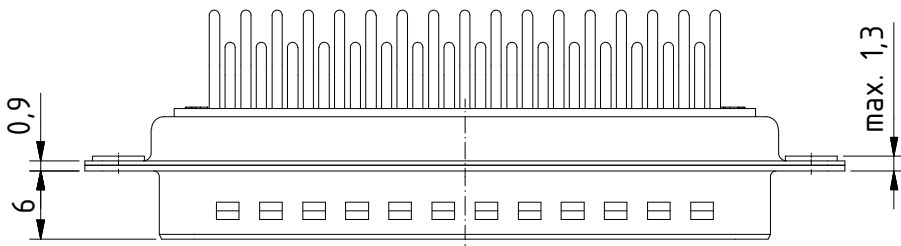
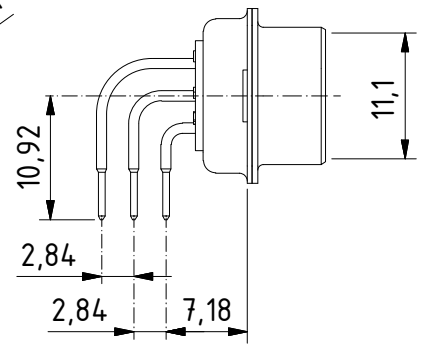


RoHS compliant

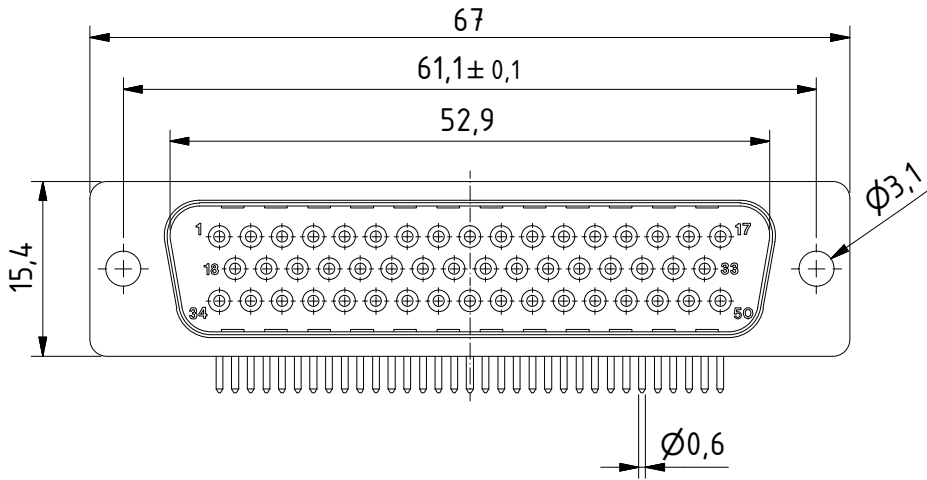

MATERIALS

- Insulator: Thermoplastic UL 94-V-0 white
- Contact: Copper alloy
- Contact finish: Quality class 2
- Shell: steel tin plated

CHARAKTERISTICS

- Working voltage: 125V
- Current rating: 5A
- Contact resistance: max. 10mΩ - DIN41652
- Insulation resistance: >5GΩ
- Temperature range: -55° to +125°C

General tolerances (Deltron standard)		
size in mm		
> 0.5	> 3	> 30
up to 3	up to 6	up to 120
tolerances		
±0.1	±0.2	±0.3

modification	Rev.	Rev.	Rev.	DE015944 part no.
	Rev.	Rev.	Rev.	
DTS50PYCA/2	1.5:1 scale	drawn	11.06.2012	mr
		checked		
		approved		
 Industrie Neuhof 8c CH-3422 Kirchberg		K060883 drawing no.		