
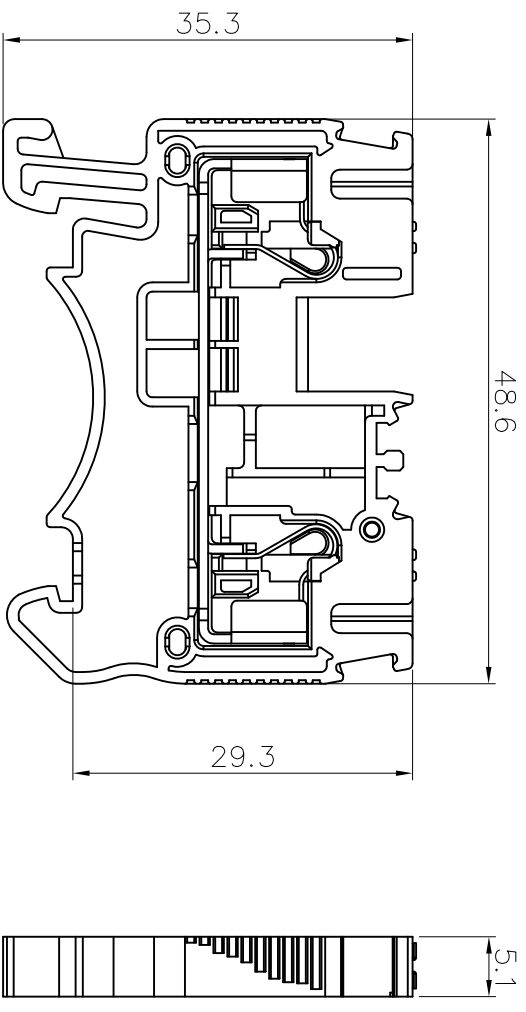



REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

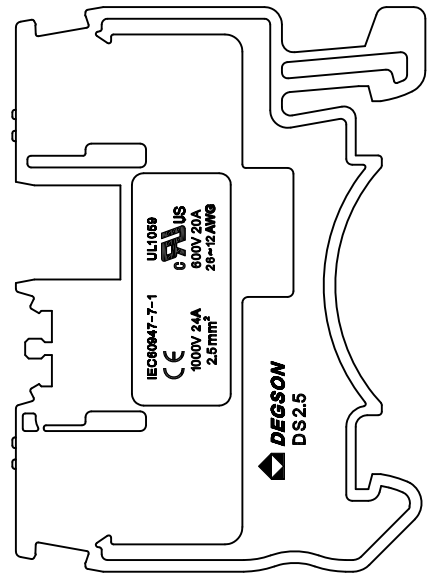

NOTES1:

- UL Standard
- 1. Rated Voltage/Current : 600V / 20A
- 2. Withstanding Voltage : AC2200V/1min.
- 3. Wire Range : 26~12AWG

IEC Standard

1. Pollution Degree	3
Overvoltage Category	III
Rate Impulse Voltage(kV)	8.0kV
Rate Voltage(V)	1000V
Rate Current(A)	24A


2. Wire Range : 0.2~2.5mm²&4mm²(sol)

NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 5.1mm, Poles : N=01P
- 3. Stripping length : 10~12mm
- 4. Operating temperature: -40°C~+105°C
- 5. Undimensioned Tolerances:

Pitch	Range	In	Nominal	Dimension	Range	Over	Over	Over	Over	Over	
mm		In	mm		mm	mm	mm	mm	mm	mm	
TO	6	TO	10	TO	30	TO	60	TO	100	TO	150
6	10	24	30	60	100	150	±2				
±0.15 ±0.20 ±0.30 ±0.50 ±0.70 ±1.00 ±1.50											

6. RoHS Compliance

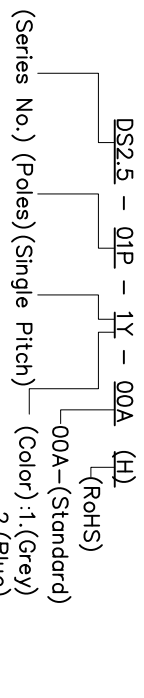

- 1.(Grey)
- 2.(Blue)
- 3.(Black)
- 4.(Green)
- 5.(Orange)
- 6.(Red)
- 7.(Transparent)
- 8.(Yellow)
- 9.(White)

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON [®] NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
APPD:	/	DRFT:	REV
CHKD:	/	TITLE:	CUSTOMER DRAWING
DRFT:	/	DRAWING NO.:	/
		THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING
		SCALE	1:1