


Customer ' s name 客户名称 :					Customer recognizes 客户承认:
NO. 序号	Specified voltage and frequency 额定电压及频率	Specified capacity and capacity deviation 额定电容及电容偏差	Over all dimension 外形尺寸 (mm) ($\phi D \times H$) \pm	Remark 备注	
1	450VAC 50/60Hz	2 μ F \pm 5%	$\phi 30 \times 57$ M8		
2	450VAC 50/60Hz	3 μ F \pm 5%	$\phi 30 \times 57$ M8		
Carry out standard 推行标准	GB 3667.1-2016/IEC60252-1: 2013				
Operating temp range 使用温度范围	-25 \sim +70 $^{\circ}$ C	Lifespan garden 寿命等级	C CLASS		
Withstanding standard 耐电压	Between terminals 端子相互间	2.0UN 2S no breakdown flashover 2.0UN 2S无击穿及飞弧现象			
	Terminals to case 端子与外壳间 (金属外壳)	-----			
Capacitance tolerance 电容偏差	\pm 5%				
Loss angle tangent	\leq 0.0020 (100 Hz)				
	Shape	See right picture			
	Condenser fuse	Have self-healing			

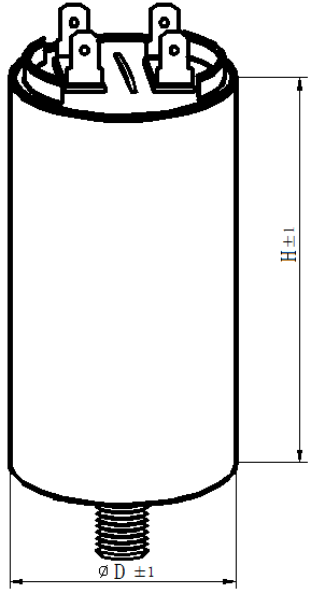

	Case	White of plastics outer shell	Drafts system:	Name:CBB60 metallized polypropylene film capacitor. CBB60
	Terminals	250# Terminal 2+2 250 2+2	Approval	
	Filling	Epoxy resin		