
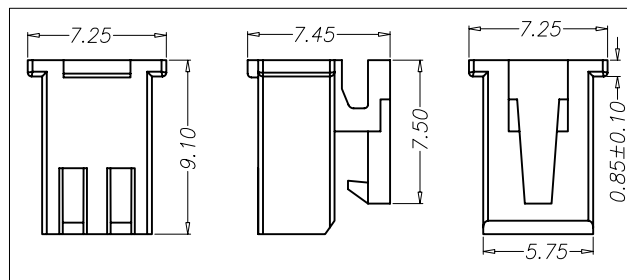


RoHS

REVISION DATE		
ITEM	DESCRIPTION	DATE
A	Issue	

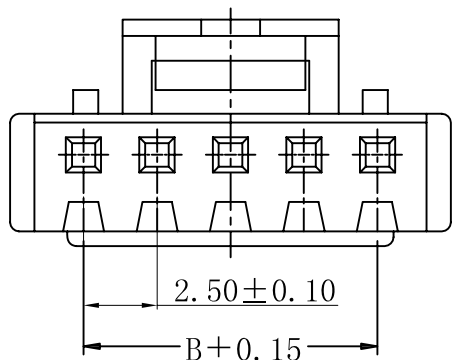





2pin

■ SPECIFICATIONS

- Voltage rating: 250V AC/DC
- Current rating: 3.0A AC/DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000mΩ Min.
- Temperature range: -25°C - +85°C
- Contact resistance: 20mΩ Max.

HOUSING

- Part No.: JVT2501HNO-XX
- Poles: 02-16
- Material: Nylon 66 UL 94V-0
- Q' ty: 1000PCS/Bag

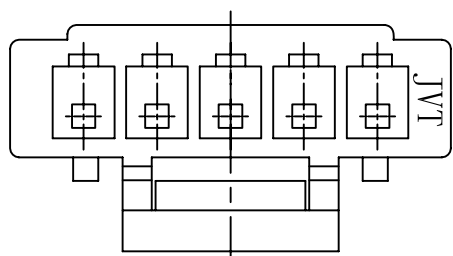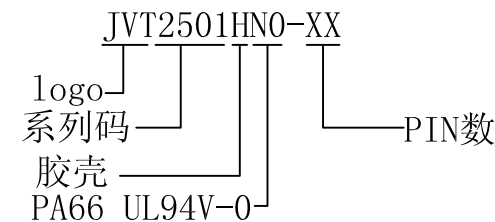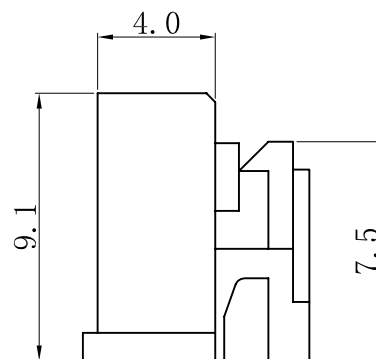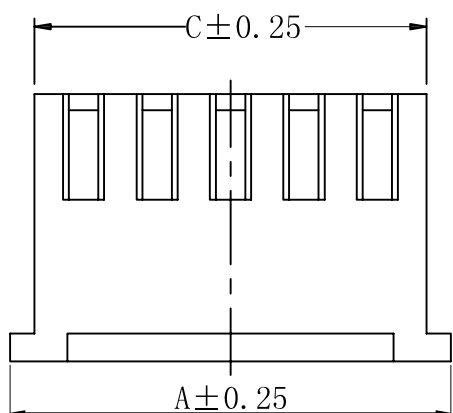

Poles	Dimensions (mm)			Poles	Dimensions (mm)		
	A	B	C		A	B	C
2	7.25	2.50	5.75	10	27.25	22.50	25.75
3	9.75	5.00	8.25	11	29.75	25.00	28.25
4	12.25	7.50	10.75	12	32.25	27.50	30.75
5	14.75	10.00	13.25	13	34.75	30.00	33.25
6	17.25	12.50	15.75	14	37.25	32.50	35.75
7	19.75	15.00	18.25	15	39.75	35.00	38.25
8	22.25	17.50	20.75	16	42.25	37.50	40.75
9	24.75	20.00	23.25				

投影 (PROJECT)		公差 (TOLERANCE)	
单位 (UNIT)	mm	0 ± 0.50	
比例 (SCALE)	FIT	0.0 ± 0.30	
版本 (EDITION)	A	0.00 ± 0.20	
日期 (DATE)	2012 05 14	0.000 ± 0.10	

东莞市乔业电子有限公司
DONG GUAN CHYAO YEE (JVT) CONNECTORS CO., LTD.

绘图 (DRAWN)	TONY	料号 (PART NO)	JVT2501HNO-XX	页次 (PAGE)	
审核 (CHECKED)	CHEN	图号 (DRAW NO)	031-2501	1/1	
核准 (APPROVE)		品名 (NAME)	XHB2.5mm HSG		