
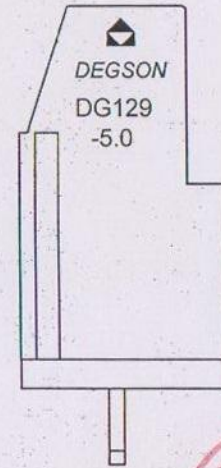
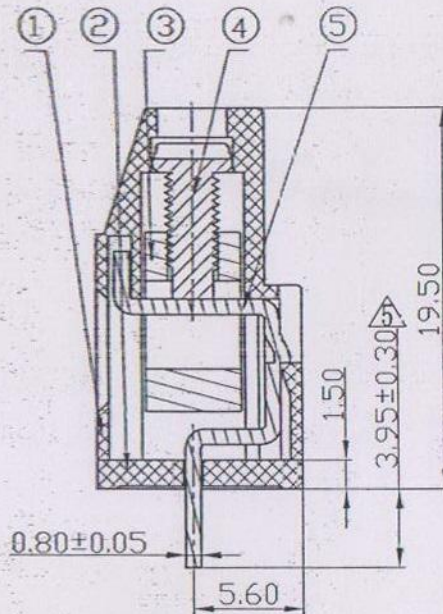
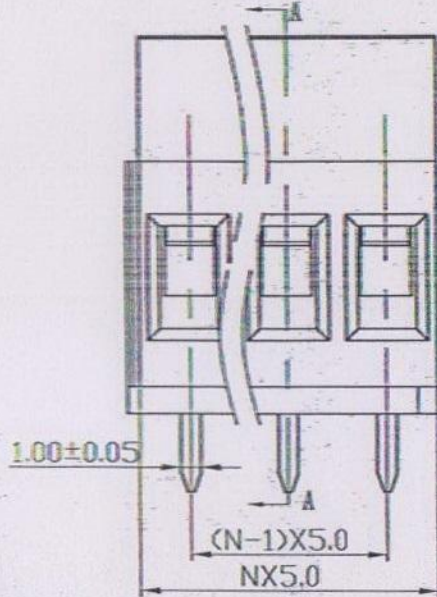
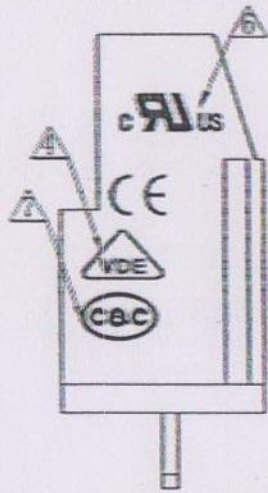


REVISION RECORD				
REV	ECD	DESCRIPTION	DRFT	DATE
3		Drawing Revise	Haoyh	03/30/08
4		增加VDE刻字	CSX	01/12/07
5		出脚由3.85改为3.95±0.30	CSX	02/03/07
6		UL标志中去掉小R	CSX	06/09/07
7	11-0280	增加CCC刻字	ZMT	12/17/11

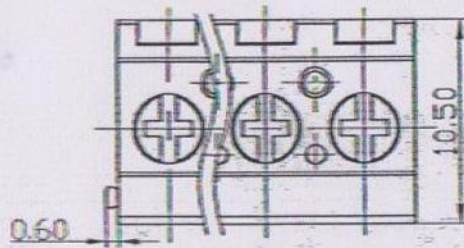

Notes:

- Pitch: 5.0mm, Poles: 2-XXP
- Rated voltage/current: UL 300V/20A
VDE 250V/20A
- Operation temperatures: -40°C ~ +105°C
- Withstanding Voltage: AC2000V/1min
- Insulation Resistance: 5000MΩ/DC1000V
- Wire Range: 26~12AWG, 0.5~2.5mm²
- Max. Torque Value: M3, 5.1kgf.cm
- Undimensioned Tolerances:

Pitch range in mm	Nominal dimension range in mm						—		
	over 6 to 10	over 10 to 24	over 30 to 60	over 60 to 100	over 100 to 150	over 150			
to 6	±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1	0.05/0.08

SECTION A-A

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
5	DG129-Pin header	4029B00010 (H)	XX	Barss	SnCu
4	DG129-“+”Screws-M3	S000001730	XX	Steel	Cr Zn
3	DG129-Cage	X000000200 (H)	XX	Brass	Ni plated
2	DG129-5.0-Cover	4042COYXXA (H)	1	PA66	UL94V-0
1	DG129-5.0-Housing	4042AOYXXA (H)	1	PA66	UL94V-0

TOLERANCES EXCEPT AS NOTED: FRACTIONS: ±0.10, ±0.15, ±0.20, ±0.25, ±0.30, ±0.40, ±0.50, ±0.63, ±0.80, ±1.00 DECIMALS: ±0.05, ±0.08, ±0.10, ±0.15, ±0.20, ±0.25, ±0.30, ±0.40, ±0.50, ±0.63, ±0.80, ±1.00 ANGLES: ±1° THIRD ANGLE PROJECTION	DTC: LHM DATE: 10/06/05 CHK: MFB DATE: 12/17/11 APPV: 2/5/06 DATE: 12/17/11 MATERIAL: GE FINISH:	NAME: DEGSON NO. OF PART: DG129-5.0-XXP-1Y-02A(H) DRAWING NO.: DG129-5.0-E06 /PART NO.: DO NOT SCALE DRAWING	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD. SIZE: A3 REV: T7 DATE: 12/17/11 SHEET 1 OF 1
---	---	--	---

